



Butterfly Valve

Ball Valve

Gate Valve

Globe Valve

Check Valve

Pipe Fittings

## Product Description



### Super Anti-corrosion

Epoxy powder coating **200-250µm**, baking varnish over **200°C**, use  material.



Free wedge nut, reduces the **stem bending forces** and at the same time enables it to be easily replaced.



The more compact new cap, reduces the water retention areas in order to **reduce the risk of bacterial growth**.



One piece stainless steel stem in for better resistance to axial load and to withstand higher operating torques.



**Three locking tab** for bayonet system prevents self-dismantling.



Dust guard integrating three O-ring shape, prohibiting the introduction of foreign bodies at the stem.



**Male guiding system with composite sliding skate** reduces the wear of the wedge against the body, allowing a smooth functionality and a longer life time of the valve.



Triple seal at the operating stem to ensure tightness with the test of time (2500 cycles).



New male composite sliding skate technology ensuring a low operating torque even under high differential pressure and preventing damage or corrosion generated by the friction.

# Our Factory



◎本公司主要生产以下产品：

✓ 球阀CNC球阀电动球阀气动球阀蝶阀截止阀闸阀止回阀

✓ 法兰连接丝扣连接焊接连接


✓ 手轮开关电动开关气动开关

◎本公司GB国标、EN、DIN、ASME、API、ISO、CE、TUV、ISO 9001、ADWO-2000、TS、PED、WRC、WRAS、KTW、API 6D、API609、

本公司专业生产各种规格的蝶阀、球阀、止回阀、截止阀、闸阀、法兰连接、丝扣连接、焊接连接、手轮开关、电动开关、气动开关等，广泛应用于石油、化工、冶金、电力、造纸、制药、食品、市政、给排水、海水淡化、消防、船舶、航空、航天、等领域。



## Why choose us

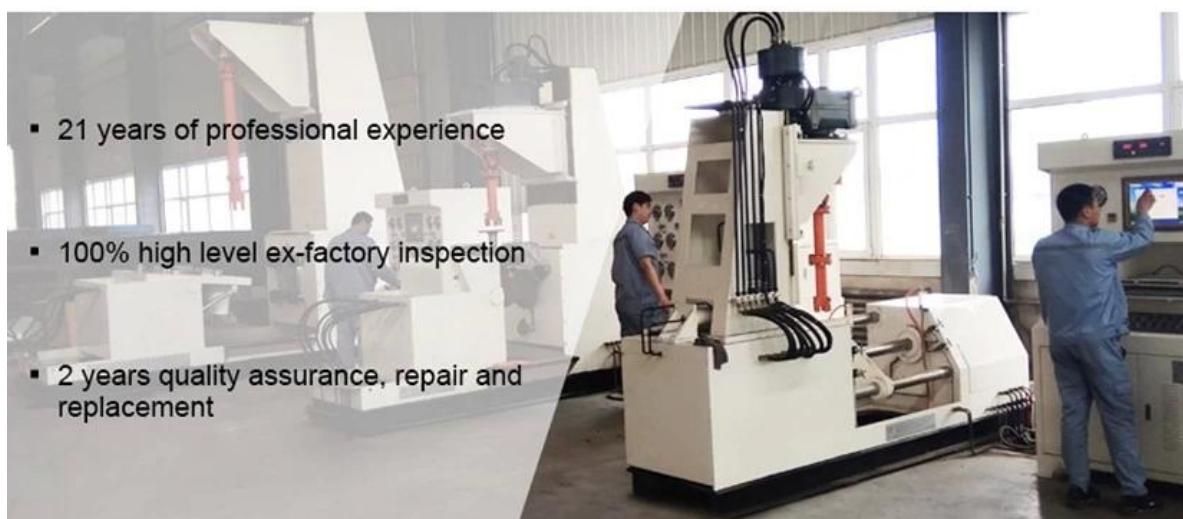

## Exhibition Photos



## Our Certificates



ISO9001

QHSE管理体系  
AQS管理体系

QHSE管理体系  
AQS管理体系

A<sub>1</sub>DN150~DN200 HDRAULIC<sub>1</sub> RKSfluid<sub>1</sub> DN150~DN200  
DN150~DN200 HDRAULIC<sub>1</sub> RKSfluid<sub>1</sub> DN150~DN200

Q<sub>1</sub>DN150~DN200 HDRAULIC<sub>1</sub> RKSfluid<sub>1</sub> DN150~DN200

A<sub>2</sub>DN150~DN200 HDRAULIC<sub>1</sub> RKSfluid<sub>1</sub> DN150~DN200

D<sub>1</sub>DN150~DN200 HDRAULIC<sub>1</sub> RKSfluid<sub>1</sub> DN150~DN200

A<sub>3</sub>DN150~DN200 HDRAULIC<sub>1</sub> RKSfluid<sub>1</sub> DN150~DN200

D<sub>2</sub>MOQ<sub>1</sub> DN150~DN200 HDRAULIC<sub>1</sub> RKSfluid<sub>1</sub> DN150~DN200

A<sub>4</sub>DN150~DN200 HDRAULIC<sub>1</sub> RKSfluid<sub>1</sub> DN150~DN200

Q<sub>2</sub>DN150~DN200 HDRAULIC<sub>1</sub> RKSfluid<sub>1</sub> DN150~DN200

A<sub>5</sub>DN150~DN200 HDRAULIC<sub>1</sub> RKSfluid<sub>1</sub> DN150~DN200

TUV<sub>1</sub> API<sub>1</sub> WRAS<sub>1</sub> CE<sub>1</sub> ISO<sub>1</sub> HDRAULIC<sub>1</sub> RKSfluid<sub>1</sub>

DIN<sub>1</sub> ASME<sub>1</sub> BS EN<sub>1</sub> JIS<sub>1</sub> API<sub>1</sub> AWWA<sub>1</sub> HDRAULIC<sub>1</sub> RKSfluid<sub>1</sub>

Q<sub>3</sub>DN150~DN200 HDRAULIC<sub>1</sub> RKSfluid<sub>1</sub> DN150~DN200

A<sub>6</sub>DN150~DN200 HDRAULIC<sub>1</sub> RKSfluid<sub>1</sub> DN150~DN200