#### **DESIGN FEATURES**





### TECHNICAL REQUIREMENT

- 1.Design standard:BS 5163.
- 2.Face to face:BS 5163.
- 3.Flanges standard:BS EN1092-2:1997 PN16.
- 4.Test standard:BS EN12266-1 Rate B.

#### **FEATURES**

- · Double flange metal seated gate valve
- Size Range:DN50-DN2000
- Standard-ISO/BS/DIN/AWWA/API
- Tests Standard-BS EN 12266-1
- Body Ring-Bronze/SS420/SS304/SS316
- · Body-Ductile Iron /Cast Iron/Stainless Steel /WCB
- · Fusion bonded epoxy coating-min 300 microns

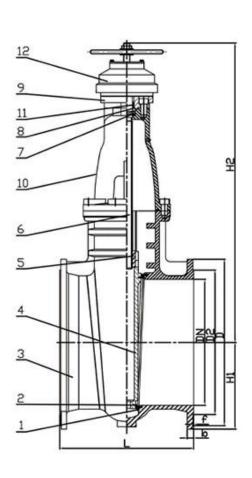

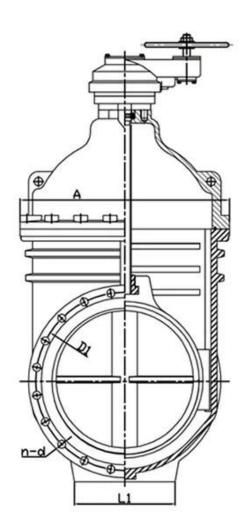

### **RELATED PRODUCTS**



SMALL DIAMETER GATE VALVE DN50-DN300,PN10/16/25



METAL SEATED GATE VALVE DN350-DN600,PN10/16/25



LARGE DIAMETER
METAL SEATED GATE VALVE
DN700-DN2000,PN10/16/25

# **APPLICATION SCENARIO**

















Industrial water application

Power plant

Sea water desalination

Water treatment

Water supply and drainage

HAVC

Food and drug Water transport







## **COMPANY INFORMATION**



business

| cention   |
|---|
| umproduct[][][][]GB[][][][][][][][]TUV CE[ISO 9001[]ADWO-200[]TS[]PED[]WRC WRA[]KTW[]API 6D[]API609[] |
|   |



































# **COMPANY EXHIBITION**

























**Partners** 





































## 

D∏Moq

A\_\_\_\_1PC\_

**Q**000000000

TUV

API

WRA

CE

ISO

DD

DD

DD

DD

 $Standard \verb| | DIN | ASME | BS EN | JIS | API | AWWA | | DID | DI$