


1. 本产品的详细规格书可在以下网址下载：
 2. 24小时服务热线：
 3. 24小时在线客服：

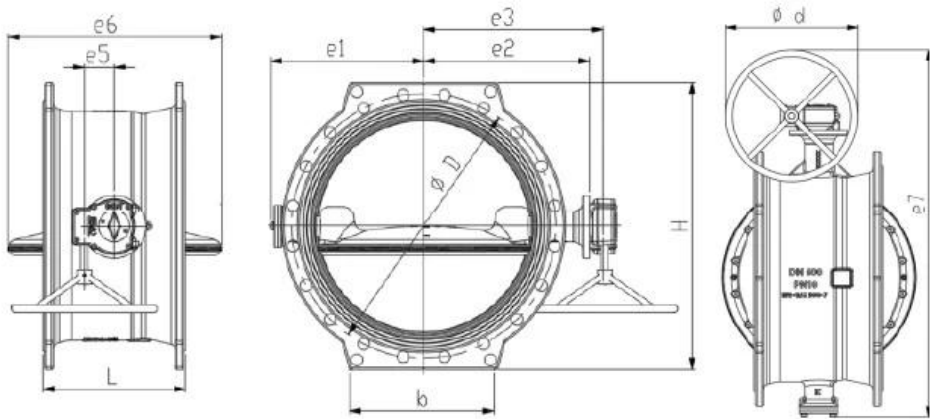

1. 本产品的详细规格书可在以下网址下载：
2. 24小时服务热线：
3. 24小时在线客服：

规格	DN200-DN1800
压力等级	PN10 PN16 PN25 PN40
材质	铸钢
温度范围	≤80°C
标准	EN 593 EN1074-1/2
重量	EN558 13 14
应用	适用于HVAC系统

APPLICATION SCENARIO



Industrial water application



Power plant



Sea water desalination



Water treatment



Water supply and drainage



HAVC



Food and drug



Water transport



COMPANY FACTORY



COMPANY INFORMATION



Advanced CNC Machining Center

Advanced CNC Machining Center Professional Process Cells

China

certification

GB American Standard Tuv CE ISO 9001 ADWO-2000 TS PED WRC
WRA KTW API 6D API609

VI

01

21 years of professional
experience

03

Independent research and
development team
28 top senior professional
researchers

05

100% high level ex-factory
inspection

07

2 years quality assurance,
repair and replacement

4 factories

02

2 professional testing
centers

04

High quality imported
materials

06

COMPANY QUALIFICATION



COMPANY EXHIBITION



Partners





A

A Hrdraulic RKSfluid USA

A RKSfluid 4

A 25

A□□□□□□□1PC□

Standard ☐ DIN ☐ ASME ☐ BS ☐ EN ☐ JIS ☐ API ☐ AWWA ☐ ☐ ☐ ☐ ☐ ☐

A RKSfluid 2770 R/D