



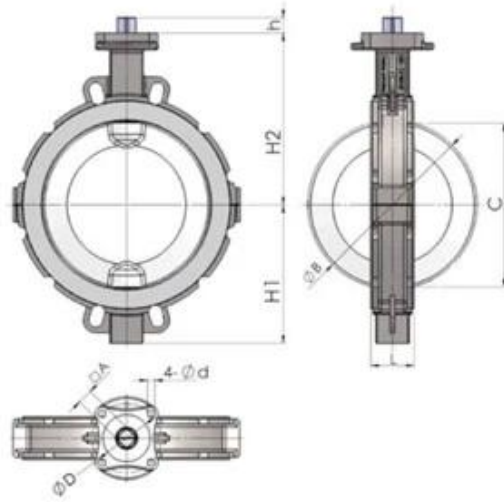

Wafer

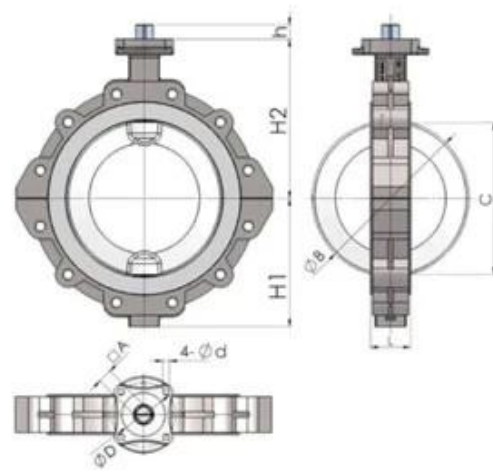

Lug

| IMPERIAL DIMENSIONS:Inches |      |      |       |      |      |       |       |      |      |         |
|----------------------------|------|------|-------|------|------|-------|-------|------|------|---------|
| Size                       | L    | H1   | H2    | h    | A    | B     | C     | D    | d    | IS05211 |
| NPS2                       | 1.69 | 2.20 | 5.31  | 0.47 | 0.43 | 2.01  | 1.08  | 1.97 | 0.28 | F05     |
| NPS2 1/2                   | 1.81 | 3.35 | 5.91  | 0.47 | 0.43 | 2.72  | 1.99  | 1.97 | 0.28 | F05     |
| NPS3                       | 1.81 | 3.74 | 6.30  | 0.63 | 0.55 | 3.27  | 2.70  | 2.76 | 0.35 | F07     |
| NPS4                       | 2.05 | 4.13 | 7.09  | 0.63 | 0.55 | 4.06  | 3.50  | 2.76 | 0.35 | F07     |
| NPS5                       | 2.20 | 4.92 | 7.68  | 0.63 | 0.55 | 5.00  | 4.49  | 2.76 | 0.35 | F07     |
| NPS6                       | 2.20 | 5.71 | 10.04 | 0.63 | 0.55 | 5.98  | 5.57  | 2.76 | 0.35 | F07     |
| NPS8                       | 2.36 | 6.69 | 9.45  | 0.83 | 0.75 | 7.99  | 7.64  | 4.02 | 0.47 | F10     |
| NPS10                      | 2.68 | 8.07 | 11.81 | 0.94 | 0.87 | 10.00 | 9.65  | 4.92 | 0.51 | F12     |
| NPS12                      | 3.07 | 9.84 | 12.20 | 1.14 | 1.06 | 12.01 | 11.61 | 4.92 | 0.51 | F12     |



PTFE Butterfly Valve

BSEN 1092, DIN 2501, ANSI, JIS, AS2129

Size: DN50~DN600

Body: Ductile Iron

Disc: Ductile Iron+PTFE

Seat: PTFE

Connection: Wafer, Lug, Flange



PTFE Butterfly Valve

BSEN 1092, DIN 2501, ANSI, JIS, AS2129

Size: DN50~DN600

Body: Ductile Iron

Disc: Ductile Iron+PTFE

Seat: PTFE

Connection: Wafer, Lug, Flange



PTFE Butterfly Valve

BSEN 1092, DIN 2501, ANSI, JIS, AS2129

Size: DN50~DN600

Body: WCB, CF8, CF8M

Disc: CF8+PTFE, CF8M+PTFE

Seat: PTFE

Connection: Wafer, Lug



PTFE Butterfly Valve

BSEN 1092, DIN 2501, ANSI, JIS, AS2129

Size: DN50~DN600

Body: WCB, CF8, CF8M

Disc: CF8+PTFE, CF8M+PTFE

Seat: PTFE

Connection: Wafer, Lug



PTFE Butterfly Valve

BSEN 1092, DIN 2501, ANSI, JIS, AS2129

Size: DN50~DN600

Body: Ductile Iron

Disc: CF8, CF8M

Seat: PTFE

Connection: Wafer, Lug, Flange



PTFE Butterfly Valve

BSEN 1092, DIN 2501, ANSI, JIS, AS2129

Size: DN50~DN600

Body: WCB

Disc: CF8 +PTFE, CF8 +PFA

Seat: PTFE

Connection: Wafer, Lug, Flange

# APPLICATION SCENARIO



Industrial water application



Nuclear plant



Petroleum



Steel



Wastewater treatment



Acid-base



Food



Irrigation



## Company Advantages

01

21 years of professional experience

03

Independent research and development team  
28 top senior professional researchers

05

100% high level ex-factory inspection

07

2 years quality assurance, repair and replacement

4 factories

02

2 professional testing centers

04

High quality imported materials

06



© 2023 RKSfluid. All rights reserved.

✓ CNC processing capabilities for various materials and sizes.

✓ Advanced manufacturing techniques ensuring high precision.

✓ Strict quality control measures throughout the production process.

✓ Compliance with international standards: GB, TUV CE, ISO 9001, ADWO-2000, TS, PED, WRC, WRAS, KTW, API 6D, API 609.



A

Q□□□□□□□□□□□□□□□□□□□□□□□□□□

A hydraulic RKSfluid

Q□□□□□□□□□□□□□□□□

A RK Sfluid 4

Q□□□□□□□

A□□□□□2~5□□□□□□□□□□□□□□□□□□□□□□□□□□□□

Q□MOQ

A□□□□□□□1□□□

Q□□□□□□□□□□

A 100 2

□□□□TUV□API□WRAS□CE□ISO□□□□□□□□

□□□DIN□ASME□BS EN□JIS□API□AWWA□□□□□□□□

Q□□□□□□□□□□□□□□□□□□□□□□□□□□

A RKSfluid 20 70