



Butterfly Valve

Ball Valve

Gate Valve

Globe Valve

Check Valve

Pipe Fittings

## DESIGN FEATURES

### VERSATILE & RANGE

- Up to **27mm** of tolerance, **DN40 ~ DN300** stock reduction
- Allows angular deflection of **+/-5°**
- Covering most common pipe materials



### USER FRIENDLY

- **Economical** and applicable
- **Easy Operation**

### OPTIMAL SEALING

- **Unique gasket** with circumferential ribs sealing on corroded, scored or pitted pipes

### DURABLE

- **Anti-corrosion**
- Thickness: Epoxy powder coating of **200-250µm**
- Temperature : Spraying temperature over **200 °C**. Doesn't fade, even wipe with **diethyl ether**

### MATERIAL

- Epoxy powder:  , Earth Best!
- Nuts: **DACROMET®** or **GEOMET®**, Earth Best!
- Cast iron: **EN-GJS-500-7**, nodularity over **95%**!



## APPLICATION SCENARIO



Industrial water application



Hydroelectric generation



Sewagetreatment



Water treatment



Water supply and drainage



Water transport



Pipe network in house




Irrigation



## Our Factory



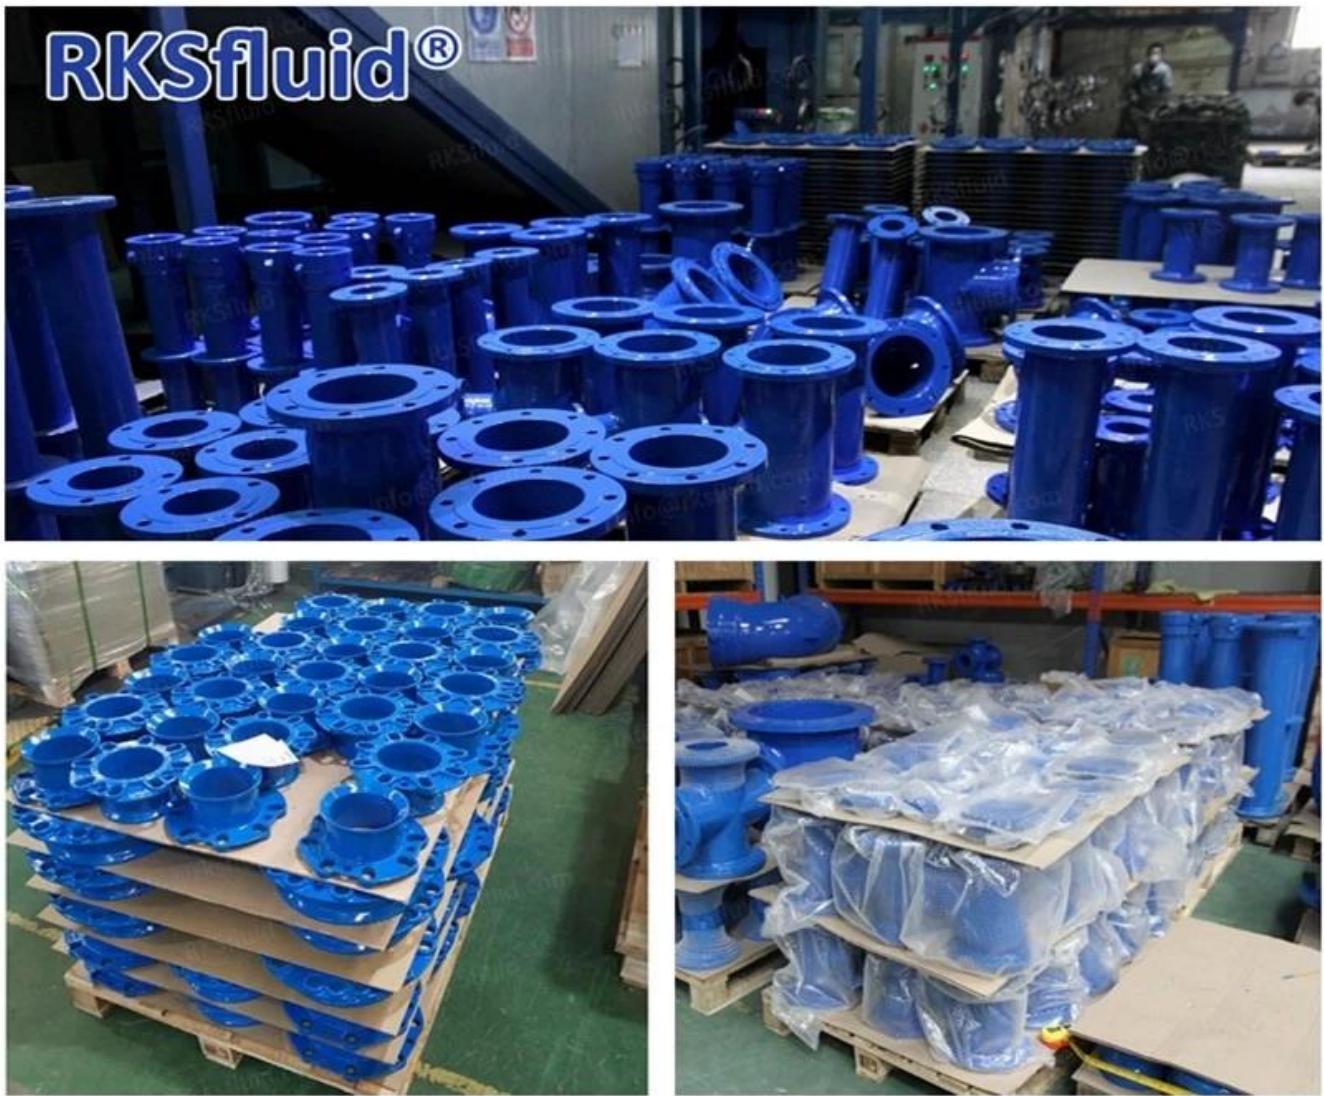

**RKSfluid®**

## Company Advantages

01

21 years of professional experience

03

Independent research and development team  
28 top senior professional researchers

05

100% high level ex-factory inspection

07

2 years quality assurance, repair and replacement

02  
4 factories

04  
2 professional testing centers

06  
High quality imported materials



I. Professional experience and technology

II. CNC processing center and professional R&D team

III. Advanced production equipment and strict quality control

IV. Complete quality certification system

V. Quality certification: GB, ISO 9001, TUV CE, ADWO-2000, TS, PED, WRC, WRAS, KTW, API 6D, API 609

VI  
RKSfluid  
RKSfluid

## Exhibition Photos



## Our Certificates



Q  
A

Q  
A

Q  
A

Q  
A

Q

A□□□□□□□□□2□5□□□□□□□□□□□□□□□□□

Q□MOQ

A\_\_\_\_\_1\_\_\_\_\_

A 100 2

TUV API WRAS CE ISO 9001 14001 45001

DIN □ ASME □ BS EN □ JIS □ API □ AWWA □ □ □ □ □ □

# QUESTION

AIRKSfluid 20170 R&D