
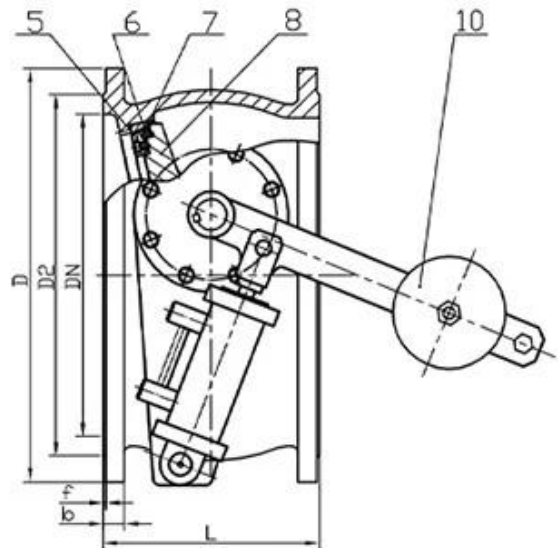


PRODUCT STRUCTURE

Features

- Size range DN100-1200mm
- Standard-ISO/ BS/DIN /AWWA/API
- Tests standard-BS EN 12266-1
- Body-Ductile Iron/Cast Iron/Stainless Steel/WCB
- Body Ring-SS420/SS304/SS316
- Disc Ring-EPDM
- Shaft-420/S5431/SS316
- Fusion bonded epoxy coating- Min 300 Microns

This series tilting check valves are suitable to be used at the exit of the pump whose medium is water. It is used to prevent or reduce medium back from water hammer. So it can protect the pipeline system. Suitable temperature $\leq 80^{\circ}\text{C}$

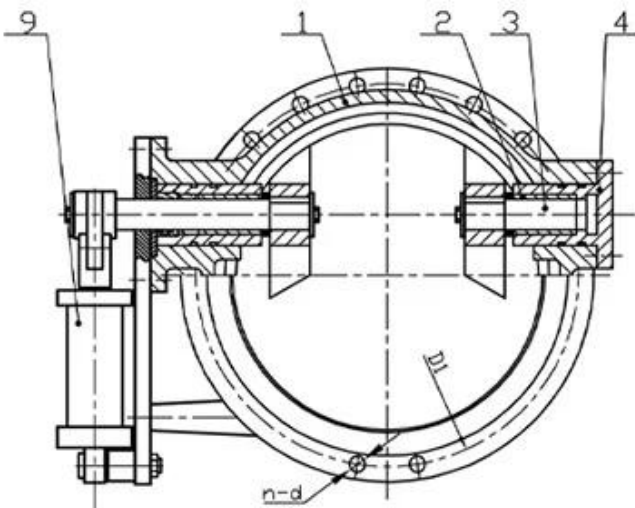

APPLICATION SCENARIO



Industrial water application



Power plant



Sea water desalination



Water treatment



Water supply and drainage



HAVC



Food and drug



Water transport



COMPANY FACTORY



i

divanced Advanced CNC

related

us

inude GB TUV CE ISO 9001 ADWO-2000 TS PED WRC WRA KTW API 6D API609

VI / /

COMPANY INFORMATION



COMPANY QUALIFICATION



COMPANY EXHIBITION



Partners



□□□□□□

Q □□□□□□□□□□□□□□□□□□□□□□□□
A □□□□□□□□□□□□□□□□□□□□□□□□□□

Q □□□□□□□□□□□□□□□□□□□□□□□□
A □□□□□□□□ hydraulic □□□□□□□□□ RKSfluid □□□□□□□□ USA □□□□□□□□□□□□□□□□□□□□□□□□

Q □□□□□□□□□□□□□□□□□□□□□□□□

A RKSfluid 4

Q

A 25

Q Moq

A 1PC

Q

A 100 2

TUV API WRA CE ISO

din asme bs en jis api awwa

Q

A RKSfluid 20 70 RD