

0000\_00 00 0000 00000000 0000 00000 00000 0 000000. 000000 0 00 0000, 00, 00 00000 000. 00000 0  
 0 000 00000 0000 00000 0 000000.

0000 00: EN1092-2 / BS4504

00 00: DIN 004 / DIN F5 / BS 5163

## DESIGN FEATURES




### Features



- Use AkzoNobel material.
- Super Anti-corrosion
- Epoxy powder coating 200-250um,
- Baking varnish over 200°C,

| NO. |                |                  |
|-----|----------------|------------------|
| 1   | Body           | GGG50            |
| 2   | Dise           | GGG40+EPDM       |
| 3   | Wedge nut      | C48600           |
| 4   | Stem           | SS431            |
| 5   | Bonnet         | GT450-10         |
| 6   | Gasket         | EPDM             |
| 7   | Y-ring         | EPDM85-90        |
| 8   | Fix ring       | CuZn21Si3/C69300 |
| 9   | Thrust bearing | C69300           |
| 10  | Seal ring      | EPDM70           |
| 11  | O ring         | NBR              |
| 12  | Retainer ring  | POM              |
| 13  | Bushing ring   | POM              |
| 14  | Gland          | SS431            |
| 15  | Dustproof ring | EPDM85           |
| 16  | Dise core      | GGG40            |
| 17  | Bolt           | SS316            |

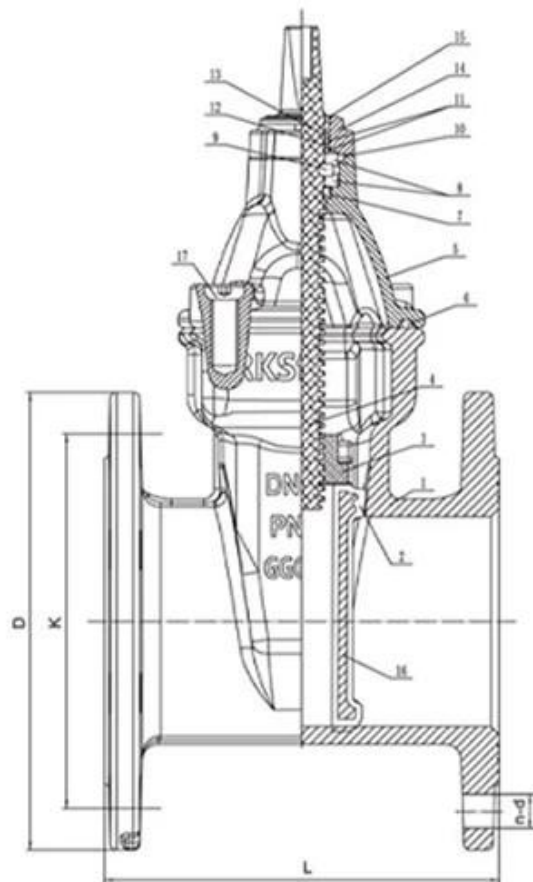



Free wedge nut, **reduces the stem bending forces** and at the same time enables it to be easily replaced.



The more compact new cap, reduces the water retention areas in order to **reduce the risk of bacterial growth**.



One piece stainless steel stem in for **better resistance to axial load and to with stand higher operating torques**.



**Three locking tab** for bayonet system prevents self-dismantling.



Dust guard integrating three O-ring shape, **prohibiting the introduction of foreign** bodies at the stem.



**Male guiding system with composite sliding skate** reduces the wear of the wedge against the body, allowing a smooth functionality and a longer life time of the valve.



**Triple seal at the operating stem** to ensure tightness with the test of time (2500 cycles).



**New male composite sliding skate technology** ensuring a low operating torque even under high differential pressure and preventing damage or corrosion generated by the friction.



## APPLICATION SCENARIO



Industrial water application



Power plant



Sea water desalination



Water treatment



Water supply and drainage



HAVC



Food and drug



Water transport





## COMPANY FACTORY



## COMPANY INFORMATION



**I** 公司: 公司, 公司 公司.

**II** 公司 CNC 公司, 公司 公司, 公司 公司, 公司 公司 公司.

**III** 公司 公司 公司, 公司 公司 公司 公司.

**VI** 公司 公司 公司 公司 公司.

**V** 公司: GB, 公司, 公司, TUV CE, ISO 9001, ADWO-2000, TS, PED, WRC WRAS, KTW, API 6D, API609.

**VI** 公司: 公司 公司, 公司, 公司 公司, 公司 公司, 公司 公司, 公司 公司, 公司/公司/公司 公司, 公司.



01

21 years of professional experience

03

Independent research and development team  
28 top senior professional researchers

05

100% high level ex-factory inspection

07

2 years quality assurance, repair and replacement

4 factories

02

2 professional testing centers

04

High quality imported materials

06



# COMPANY QUALIFICATION



## COMPANY EXHIBITION



## Partners



Delivery



Payment



## F AQ

**Q:** ٲٲٲ ٲٲٲ ٲٲ ٲٲ ٲٲٲ ٲٲٲٲٲ?

ٲ: ٲٲ" ٲٲ, ٲٲ, ٲٲ, ٲٲ, ٲٲ ٲٲٲ.

**Q:** ٲٲ ٲٲٲٲ ٲٲ ٲٲٲٲٲٲ ٲٲٲ ٲ ٲٲٲٲ?

ٲ: ٲٲٲ, ٲٲٲ, ٲٲٲ, ٲٲٲٲٲ ٲٲ. RKSfluid ٲٲٲٲٲٲ ٲٲ ٲٲٲ ٲٲٲٲٲ. ٲٲٲ ٲٲ ٲٲٲ ٲٲٲٲٲ.

**Q:** ٲٲٲ ٲٲ ٲٲٲ ٲٲٲٲٲ?

ٲ: RKSfluid ٲٲٲ ٲٲٲ ٲٲ ٲٲٲ ٲٲٲ ٲ ٲٲ 4ٲٲ ٲٲٲ ٲٲٲٲ.

**Q:** ٲٲ ٲٲٲٲ

ٲ: ٲٲ ٲٲٲ ٲٲٲ ٲٲ 2~5ٲ ٲٲٲ ٲٲٲ ٲٲٲٲ. ٲٲٲ ٲٲٲ ٲٲ ٲٲٲ ٲٲ.

ٲٲ: **MOQ**

A: ٲٲ ٲٲٲ ٲٲ 1pc.

**Q:** ٲٲ ٲٲٲ ٲٲٲٲٲ?

A: ٲٲ ٲ 100% ٲٲ ٲٲٲ, ٲٲ 2ٲ. ٲٲٲ ٲٲ ٲٲٲ ٲٲٲٲٲ.

ٲٲٲ TUV, API, WRAS, CE, ISO ٲٲٲ ٲٲٲٲٲ.

ٲٲٲ DIN, ASME, BS EN, JIS, API, AWWA ٲٲٲٲٲ.

**Q:** ٲٲٲٲ ٲٲٲ ٲٲٲ ٲٲٲٲ ٲٲٲ ٲ ٲٲٲ?

A: RKSfluid 27mm 100mm 100mm 70mm R&D 100mm 100mm, 100mm 100mm 100mm.