
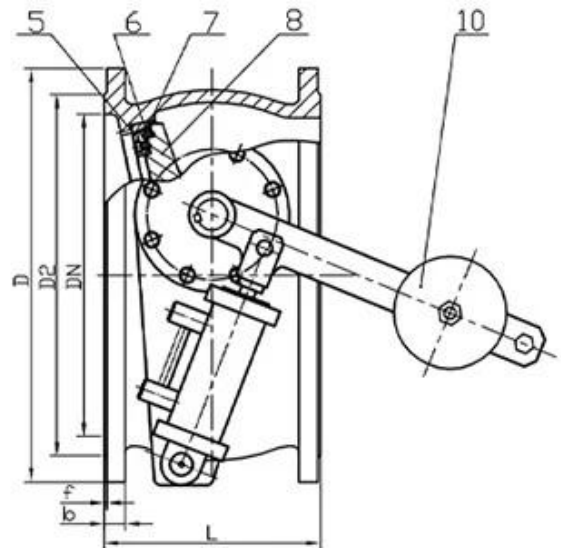


PRODUCT STRUCTURE

Features

- Size range DN100-1200mm
- Standard-ISO/ BS/DIN /AWWA/API
- Tests standard-BS EN 12266-1
- Body-Ductile Iron/Cast Iron/Stainless Steel/WCB
- Body Ring-SS420/SS304/SS316
- Disc Ring-EPDM
- Shaft-420/S5431/SS316
- Fusion bonded epoxy coating- Min 300 Microns

This series tilting check valves are suitable to be used at the exit of the pump whose medium is water. It is used to prevent or reduce medium back from water hammer. So it can protect the pipeline system. Suitable temperature $\leq 80^{\circ}\text{C}$

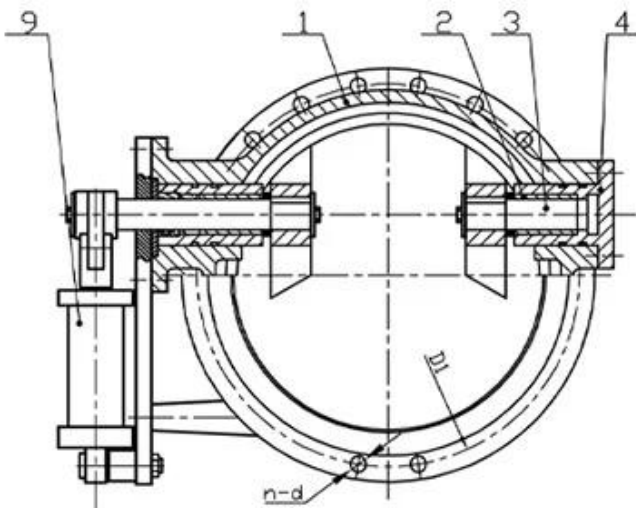

APPLICATION SCENARIO



Industrial water application



Power plant



Sea water desalination



Water treatment



Water supply and drainage



HAVC



Food and drug



Water transport



COMPANY FACTORY



COMPANY INFORMATION



I 廠址: 廣東省 肇慶市, 肇慶市 肇慶縣 肇慶鎮.

II 廠 CNC 機房 廠, 廠 廠房 廠, 廠房 廠 廠, 廠 廠 廠 廠 廠.

III 廠房 廠 廠 廠, 廠 廠 廠 廠 廠 廠 廠 廠.

VI 廠 廠房 廠房 廠房 廠房 廠房 廠房.

V 廠 廠: GB, 廠 廠, 廠 廠, TUV CE, ISO 9001, ADWO-2000, TS, PED, WRC WRAS, KTW, API 6D, API609.

VI 廠 廠: 廠房 廠, 廠 廠, 廠房 廠, 廠 廠, 廠房 廠, 廠房 廠, 廠/廠/廠 廠房 廠, 廠 廠.

01

21 years of professional experience

03

Independent research and development team
28 top senior professional researchers

05

100% high level ex-factory inspection

07

2 years quality assurance, repair and replacement

4 factories

02

2 professional testing centers

04

High quality imported materials

06

COMPANY QUALIFICATION




COMPANY EXHIBITION



Partners





□□: □□" □□, □□, □□, □□, □□ □□□.

00: 000, 000, 000, 00000 00. RKSfluid 000000 00 000 000000. 000 00 000 000000.

□□: RKSfluid □□□ □□□ □□ □□□ □□□ □ □□ 4□□ □□□ □□□□.

問： どの 範囲 どの 年 2~5 年 間 間隔. どの 範囲 どの 年 間.

A: $\frac{1}{2} \times \frac{1}{2} \times \frac{1}{2} = \frac{1}{8}$ pc.

□□□ DIN, ASME, BS EN, JIS, API, AWWA □□□□□.

Q: □□□□ □□□ □□□ □□□□ □□□ □ □□□?

A: RKSfluid 20mm 鋼管 鋼管 鋼管 70mm 鋼管 R&D 鋼管 鋼管 鋼管, 鋼管 鋼管 鋼管 鋼管 鋼管.