

RKSfluid®

A key Valve in Flow Control

Butterfly Valve Ball Valve Gate Valve Globe Valve Check Valve Pipe Fittings



- Wear-resistant, adapt to different working conditions
- Acid and alkali resistance, high porosity, good gas permeability, high dust collection efficiency



- Not easy to deform, high tensile strength
- Strengthen the outer lining seam, set value filtration, better stability
- Suitable for high viscosity materials and hard particle impurity filtration

- Rigorous structure, heat-treated material surface no depilation
- Hot melt seamless, no side leakage, no chemical release
- Use medium and low viscosity fluids, high flow rate intercept solid and soft particles



- Multi-layer structure, filtration efficiency is higher than 95%
- Deep structure gradient filtration, increase the filtration area and pollution capacity
- Hydrophobic and lipophilic, ensuring oil absorption speed and oil absorption

- Lipophilic and hydrophobic
- A sufficient pollution capacity, higher filtration accuracy
- Good sealing performance



- Not easy to deform, high tensile strength
- Suitable for frequent replacement, soft and hard particles, sufficient pollution capacity
- Adapt to any standard or customized non-standard filter

- Zero leakage, zero sources of pollution
- Suitable for frequent replacement, soft and hard particles, sufficient pollution capacity
- Good chemical compatibility, integrated filter bag handle, easy to replace





- Adapt to different working conditions
- Suitable for temperatures below 125°C, better resistance to organic solvents, oxidants, inorganic and organic acids

- High temperature resistance, high strength, acid and alkali corrosion resistance, wear resistance, folding resistance, easy cleaning, water and oil proof, anti-static
- Adapts to different temperature zones
- Low price and wide application




- Significant temperature resistance
- Good chemical resistance, adapt to different working conditions
- Low backflush pressure, high elastic de-filtering efficiency

- Withstand high temperature, suitable for high temperature of flue gas
- Suitable for collection by electric dust collector



- High strength, chemical resistance
- Suitable for harsh environments, adapts to different temperature zones

- Good heat resistance, good dust stripping, reduced energy consumption
- Anti-corrosion, better acid and alkali resistance
- No water absorption, no moisture absorption
- High filtration efficiency

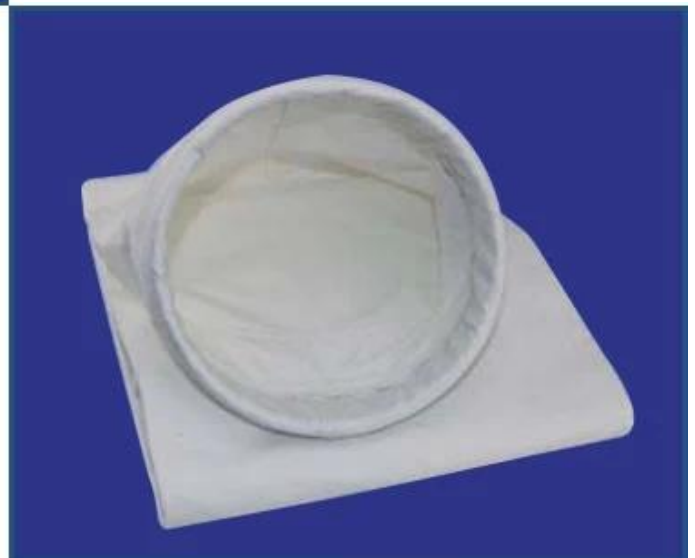



- Chemical resistant, filter bag chemically stable, not burn-in
- Dust removal efficiency is up to 99.99%
- Low pressure loss and low cost of consumables
- Suitable for flue gas purification, dust removal, dust control and material recovery

Our Factory



Company Advantages



1. 21 years of professional experience, PP, PE, PVC, HDPE, LLDPE, 2000mm diameter, 1000mm diameter, 500mm diameter, 300mm diameter, 150mm diameter, 75mm diameter.
2. Independent R & D team of 28 senior researchers, 10 R & D centers.
3. API, AWWA, ASME, BS EN, DIN, JIS, TUV, CE, ISO9001, TS, OHSAS, WRAS.
4. 2 years quality assurance, repair and replacement.

Exhibition Photos



Our Certificates





Tel: 024 2318 0188-899

Email/Skype: ivory@rksfluid.com

Mobile/WhatsApp/Wechat: +86 15140071761

Add: Pump & Valve Industrial Park, No. 5 Panwu Road,
Liaozhong Dist. Shenyang, Liaoning P.R. China

□□□□ □□

Q1 : □□□ □□□ □□□ □□?

A1 : □□ □□□□ □□, □□, □□□□ □□□□□□.

Q2 : □□ □□?

A2 : □□□ □□ 5-10 □, □□□ □□ 15-90 □ □□ □□□.

Q3 : □□ □□?

A3 : T / T 30 % □□, □□ □□ □□ □□ □ □□. □□ □□□□□□.

Q4 : □□□ MOQ? □□ □□□ □ □ □□□□?

A4 : 100% 100%, 100% 100%. 100% 100%.

Q5 : 100% 100% 100% 100% 100%?

A5 : 100%, 100% 100%. 100% 100% 100% 100% 100%.

Q6 : 100% 100% 100% 100% 100% 100% 100%?

A6 : 100%, 100% 100%, 100% 100% 100% 100%, 100% 100%

Q7 : 100% 100% 100% 100%?

A7 : 100% 100%. 100% 100% 100%, 100% 100% 100%.