

RKSfluid®



RKSfluid®



RKSfluid®



RKSfluid®



DESIGN FEATURES

DURABLE

- No-pin connection, 1 pc blow-out proof stem
- DI/CI Nodularity over 95%


ANTI-CORROSION

- Material: Epoxy powder:  , Earth Best!
- Coating Thickness: 200-250μm
- Spraying temp: over 200°C. Doesn't fade, even wipe with diethyl ether

QUALITY STANDARD

- 100% quality test, follow DIN, ASTM, JIS, GB/T, ISO, BS EN, API
- ONLY ONE Manufacturer get CE certification up to DN1800
- 2 years warranty. 15000 times On-off test, 30000 times Destructive experiment



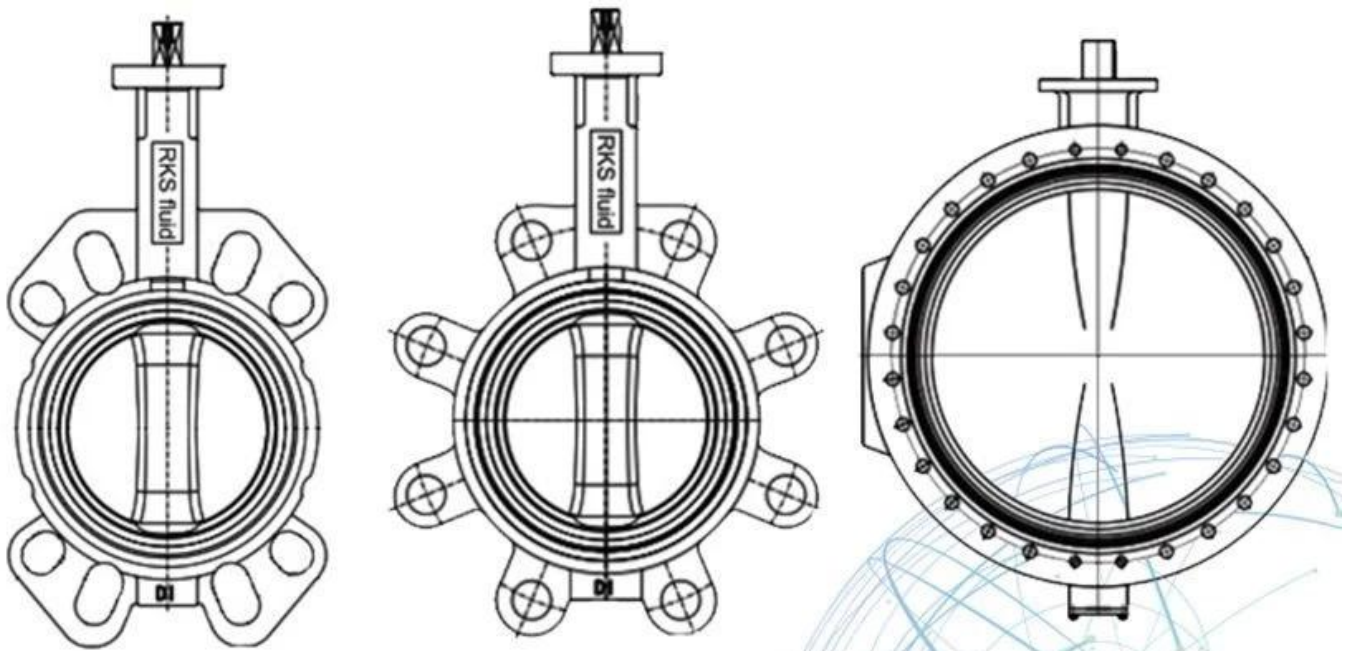

APPLICATION SCENARIO



Industrial water
application



Power plant



Sea water
desalination



Water treatment



Water supply
and drainage



HAVC



Food and drug



Water transport



RKSfluid 1997 年 開始營業。 主要 業務
 為 水、 海 水 及 工業 用水 之 供應。 並
 承接 各種 水、 海 水 及 工業 用水 之 工程

Our Factory



Our Certificates





Resilient seat butterfly valve

PN10/PN16, ANSI 125LB/150LB,5K/10K

Size:DN25-DN2400

Body:DI CI

Disc: Stainless steel

Seat :EPDM, NBR, Viton

Connection: Wafer, Lug, Flange



Resilient seat butterfly valve

PN10/PN16, ANSI 125LB/150LB,5K/10K

Size:DN25-DN2400

Body:DI CI

Disc: DI+ Nylon

Seat :EPDM, NBR, Viton

Connection: Wafer, Lug, Flange



Resilient seat butterfly valve

PN10/PN16, ANSI 125LB/150LB,5K/10K

Size:DN25-DN2400

Body:DI CI

Disc: Stainless steel

Seat :EPDM, NBR, Viton

Connection: Wafer, Lug, Flange



Resilient seat butterfly valve

PN10/PN16, ANSI 125LB/150LB,5K/10K

Size:DN25-DN2400

Body:DI CI

Disc: Stainless steel

Seat :EPDM, NBR, Viton

Connection: Wafer, Lug, Flange



Double flange resilient seat butterfly valve

PN10/PN16, ANSI 125LB/150LB, 5K/10K

Size:DN50-DN1000

Body:DI CI

Disc: Stainless steel

Seat :EPDM, NBR, Viton

Connection: Flange



Short-neck butterfly valve for petroleum

ANSI 125LB/150LB

Top Flange Standard:ISO5211

Size:2"-12"

Body: DI CI

Disc :Stainless Steel

Seat : EPDM, NBR, Viton

Connection:Wafer, Lug

Q: 貴社は 何社

A: 貴社 貴社 貴社 貴社 貴社 貴社 貴社?

A: 貴社 貴社, 貴社, 貴社, 貴社, 貴社 貴社.

Q: 貴社 貴社 貴社 貴社 貴社 貴社?

A: 貴社, 貴社, 貴社, 貴社 貴社. RKSfluid 貴社 貴社 貴社 貴社. 貴社 貴社 貴社, 貴社 貴社 貴社.

Q: 貴社 貴社 貴社 貴社?

A: RKSfluid 貴社 貴社 貴社 貴社 貴社 4 貴社 貴社 貴社.

Q: 貴社 貴社 貴社

: 貴社 貴社 貴社 2 ~ 5 貴社. 貴社 貴社 貴社 貴社.

Q: MOQ

: 1 貴社 貴社 貴社.

Q: 貴社 貴社 貴社?

: 100 % 貴社 貴社 貴社 2 貴社. 貴社 貴社 貴社 貴社 貴社.

貴社 TUV, API, WRAS, CE, ISO 貴社 貴社 貴社.

貴社 DIN, ASME, BS EN, JIS, API, AWWA 貴社 貴社 貴社.

Q: 貴社 貴社 貴社 貴社 貴社 貴社 貴社?

A: RKSfluid 20 貴社 貴社 貴社 貴社 70 貴社 貴社 R & D 貴社 貴社 貴社, 貴社 貴社 貴社 貴社 貴社 貴社.