





- Streamlined, minimum noise
- Backflow velocity only 0.2s, Head loss 0.1bar with 2m/s
- EPDM/NBR Rubber fully coated disc
- Anti-erosion design. Self-adjusting ball
- Self-cleaning stem, Long time smooth operation

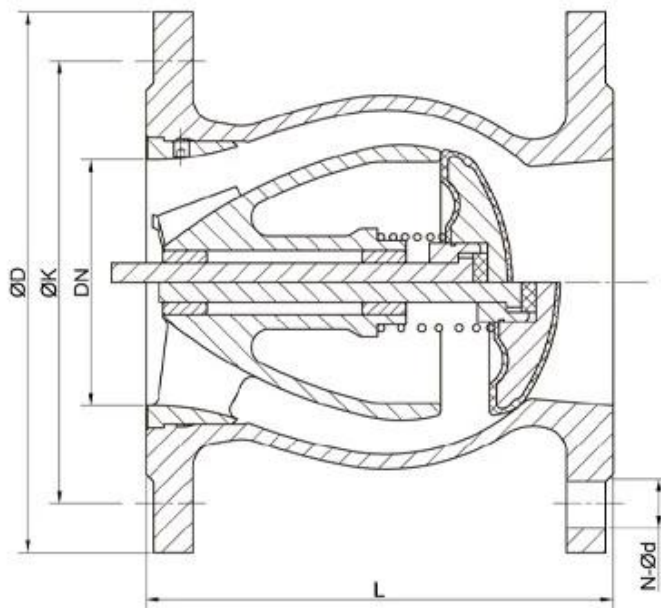

NPS2-NPS14 (DN50-DN350)

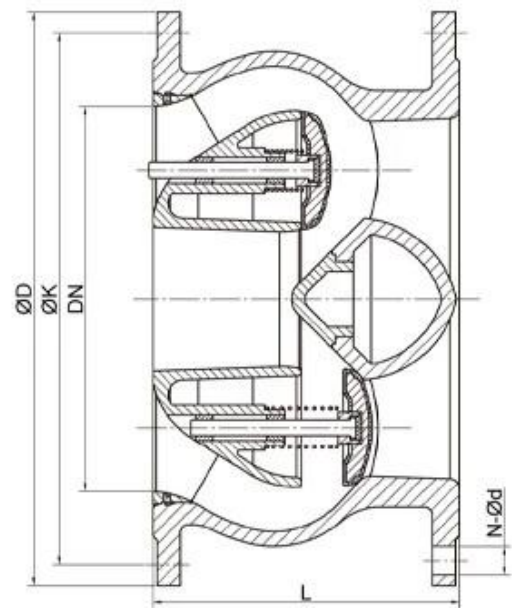

NPS16-NPS24 (DN400-DN600)



APPLICATION SCENARIO



Industrial water application



Power plant



Sea water desalination



Water treatment



Water supply and drainage



HAVC



Food and drug



Water transport



COMPANY FACTORY



COMPANY INFORMATION



i 0000 00 : 00 00 00, 00 0 00 00 00.

CNC 00 00, 00 00 0, 0000 00 00, 00 00 00 0 00.

0 00 00 00 000 0000 000000 000 00 00 00.

000 0000 000 0000 00 00 000 000000.

v 00 00 : GB, 00 00, 00 00, TUV CE, ISO 9001, ADWO-2000, TS, PED, WRC WRA, KTW, API 6D, API609.

VI 00 0000 : 00 00, 0 00, 000 00, 00 00, 000 00, 000 00, 00 / 00 / 00 00000, 00 00.

01

21 years of professional
experience

03

Independent research and
development team
28 top senior professional
researchers

05

100% high level ex-factory
inspection

07

2 years quality assurance,
repair and replacement

4 factories

02

2 professional testing
centers

04

High quality imported
materials

06

COMPANY QUALIFICATION



COMPANY EXHIBITION



Partners



□□□□ □□

Q : □□□ □□□ □□ □□ □□□□□□?

A : □□□ □□, □□, □□, □□, □□ □□□.

Q : □□□□□□ □□ □ □ □□□□?

A : □□, □□, hrdraulic, □□□□□ □□.RKSfluid □□□□□□ □□ □□□ □□□□□□.□□□ □□□ □□ □□ □□□□ □ □□□□.

Q : □□ □□□ □□□□□?

A : RKSfluid□□ □□□ □□□ □□ □ □□□ 4 □□ □□□ □□□□.

Q : 鋼 鋼 鋼

A : 鋼 鋼 2 ~ 5 鋼鋼 鋼鋼 鋼鋼.鋼鋼 鋼鋼 鋼 鋼鋼 鋼.

Q : MOQ

A : 鋼 鋼鋼 鋼 1pc.

Q : 鋼 鋼鋼 鋼鋼鋼?

A : 鋼 鋼 100% 鋼 鋼鋼, 2 鋼 鋼.鋼鋼鋼 鋼鋼鋼 鋼鋼鋼鋼.

TUV, API, WRA, CE, ISO 鋼鋼 鋼鋼鋼.

鋼鋼 DIN, ASME, BS EN, JIS, API, AWWA 鋼鋼鋼.

Q : 鋼鋼鋼 鋼鋼 鋼鋼鋼 鋼鋼 鋼 鋼 鋼鋼鋼?

A : RKSfluid 鋼鋼 20 鋼 鋼鋼 70 鋼 鋼鋼 R & D 鋼鋼鋼鋼 鋼 鋼, 鋼 鋼 鋼 鋼 鋼鋼 鋼鋼鋼.