


Size	DN40-DN1200
Working Medium	Water
Temperature	0°C~70°C
Material	Ductile Iron/Stainless Steel/Cast Steel/Bronze/Aluminum Alloy
Design Standards	CJ/T 219 & JB/T 10674 & EN 1074-5
Pressure Level	PN10, PN16, PN25
Stress Test Standard	GB/T 13927 & ISO 5208 & EN12266-1
Flange drilling standard	GB17241.6; EN1092-2; ISO7005-2; ANSI / JIS / AS2129
Structure Length	GB 12221 & EN558-1



745x 00 00 0000 00 00 0000 00 0000 0000 0000 0000 00 0 0000 00 0000 / 0000 0 0000 0000 00000 000000. 0000 0000 00 000000 0000000 00 0000 00 000000 0000 0000 000000 00 0000 00 00 0000 0000 0 00000. 0000 0000 0000000 0000 000000 0000 00 0, 00 0000 00 00 00 000000 00 0 0000 00 00000. 00 00 0000 0 0000 00000. 00 0000 00. 00 00 0000 00 00 00 0 0000 0000 0 00000.

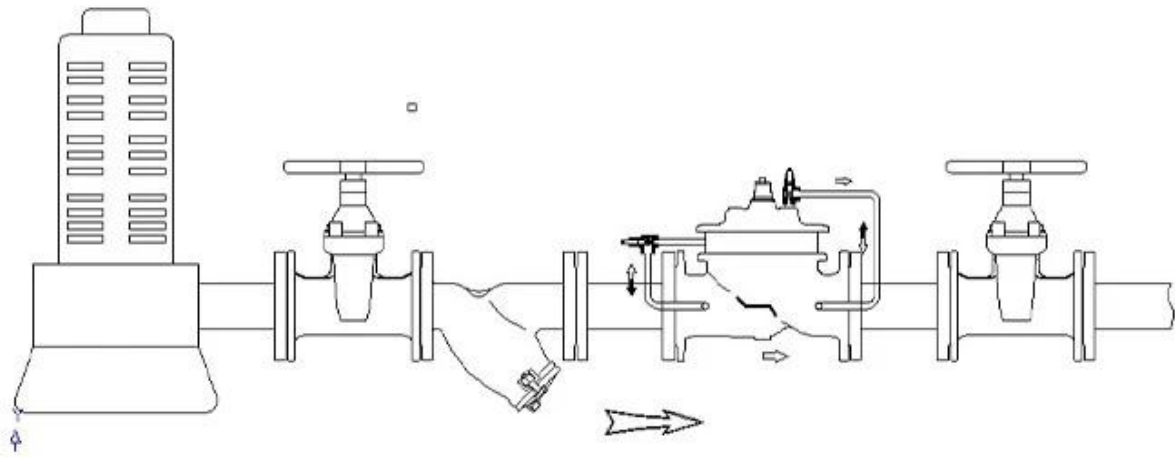

Exhibition Photos



Our Certificates



□□□□ □□

Q : □□□□ □□□□ □□ □□ □□□□□?
A : □□□ □□, □□, □□, □□, □□ □□□.

Q : □□□□□□ □□ □ □ □□□□?
A : □□□, □□, □□, □□□□□ □□. RKSfluid □□□□□□ □□ □□□ □□□□□□. □□□ □□□□□, □□ □□□□□□□.

Q : □□□ □□ □□□ □□□□□?
A : RKSfluid□□ □□□ □□□ □□ □ □□□ 4 □□ □□□ □□□□□.

Q : □□ □□ □□
A : □□□□ □□□ 2 ~ 5 □ (2 ~ 5 □)□ □□□□□. □□□□ □□□ □□ □□□ □□ □ □□.

Q : **MOQ.**
A : □□ □□□ □□ 1pc.

Q : □□ □□□ □□□□□?
A : □□ □□ 100 % □□ □□□, 2 □ □□. □□□□ □□□□ □□□□□.
 □□□ TUV, API, WRAS, CE, ISO □□□ □□□□□□□.
 □□, DIN, ASME, BS EN, JIS, API, AWWA.

Q : 2019 2020 2021 22 23 2022?

A : RKSfluid 20 2020 70 2021 R & D 2022 2023, 2024 2025 2026 2027.