



# RKSfluid®

A key Valve in Flow Control



Butterfly Valve



Ball Valve



Gate Valve



Globe Valve



Check Valve



Pipe Fittings

## Product Description



Super Anti-corrosion  
Epoxy powder coating **200-250µm**,  
baking varnish over **200°C**,  
use  material.



Free wedge nut, **reduces the stem bending forces** and at the same time enables it to be easily replaced.



The more compact new cap, reduces the water retention areas in order to **reduce the risk of bacterial growth**.



One piece stainless steel stem in for **better resistance to axial load and to with stand higher operating torques**.



**Three locking tab** for bayonet system prevents self-dismantling.



Dust guard integrating three O-ring shape, **prohibiting the introduction of foreign bodies** at the stem.



**Male guiding system with composite sliding skate** reduces the wear of the wedge against the body, allowing a smooth functionality and a longer life time of the valve.



**Triple seal at the operating stem** to ensure tightness with the test of time (2500 cycles).



**New male composite sliding skate technology** ensuring a low operating torque even under high differential pressure and preventing damage or corrosion generated by the friction.



# Our Factory



I 鋼 鋼 : 鋼 鋼 鋼, 鋼 鋼 鋼 鋼 鋼.

鋼, 鋼 鋼 鋼 鋼, 鋼 鋼 鋼 鋼 鋼, 鋼 鋼 鋼 鋼 鋼 鋼 II 鋼 CNC.

III 鋼 鋼 鋼 鋼 鋼, 鋼 鋼 鋼 鋼 鋼 鋼 鋼 鋼 鋼.

IV 鋼 鋼 鋼, 鋼 鋼, 鋼 鋼 鋼 鋼 鋼 鋼 鋼 鋼.

V 鋼 鋼 : GB, 鋼 鋼 鋼, 鋼 鋼, TUV CE, ISO 9001, ADWO-2000, TS, PED, WRC WRAS, KTW, API 6D, API609.

VI 鋼 鋼 : 鋼 鋼 鋼 鋼, 鋼 鋼, 鋼 鋼 鋼, 鋼 鋼, 鋼 鋼 鋼, 鋼 鋼 鋼 鋼 / 鋼 / 鋼 鋼 鋼 鋼, 鋼 鋼.




## Four factories



## Why choose us



- 2 professional testing centers
- 28 senior professional researchers
- Independent research and development team

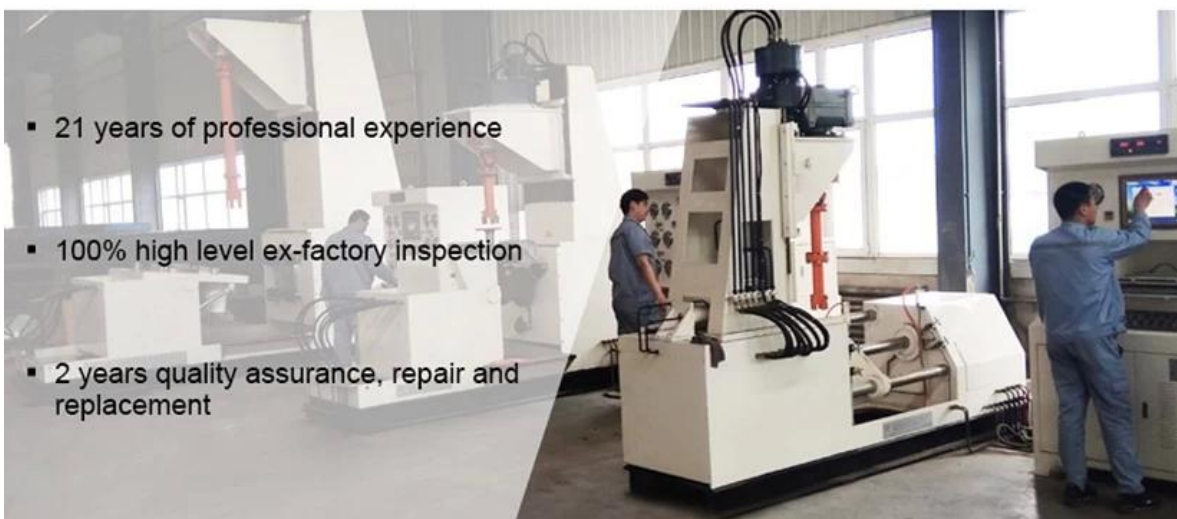

- 21 years of professional experience
- 100% high level ex-factory inspection
- 2 years quality assurance, repair and replacement



## Exhibition Photos



## Our Certificates



□□□□ □□

Q : □□ □□□□□□ □□, □□ □□ □□ □□□□?

A : □□ '□□, □□, □□, □□, Application □□□.

Q : □□□ □□□□□□ □□ □ □ □□□□, □□□ □□□?

