


# RKSfluid®

Proven Technology-Superior Features-Legendary Value



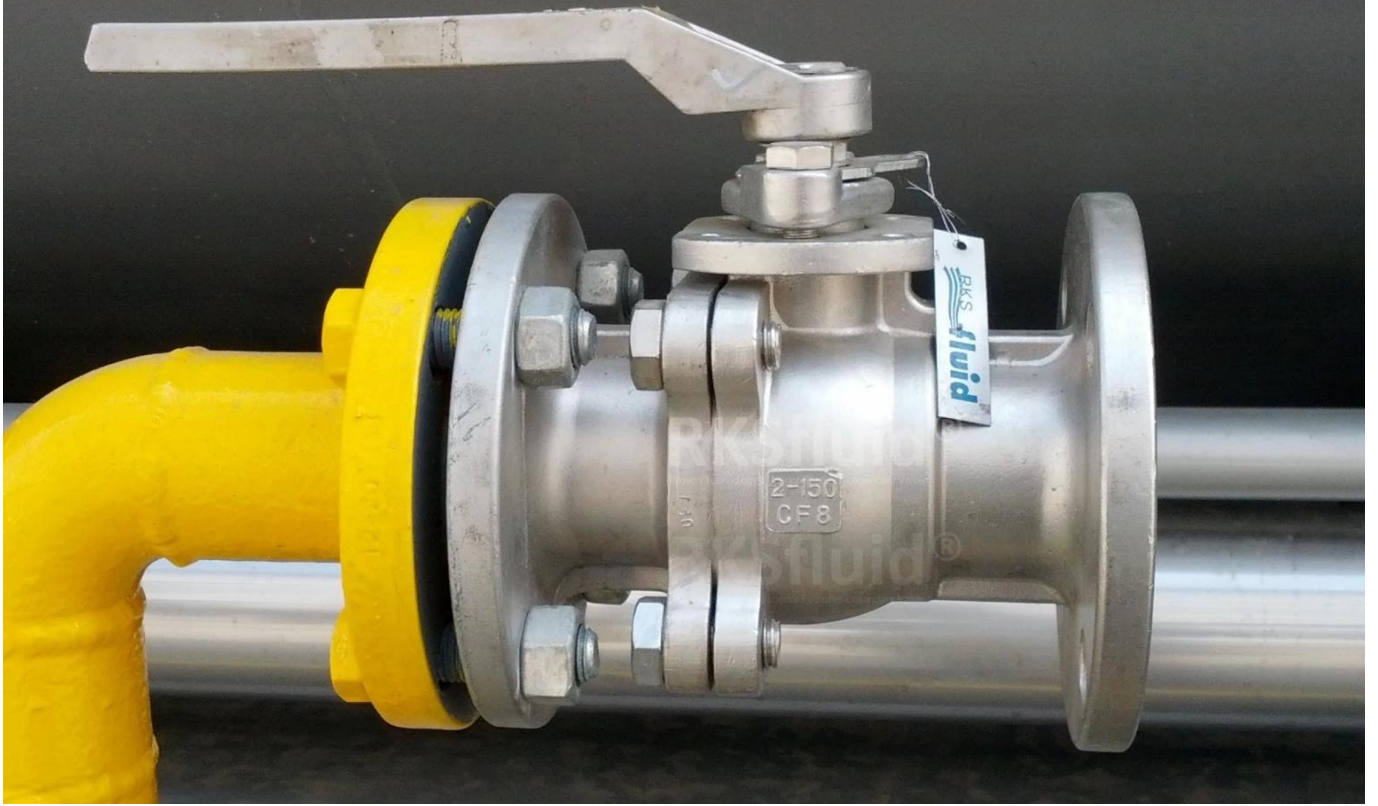

工作温度 : -20°C ~ + 180°C  
材料 : WCB / CF8 / CF8M / CF3 / CF3M  
密封材料 : 石墨 / 四氟 / 铜 / 不锈钢  
规格 : 150LB-600LB  
口径 : 1/2" ~ 12"(DN15-DN300)



## Partners



PTFE lined butterfly valve



Resilient seat butterfly valve



Double offset butterfly valve



Triple offset butterfly valve



Ball valve



Pipe fittings

# Our Factory



## Company Advantages

01

21 years of professional experience

03

Independent research and development team  
28 top senior professional researchers

05

100% high level ex-factory inspection

07

2 years quality assurance, repair and replacement

4 factories

02

2 professional testing centers

04

High quality imported materials

06



# Our Certificates



□□□□ □□

Q : □□□ □□□ □□ □□ □□□□□□?

A : □□ □□, □□, □□, □□, □□ □□□.

Q : □□□□□□ □□ □ □ □□□□? □ □□?

A : □□, □□, □□, □□□□□ □□. RKSfluid □□□□□□ □□ □□□ □□□□□□. □□□ □□ □□□□□□□□.

Q : □□□ □□ □□□ □□□□□□?

A : RKSfluid□□ □□□ □□□ □□ □ □□□ 4 □□ □□□ □□□□□.

Q : □□ □□ □□

A : □□ □□□ □□□ □□□ 2 ~ 5 □□ □□□□□□. □□□ □□ □□□

Q : MOQ

A : □□ □□□ 1pc□□□□.

Q : □□□ □□ □□□?

: 100 % □□ □□ □□, 2 □ □□. □□□□ □□□□ □□□□ □□□ □□□□□□□□.

□□□ TÜV, API, WRAS, CE, ISO □□□ □□□□□□□□.

□□□ DIN, ASME, BS EN, JIS, API, AWWA□ □□□□□□.

