


NPS2-NPS14 (DN50-DN350)

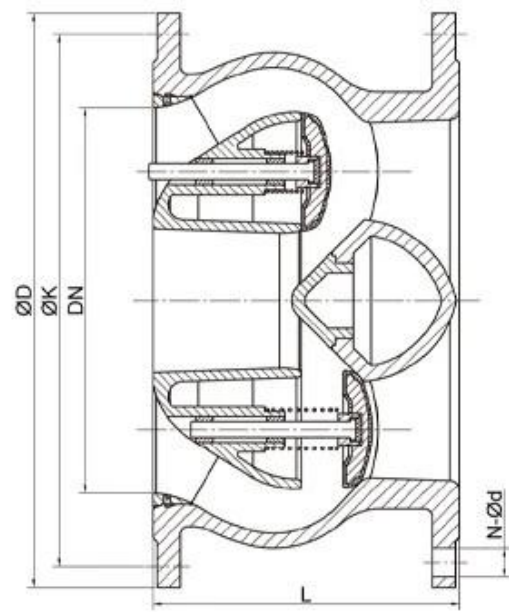

NPS16-NPS24 (DN400-DN600)

范围	DN50 - DN600(NPS2-NPS24)
公称压力	PN10, PN16, PN25, 125, 150
使用温度	0°C~80°C
适用介质	水、空气、油、浆料
执行标准	GB/T 12235-2007
材料标准	EN 558-1
密封材料	EN 1092-2

COMPANY FACTORY

