



# RK fluid®

A key Valve in Flow Control



## DESIGN FEATURES

### HIGHLY CUSTOMIZABLE

- According to **customer requirements**

### OPTIMAL SEALING

- AWWA-C219 **absolutely leakproof**
- Internal ebonite rubber lining

### CLASSIC & STURDY DESIGN

- Longitudinal adjustment of **+/- 25mm**
- **Super large** Dia & Even pressures up to **100 bar**
- **Cost-effective**, alternative for duplex stainless steel on desalination application

### APPLICATION

- Perfect solution for all standard and non-standard applications in challenging famous projects worldwide
- Desalination, water pipes and **various application**

### DURABLE


- ANTI-CORROSION
- Thickness: **Epoxy powder** coating of **150-200µm**
- Temperature : Spraying temperature over **200 °C**. Doesn't fade, even wipe with **diethyl ether**

### MATERIAL

- Epoxy powder:  , Earth Best!
- WRAS, KTW-W270, ACS approved materials
- Cast iron: nodularity over **95%**!
- Bolts, nuts & washers: Hot Dip Galvanized or Stainless Steel **AISI316-A4**





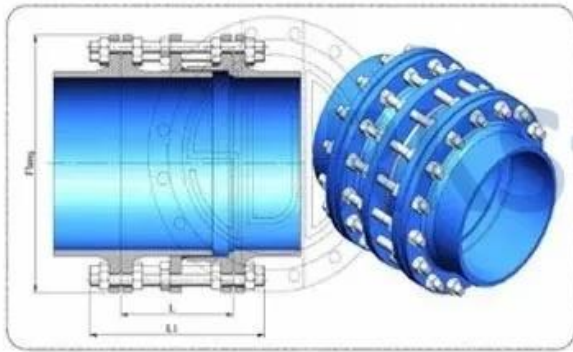

## APPLICATION SCENARIO



Industrial water application



Hydroelectric generation



Sewage treatment



Water treatment



Water supply and drainage



Water transport



Pipe network in house



Irrigation





# Our Factory



## Company Advantages

01

21 years of professional experience

03

Independent research and development team  
28 top senior professional researchers

05

100% high level ex-factory inspection

07

2 years quality assurance, repair and replacement

4 factories

02

2 professional testing centers

04

High quality imported materials

06





I 工厂 : 工厂 工厂, 工厂 工厂 工厂.

II 工厂 CNC 工厂 工厂, 工厂 工厂, 工厂 工厂, 工厂 工厂 工厂 工厂.

III 工厂 工厂 工厂, 工厂 工厂 工厂 工厂 工厂.

IV 工厂 工厂 工厂 工厂 工厂 工厂 工厂.

V 工厂 工厂 : GB, 工厂 工厂, 工厂 工厂, TUV CE, ISO 9001, ADWO-2000, TS, PED, WRC WRAS, KTW, API 6D, API609.

VI 工厂 工厂 : 工厂 工厂, 工厂 工厂, 工厂 工厂, 工厂 工厂 工厂, 工厂 工厂, 工厂 工厂, 工厂 / 工厂 / 工厂 工厂, 工厂 工厂.

## Exhibition Photos



# Our Certificates



□□□□ □□

Q : □□□ □□□ □□ □□ □□□□□□?

A : □□ □□, □□, □□, □□, □□ □□□.

Q : □□□□□□ □□□ □ □□□□?

A : □□, □□, □□ □□□□□ □□. RKSfluid □□□□□□ □□ □□□ □□□□□□. □□□ □□ □□□□□□.

Q : □□□ □□ □□□ □□□□□?

A : RKSfluid□□ □□□ □□□ □□□ □□□ 4 □□ □□□ □□□□□.

Q : □□ □□ □□

A : □□ □□□ □□□ □□ 2 ~ 5 □ □□ □□ □□□□□□. □□□ □□□ □□ □□□□□□□□.

Q : MOQ

A : □□ □□□ □□ 1 PC.

Q : □□ □□□ □□□□□□?

A : □□□ □□ 100 % □□ □□□, □□ 2 □. □□□□ □□ □□□ □□□□□□.

□□□ TUV, API, WRAS, CE, ISO □□□ □□□□□□□□.

DIN, ASME, BS EN, JIS, API, AWWA □ □□□□ □□.

Q : □□□□ □□□ □□□□ □□□ □□ □ □ □□□□?

A : RKSfluid□ 20 □□ □□□ □□□□ □□□ 70 □ □□□ R & D □□□□□ □□ □□, □□ □□ □ □□ □□□□ □□□□□□.