




# RKSfluid®

A key Valve in Flow Control



Butterfly Valve



Ball Valve




Gate Valve



Globe Valve



Check Valve



Pipe Fittings

## DESIGN FEATURES


### DURABLE

- **1 piece** non-welded **PFA** molded **DSS** Disc stem
- **Precision casting** WCB/CF8M Bodies

### TRIPLE SEAL



- **Triple Seal:** Spring loaded Mechanical seal, Radial Lip Seal, FPM
- China **ONLY ONE** Manufacturer **400Mpa Isostatic pressing** PTFE seat, **consistent density**

### ANTI-CORROSION

- **Material:** Epoxy powder:  , Earth Best!
- Coating Thickness: **200-250μm**
- Spraying temp: over **200°C**. Doesn't fade, even wipe with diethyl ether

### QUALITY STANDARD

- **100% quality test**, follow DIN, ASTM, JIS, GB/T, ISO, BS EN, API
- **ONLY ONE** Manufacturer get **CE** certification up to **DN1800**
- **2 years** warranty. **15000** times On-off test, **30000** times Destructive experiment

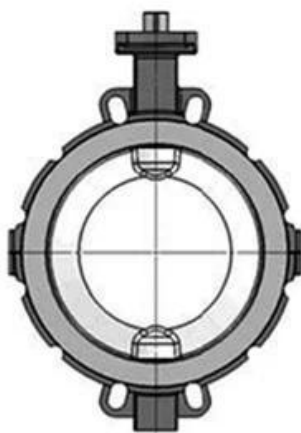

# APPLICATION SCENARIO



Industrial water application



Nuclear plant



Petroleum



Steel



Wastewater treatment



Acid-base



Food



Irrigation



# Our Factory



## Company Advantages

01

21 years of professional experience

03

Independent research and development team  
28 top senior professional researchers

05

100% high level ex-factory inspection

07

2 years quality assurance, repair and replacement

4 factories

02

2 professional testing centers

04

High quality imported materials

06



I 工厂 : 工厂 , 工厂 工厂 工厂 .

II 工厂 CNC 工厂 工厂, 工厂 工厂, 工厂 工厂 工厂 工厂 .

III 工厂 工厂 工厂 工厂, 工厂 工厂 工厂 工厂 工厂 .

IV 工厂 工厂 工厂 工厂 工厂 工厂 工厂 .

V 工厂 : GB, 工厂 工厂, 工厂 工厂, TUV CE, ISO 9001, ADWO-2000, TS, PED, WRC WRAS, KTW, API 6D, API609.

VI 工厂 : 工厂 工厂 工厂, 工厂 工厂, 工厂 工厂, 工厂 工厂, 工厂 工厂, 工厂 工厂, 工厂 / 工厂 / 工厂 工厂, 工厂 工厂 .

## Exhibition Photos



## Our Certificates



□□□□ □□

Q : □□□ □□□□ □□ □□□ □□□□□?

A : □□□ □□, □□, □□, □□, Application System.

Q : 閥の仕様を教えてください。

A : 材質、口径、圧力、接続形式など。RKSfluidの標準仕様を参考にしてください。詳細はお問い合わせください。

Q : どの程度の寿命がありますか？

A : RKSfluidの標準仕様は、4年程度の寿命があります。

Q : どの程度の流量がありますか？

A : 口径2 ~ 5インチの標準仕様は、流量は約1000L/minです。

Q : MOQはありますか？

A : 標準仕様は1pcから可能です。

Q : どの程度の圧力がありますか？

A : 標準仕様は100%の圧力があり、2インチの口径は約10MPaです。

またTUV, API, WRAS, CE, ISOなどの認証があります。

またDIN, ASME, BS EN, JIS, API, AWWAなどの規格があります。

Q : どの程度のサイズがありますか？

A : RKSfluidの標準仕様は、口径20mmから70mmの範囲でR & Dの対応が可能です。