



RKSfluid®

A key Valve in Flow Control



Butterfly Valve



Ball Valve



Gate Valve



Globe Valve



Check Valve



Pipe Fittings

Product Description



Super Anti-corrosion
Epoxy powder coating **200-250µm**,
baking varnish over **200°C**,
use  material.



Free wedge nut, **reduces the stem bending forces** and at the same time enables it to be easily replaced.



The more compact new cap, reduces the water retention areas in order to **reduce the risk of bacterial growth**.



One piece stainless steel stem in for **better resistance to axial load and to with stand higher operating torques**.



Three locking tab for bayonet system prevents self-dismantling.



Dust guard integrating three O-ring shape, **prohibiting the introduction of foreign bodies** at the stem.



Male guiding system with composite sliding skate reduces the wear of the wedge against the body, allowing a smooth functionality and a longer life time of the valve.



Triple seal at the operating stem to ensure tightness with the test of time (2500 cycles).



New male composite sliding skate technology ensuring a low operating torque even under high differential pressure and preventing damage or corrosion generated by the friction.

Engineering Projects



Product Category





□ 鋼 鋼 : 鋼 鋼 鋼, 鋼 鋼 鋼 鋼.

□ 鋼 CNC 鋼 鋼, 鋼 鋼, 鋼 鋼 鋼 鋼, 鋼 鋼 鋼 鋼.

▣ 鋼 鋼 鋼 鋼 鋼 鋼 鋼 鋼 鋼 鋼 鋼.

□ 鋼 鋼 鋼 鋼 (Houston) 鋼 鋼 鋼 鋼 鋼 鋼.


◆ 鋼 鋼 : GB, 鋼 鋼, 鋼 鋼, TUV CE, ISO 9001, ADWO-2000, TS, PED, WRC WRAS, KTW, API 6D, API609.

VI 鋼 鋼 : 鋼 鋼 鋼, 鋼 鋼, 鋼 鋼 鋼, 鋼 鋼, 鋼 鋼 鋼, 鋼 鋼 鋼, 鋼 / 鋼 / 鋼 鋼 鋼, 鋼 鋼.

Four factories



Why choose us

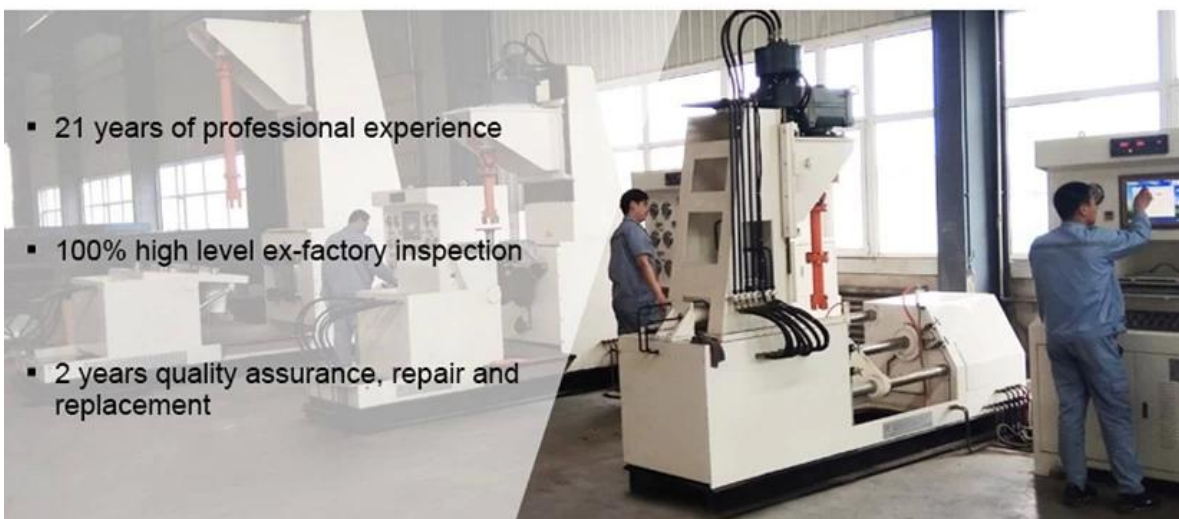

Exhibition Photos



Our Certificates



□□□□ □□

Q : □□□□ □□□□ □□ □□ □□□□?

A : □□□ □□, □□, □□, □□, □□ □□□.

Q : □□□□□□ □□ □ □ □□□□?

