




RKSfluid®

A key Valve in Flow Control

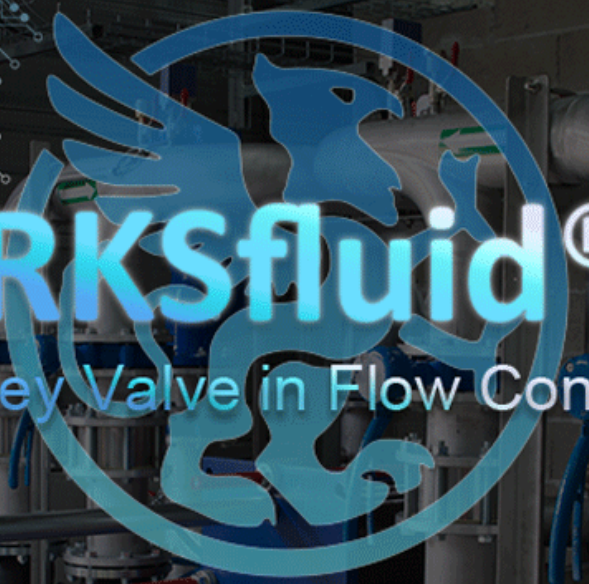

Butterfly Valve




Ball Valve



Gate Valve



Globe Valve



Check Valve



Pipe Fittings

DESIGN FEATURES

TECHNICAL REQUIREMENT :

- 1.Design standard: BS 5163.
- 2.Face to face: BS 5163.
- 3.Flanges standard: BS EN1092-2: 1997 PN16.
- 4.Test standard: BS EN12266-1 Rate B.

FEATURES :

- ◆ Double flange metal seated gate valve
- ◆ Size Range: DN50-DN2000
- ◆ Standard -ISO / BS / DIN / AWWA / API
- ◆ Tests Standard-BS EN 12266-1
- ◆ Body Ring-Bronze /SS420 /SS304 /SS316
- ◆ Disc Ring-Bronze /SS420 /SS304 /SS316
- ◆ Stem-Stainless Steel SS420 /SS431 /SS316
- ◆ Body-Ductile Iron / Cast Iron/Stainless Steel /WCB
- ◆ Disc-Ductile Iron /Cast Iron/Stainless Steel /WCB
- ◆ Fusion bonded epoxy coating-min 300 microns



RKS SMALL DIAMETER GATE VALVE
DN50 - DN300, PN10 / 16 / 25

RKS METAL SEATED GATE VALVE
DN350 - DN600, PN10 / 16 / 25

RKS LARGE DIAMETER METAL SEATED GATE VALVE
DN700 - DN2000, PN10 / 16 / 25

APPLICATION SCENARIO



Industrial water application



Power plant



Sea water desalination



Water treatment



Water supply and drainage



HVAC



Food and drug



Water transport



〇〇, 〇〇 〇〇〇 〇〇 〇 〇〇〇 〇〇. 〇〇 〇〇, 〇〇 〇〇 〇〇. 〇〇 〇 〇〇 : 〇〇 〇〇, 〇〇, 〇〇〇, 〇〇, 〇〇 〇〇, 〇〇〇〇
 〇〇 〇, 〇〇〇 〇〇〇, 〇〇 〇〇. 〇 〇〇 〇〇〇〇 〇〇, 〇〇〇 "〇〇 〇 〇〇, 〇〇〇 〇〇 〇 〇〇〇〇 〇〇〇 〇〇〇〇〇 〇〇〇 〇
 〇〇〇〇〇. "〇〇〇 〇〇 〇〇 〇〇〇〇 〇〇 〇〇〇 〇〇〇 〇〇 〇〇〇〇〇!

Our Certificates



Exhibition Photos



