



RKSfluid®

A key Valve in Flow Control

Butterfly Valve

Ball Valve

Gate Valve


Globe Valve

Check Valve

Pipe Fittings



该阀门适用于... ater 该阀门适用于 该阀门适用于 该阀门适用于
该阀门适用于 temperature $\leq 80^{\circ} \text{C}$

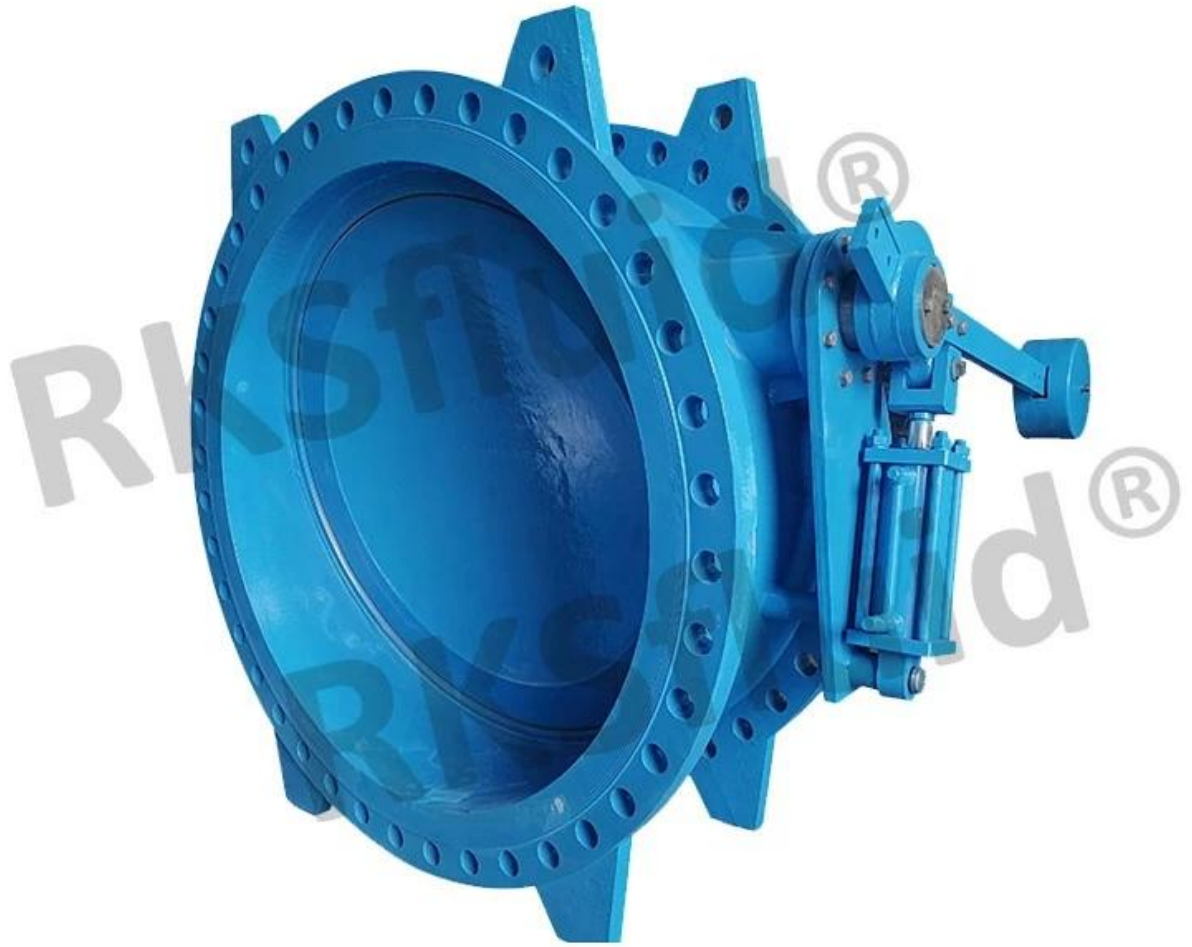

TLV TILTING CHECK VALVE (BUTTERFLY CHECK VALVE
DN100-DN1200,PN10/16/25

Features

- Double flange tilting check valve with Hydraulic damper
- Size range DN100–1200mm
- Standard–ISO/ BS/DIN /AWWA/API
- Tests standard–BS EN 12266–1
- Body–Ductile Iron/Cast Iron/Stainless Steel/WCB
- Disc–Ductile iron /Cast Iron/Stainless Steel /WCB

- Body Ring–SS420/SS304/SS316
- Retaining Ring–SS420/SS304 /SS316
- Disc Ring–EPDM
- Shaft–420/S5431/SS316
- Fusion bonded epoxy coating– Min 300 Microns

SPECIFICATION

Nominal pressure (MPa)		1.6
Testing pressure(MPa)	Seal	2.4
	Shell	1.76
Working pressure (MPa)		1.6
Suitable temperature (°c)		<80°c
Suitable medium		Water

TECHNICAL REQUIREMENT

- 1.Face to face standard: EN 558 Series 14.
- 2.Flanges standard: BS EN1092-2:1997 PN16.
- 3.Tests standard: BS EN12266-1:2003 Part 1 Rate A .

MATERIALS OF CONSTRUCTION

No.	Part Name
1	Body
2	Shaft bushes
3	Shaft
4	Cover
5	Retainer ring
6	Disc sealing ring
7	Body sealing ring
8	Disc
9	Weight

Our Factory



Company Advantages

01

21 years of professional experience

03

Independent research and development team
28 top senior professional researchers

05

100% high level ex-factory inspection

07

2 years quality assurance, repair and replacement

4 factories

02

2 professional testing centers

04

High quality imported materials

06



I 鋼 鋼 : 鋼 鋼 鋼, 鋼 鋼 鋼 鋼.

鋼, 鋼 鋼 鋼, 鋼 鋼 鋼 鋼, 鋼 鋼 鋼 鋼 鋼 鋼 II 鋼 CNC.

III 鋼 鋼 鋼 鋼, 鋼 鋼 鋼 鋼 鋼 鋼 鋼 鋼.

IV 鋼 鋼, 鋼, 鋼 鋼 鋼 鋼 鋼 鋼 鋼 鋼.

V 鋼 鋼 : GB, 鋼 鋼, 鋼 鋼, TUV CE, ISO 9001, ADWO-2000, TS, PED, WRC WRAS, KTW, API 6D, API609.

VI 鋼 鋼 : 鋼 鋼 鋼 鋼, 鋼 鋼, 鋼 鋼, 鋼 鋼, 鋼 鋼 鋼 鋼 / 鋼 / 鋼 鋼 鋼 鋼, 鋼 鋼.

Exhibition Photos



Our Certificates



□□□□ □□

Q : □□ □□□□□□ □□, □□ □□ □□ □□□□□?

A : □□ '□□, □□, □□, □□, Application □□□.

Q : □□□ □□□□□□ □□ □ □ □□□□, □□□ □□□?

A : □□, □□, Hrdraulic, □□□□□ □□. RKSfluid □□□□□□ □□ □□□ □□□□. □□□ □□□□□ □□ □□□□□□.

Q : □□□ □□ □□□ □□□□□?

A : RKSfluid□ □□□ □□□□□ □□□ □□ □ □□□ □ □□ □□□□□□.

Q : □□ □□ □□

A□ : □□ □□□ 2 ~ 5 □□ □□□ □□□. □□□ □□□ □□□ □□.

Q : MOQ

A : □□ □□□ 1 □.

Q : □□□ □□ □□□ □□□□□?

A : □□□ □□ 100 % □□ □□□, 2 □ □□. □□□ □□□ □□□ □□□□□.

□□□ TUV, API, WRAS, CE, ISO □□□ □□□.

□□□ DIN, ASME, BS EN, JIS, API, AWWA□ □□□□□.

Q : 如何 如何 如何 如何 如何 如何 如何 如何?

A : RKSfluid 如何 20 如何 70 如何 R & D 如何 如何 如何, 如何 如何 如何 如何 如何.