

DESIGN FEATURES

TECHNICAL REQUIREMENT

- 1.Design standard:BS 5163.
- 2.Face to face:BS 5163.
- 3.Flanges standard:BS EN1092-2:1997 PN16.
- 4.Test standard:BS EN12266-1 Rate B.

FEATURES

- Double flange metal seated gate valve
- Size Range:DN50-DN2000
- Standard-ISO/BS/DIN/AWWA/API
- Tests Standard-BS EN 12266-1
- Body Ring-Bronze/SS420/SS304/SS316
- Body-Ductile Iron /Cast Iron/Stainless Steel /WCB
- Fusion bonded epoxy coating-min 300 microns



RELATED PRODUCTS



SMALL DIAMETER GATE VALVE
DN50-DN300,PN10/16/25



METAL SEATED GATE VALVE
DN350-DN600,PN10/16/25



LARGE DIAMETER
METAL SEATED GATE VALVE
DN700-DN2000,PN10/16/25

APPLICATION SCENARIO



Industrial water application



Power plant



Sea water desalination



Water treatment



Water supply and drainage



HAVC





Food and drug



Water transport



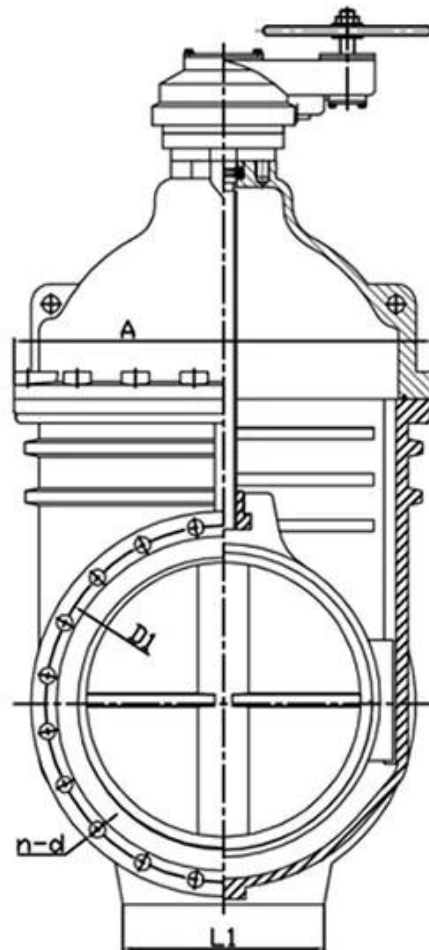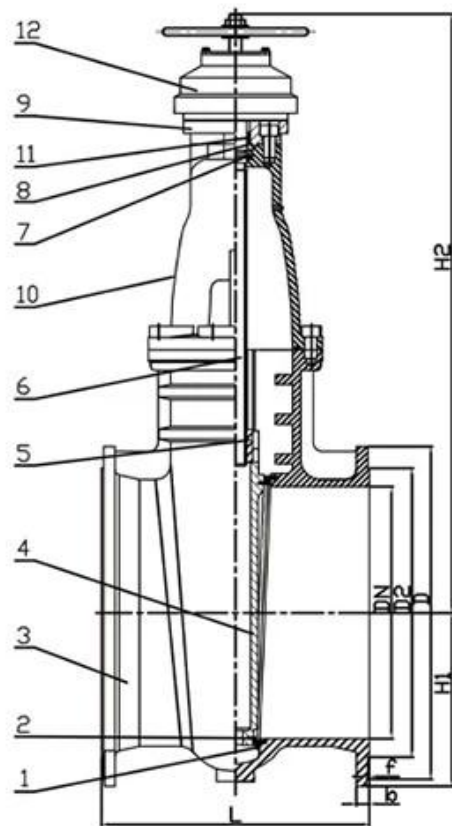

RELATED PRODUCTS



SMALL DIAMETER GATE VALVE
DN50-DN300,PN10/16/25



METAL SEATED GATE VALVE
DN350-DN600,PN10/16/25



**LARGE DIAMETER
METAL SEATED GATE VALVE**
DN700-DN2000,PN10/16/25

COMPANY INFORMATION



i 0000 00 : 00 00 00, 00 0 00 00 00.

CNC 00 00, 00 00 0, 0000 00 00, 00 00 00 0 00.

■ 00 00 00 000 000 000000 000 00 00 00.

000 0000 000 0000 00 00 000 000000.

v 00 00 : GB, 00 00, 00 00, TUV CE, ISO 9001, ADWO-2000, TS, PED, WRC WRA, KTW, API 6D, API609.

VI 00 0000 : 00 00, 0 00, 000 00, 00 00, 000 00, 000 00, 00 / 00 / 00 00000, 00 00.

01

21 years of professional
experience

03

Independent research and
development team
28 top senior professional
researchers

05

100% high level ex-factory
inspection

07

2 years quality assurance,
repair and replacement

4 factories

02

2 professional testing
centers

04

High quality imported
materials

06

COMPANY QUALIFICATION



COMPANY EXHIBITION



〇〇〇〇 〇〇

Q : 〇〇〇 〇〇〇 〇〇 〇〇 〇〇〇〇 〇〇〇〇?

A : 〇〇〇 〇〇, 〇〇, 〇〇, 〇〇, 〇〇 〇〇〇.

Q : 〇〇〇〇〇〇 〇〇 〇 〇 〇〇〇〇?

A : 〇〇, 〇〇, hydraulic, 〇〇〇〇〇 〇〇. RKSfluid 〇〇〇〇〇〇 〇〇 〇〇〇 〇〇〇〇〇. 〇〇〇 〇〇〇 〇〇 〇〇 〇〇〇〇 〇 〇〇〇〇.

Q : 〇〇 〇〇〇 〇〇〇〇〇?

A : RKSfluid 〇〇 〇〇〇 〇〇〇 〇〇 〇 〇〇〇 4 〇〇 〇〇〇 〇〇〇〇.

Q : 〇〇 〇〇 〇〇

A : 〇〇 〇〇〇 2 ~ 5 〇〇〇〇 〇〇〇 〇〇〇〇. 〇〇〇 〇〇〇 〇〇 〇〇〇 〇〇.

Q : MOQ

A : 〇〇 〇〇〇 〇〇 1pc.

Q : 〇〇 〇〇〇 〇〇〇〇〇?

A : 〇〇 〇 100% 〇〇 〇〇〇, 2 〇 〇〇. 〇〇〇〇 〇〇〇〇 〇〇〇〇〇〇.

TUV, API, WRA, CE, ISO 〇〇〇 〇〇〇〇〇.

〇〇〇 DIN, ASME, BS EN, JIS, API, AWWA 〇〇〇〇〇.

Q : 〇〇〇〇 〇〇〇 〇〇〇〇 〇〇〇 〇〇 〇 〇 〇〇〇〇?

A : RKSfluid 〇〇〇 20 〇 〇〇〇 70 〇 〇〇〇 R & D 〇〇〇〇〇 〇〇 〇〇, 〇〇 〇〇 〇 〇〇 〇〇〇 〇〇〇〇〇.