




RKSfluid®

A key Valve in Flow Control

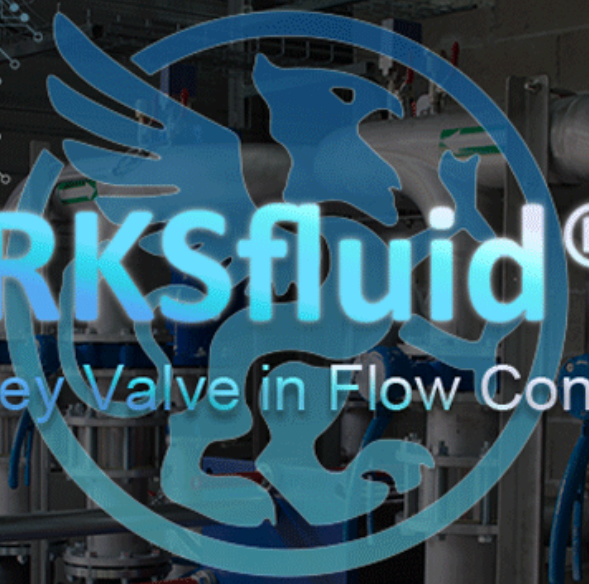

Butterfly Valve

Ball Valve


Gate Valve

Globe Valve

Check Valve

Pipe Fittings

DESIGN FEATURES

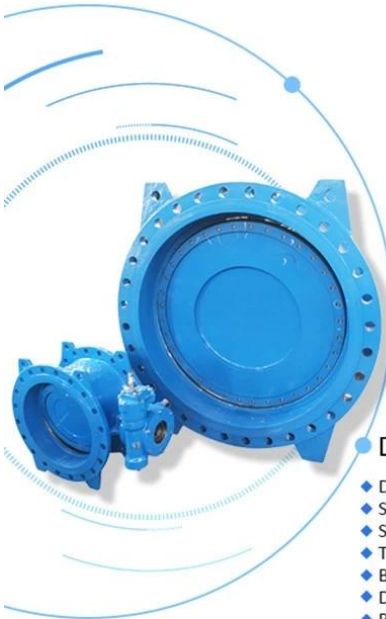

SPECIFICATION	
Nominal pressure (MPa)	1.6
Testing pressure(MPa)	Seal 2.4
	Shell 1.76
Working pressure (MPa)	1.6
Suitable temperature (°c)	<80°c
Suitable medium	Water


TECHNICAL REQUIREMENT

- 1.Face to face standard: EN 558 Series 14.
- 2.Flanges standard: BS EN1092-2:1997 PN16.
- 3.Tests standard: BS EN12266-1:2003 Part 1 Rate A.

DESCRIPTION :

- ◆ Double Flange Eccentric Resilient Seated Butterfly Valve
- ◆ Size Range DN100-DN3000
- ◆ Standard - ISO / BS / DIN / AWWA / API
- ◆ Tests Standard - BS EN 12266-1
- ◆ Body - Ductile Iron / Cast Iron / Stainless Steel / WCB
- ◆ Disc - Ductile Iron / Cast Iron / Stainless Steel / WCB
- ◆ Body Ring -SS420 / SS304 / SS316
- ◆ Retaining Ring - SS420 / SS304 / SS316
- ◆ Disc Ring -EPDM
- ◆ Shaft - SS420 / SS431 / SS316
- ◆ Fusion Bonded Epoxy Coating - Min 300 Microns

The designs, material and specifications shown are subject to change without notice due to our continuing programme of product development.

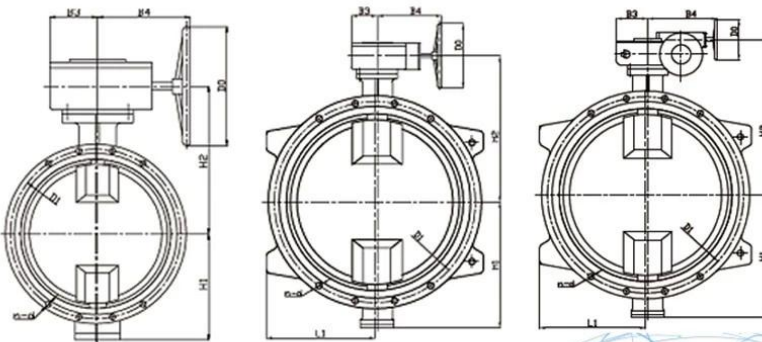

DN100-DN600

DN700-DN800

DN900-DN3000

APPLICATION SCENARIO





၀၀ ၀၀ ၀ ၀၀၀ ၀၀. ၀၀ ၀၀, ၀၀ ၀၀ ၀၀. ၀၀ ၀ ၀၀ : ၀၀ ၀၀, ၀၀, ၀၀၀, ၀၀, ၀၀ ၀၀, ၀၀၀၀ ၀၀ ၀, ၀၀
 ၀ ၀၀၀, ၀၀ ၀၀. ၀၀၀၀ ၀၀ ၀၀၀ "၀၀ ၀ ၀၀, ၀၀၀ ၀၀ ၀ ၀၀၀၀ ၀၀၀ ၀၀၀၀၀ ၀၀၀ ၀၀၀၀၀ ၀၀၀၀ ၀၀၀
 ၀၀. ၀၀၀ ၀၀ ၀၀ ၀၀၀၀. ၀၀ ၀၀၀ ၀၀၀ ၀၀ ၀၀၀၀၀!

Our Certificates



Exhibition Photos



