

STANDARD MATERIALS SELECTION

NAME	MATERIAL
Body	Cast Iron Ductile Iron
Disc	Nickel Coated DI / CI Epoxy Coated DI / CI Nylon Coated DI / CI CF8 Stainless Steel CF8M Stainless Steel Duplex Stainless Steel Super Duplex Stainless Steel Aluminum Bronze
Stem	SS410 Stainless Steel SS420 Stainless Steel SS431 Stainless Steel SS304 Stainless Steel SS316 Stainless Steel
Seat	EPDM NBR(BUNA-A) PTFE

TECHNICAL PARAMETERS

NAME	
Size	DN50-DN800(NPS2-NPS32)
Pressure	PN10/PN16(Class 150)
Connection	Wafer, Lug
Flange Drilling	DIN2501 PN10/16 ANSI 150LB、JIS B2210 5K/10K

Other material and dimension on request



Design Standard

Design Standard	ISO 10631 GB/T 12238 BS EN593 DIN3345 JIS B2032
Face to Face	ISO 5752 GB/T 12221 ASME B16.10 BS558-1 DIN3032 JIS B2002
Flange Standard	ISO 7005 GB/T 17214 ASME B16.1 ASME B16.5 BS EN1092 GB/T 9113 DIN2501 JIS 2211-2212
Top Flange	ISO 5211 GB/T 12223
Pressure Test	ISO 5208 GB/T 13927 API598 BS EN12266 DIN 17480 JIS B2003

DESIGN FEATURES

DURABLE

- No-pin connection, 1 pc blow-out proof stem
- DI/CI Nodularity over 95%

ANTI-CORROSION


Material: Epoxy powder: AkzoNobel



- Coating Thickness: 200-250µm
- Spraying temp: over 200°C. Doesn't fade, even wipe with diethyl ether

QUALITY STANDARD

- 100% quality test, follow DIN, ASTM, JIS, GB/T, ISO, BS EN, API
- ONLY ONE Manufacturer get CE certification up to DN1800
- 2 years warranty. 15000 times On-off test, 30000 times Destructive experiment

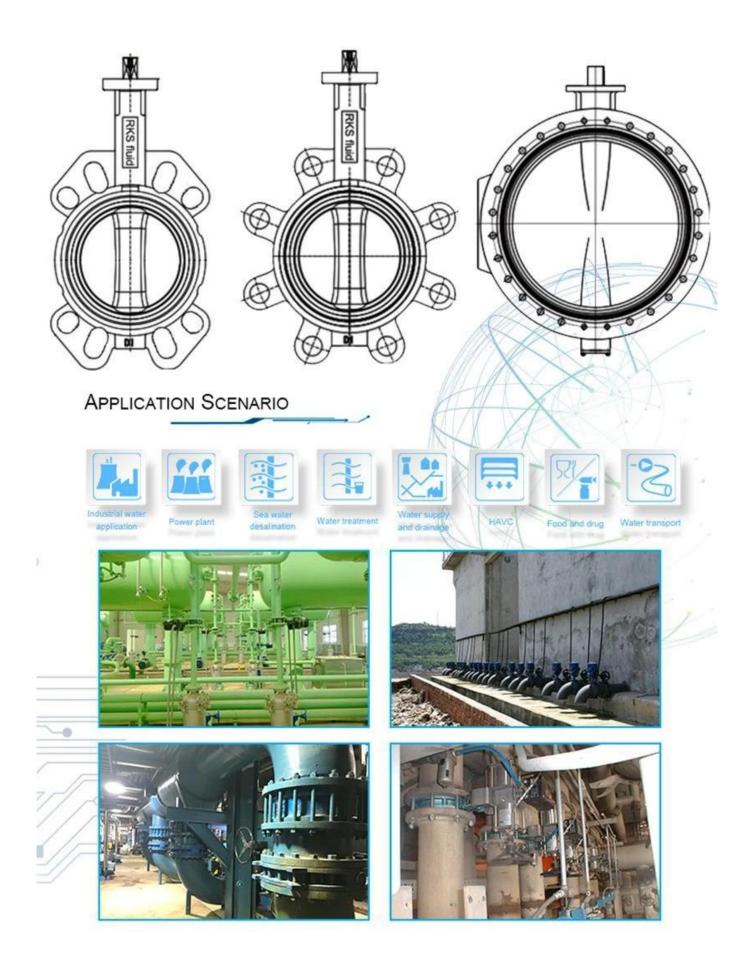

Our Factory





21 years of professional experience

03

Independent research and development team 28 top senior professional researchers

09

01

100% high level ex-factory inspection

2 years quality assurance, repair and replacement

Company Advantages

50

04

06

4 factories

2 professional testing centers

High quality imported materials



I Business area: fluid control products, technology and environmental protection products.

Il Advanced numerical control work centers, professional process cells, wide-range welding equipment, automatic assembly lines and coating.

III China standard reference unit, to participate in the development of the relevant valve industry standards.

IV We have set up a research and development center in Houston, Texas, in the United States.

V Product standard: GB, German standard, American standard, TUV CE, ISO 9001, ADWO-2000, TS, PED, WRC WRAS, KTW, API 6D, API609.

VI Main production: <u>throttle</u>, ball valve, gate valve, non-return valve, globe valves, pipe fittings, manual / pneumatic / electric actuator, valve parts.

Exhibition Photos





FAQ

Q: If I need a quote, what information do we need?

A: valve materials, temperature, pressure, medium, application system.

Q: Can you supply actuators, what do you have?

A: Pneumatic, electric, hydraulic, solenoid solenoid valves. RKSfluid actuators adopt US technology. What you need, just tell us.

Q: What is your production capacity?

A: RKSfluid has four plants that can supply the products you need.

Q: production lead time

A: Normal products are available in 2 \sim 5 working days. Custom base for your needs.

Q: MOQ

A: 1 pc for all products.

Q: How about quality assurance?

A: 100% quality test before delivery, 2 years warranty. Ensure the safe operation of the system.

We have obtained TUV, API, WRAS, CE, ISO certification.

Standard compliant with DIN, ASME, BS EN, JIS, API, AWWA.

Q: How can we provide quality service to our customers?

A: RKSfluid has 20 years of experience and over 70 R&D engineers provide technical support, model selection and installation guide.