
Low pressure drop and 100% watertight, low torque.

Size range: DN20, DN25, DN32, DN40, DN50

Wedge core: brass for DN20-32, DI for DN40-50

- Threaded connection, BSPP, BSPT, NPT
- 100% sealing test
- 100% tightness Bi-directional flow.
- · Low pressure drop.
- · Detachable in load.
- · Screws protected against external dirts WRAS approved for potable water upon request.
- · Hydraulic tests according to EN-12266-1, Class A
- Designed to EN1074-2
- \cdot BSP threads to EN10226/1 or EN ISO 228-1 G thread NPT threads upon request

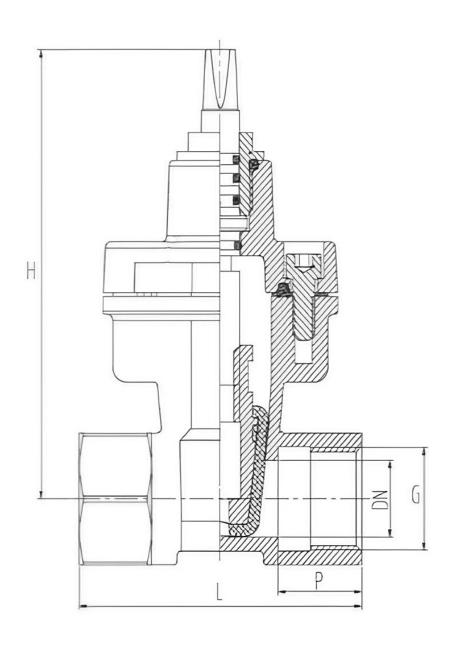

Size	G (inch) BSP thread	L (mm) end-end	H (mm)	P (mm)	Torque (N.m)
DN20	3/4"	95	145	27	15N.m
DN25	1"	105	145	30	15N.m
DN32	1 1/4"	120	150	32	15N.m
DN40	1 1/2"	130	202	37	30N.m
DN50	2"	150	197	45	30N.m





APPLICATION SCENARIO

















Industrial water application

Power plant

Sea water desalination

Water treatment

Water supply and drainage

HAVC

Food and drug Water transport









COMPANY FACTORY













COMPANY INFORMATION



I Business area: fluid control products, technology and environmental protection products.

II Advanced CNC machining centers, professional process cells, wide-range welding equipment, automatic assembly lines and coating.

I China's standard reference unit, to participate in the development of relevant valve industry standards. ■

IV We have set up a research and development center in Houston, Texas, in the United States.

V Product Standard: GB, German Standard, American Standard, TUV CE, ISO 9001, ADWO-2000, TS, PED, WRC WRAS, KTW, API 6D, API609.

VI Main production: butterfly valve, ball valve, gate valve, check valve, globe valves, pipe fittings, manual / pneumatic / electric actuator, valve parts.























COMPANY EXHIBITION

























Partners





































FAQ

Q: If I need quotation, what informations do we need?

A: Valves' materials, Temperature, Pressure, Medium, Appllication System.

Q: Can you provide actuators, what you have?

A: Pneumatic, Electric, Hrdraulic, Solenoid Valves. RKSfluid actuators adopt USA technology. Which you need, just tell us.

Q: What's your productive capacity?

A: RKSfluid has four plants that can provide the products you need.

Q: Production lead time

A: Normal products have stock in 2~5 working days. Customized base on your need.

Q: MOQ

A: 1pc for all products.

Q: How about the quality assurance?

A: 100% quality test before delivery, 2 years warranty. Ensure your system working safety. We got TUV, API, WRAS, CE, ISO certification.

Standard conform to DIN, ASME, BS EN, JIS, API, AWWA.

Q: How could you provide quality service to our customers?

A: RKSfluid own 27 years experiences and more than 70 R&D engineers provide technical support, model selection and installation guidance for you.