



RKSfluid®

A key Valve in Flow Control



Butterfly Valve



Ball Valve



Gate Valve



Globe Valve




Check Valve



Pipe Fittings



This series tilting check valves are suitable to be used at the exit of the pump whose medium is water. It is used to prevent or reduce medium back from water hammer. So it can protect the pipeline system. Suitable temperature $\leq 80^{\circ}\text{C}$

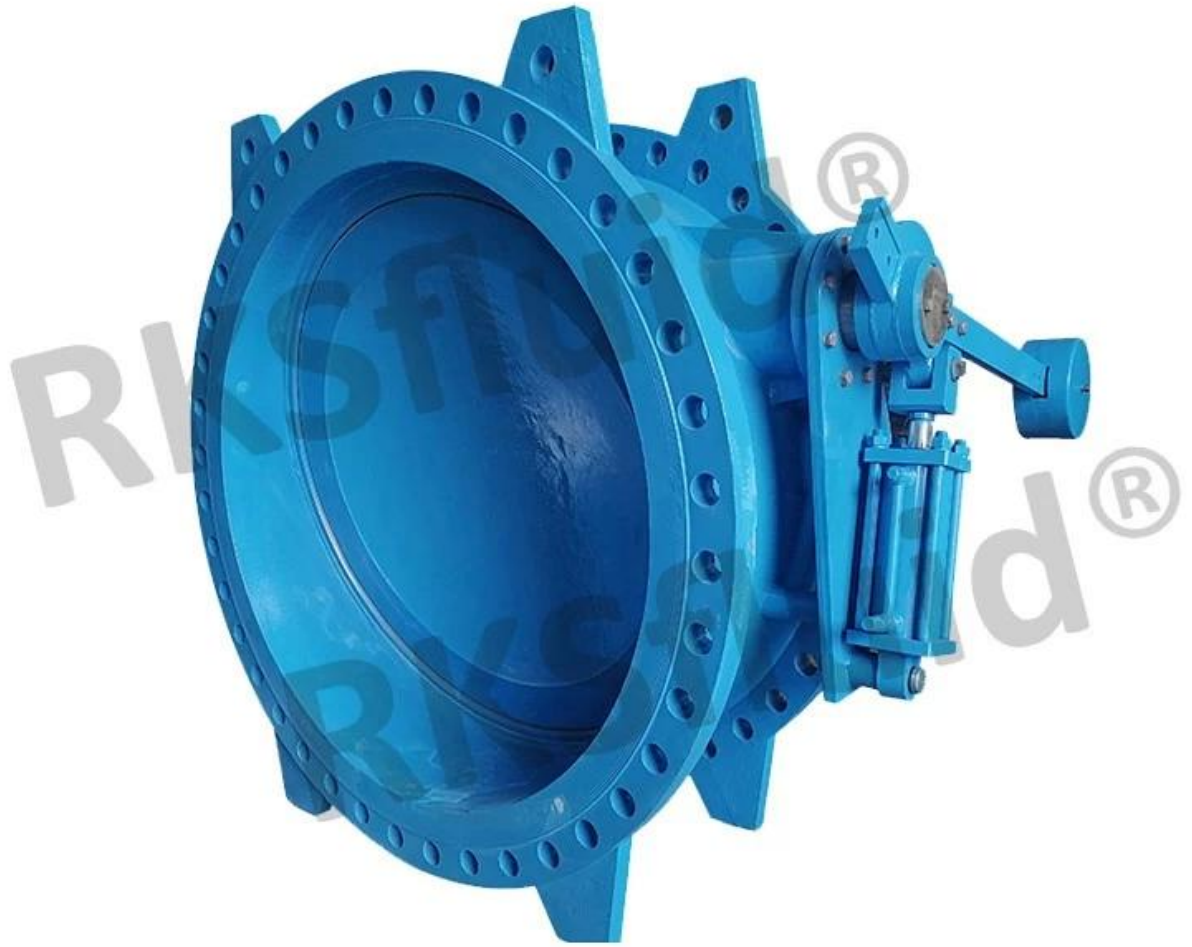

TILTING CHECK VALVE (BUTTERFLY CHECK VALVE)
DN100-DN1200,PN10/16/25

Features

- Double flange tilting check valve with Hydraulic damper
- Size range DN100–1200mm
- Standard–ISO/ BS/DIN /AWWA/API
- Tests standard–BS EN 12266–1
- Body–Ductile Iron/Cast Iron/Stainless Steel/WCB
- Disc–Ductile iron /Cast Iron/Stainless Steel /WCB

- Body Ring–SS420/SS304/SS316
- Retaining Ring–SS420/SS304 /SS316
- Disc Ring–EPDM
- Shaft–420/S5431 /SS316
- Fusion bonded epoxy coating– Min 300 Microns

SPECIFICATION

| | | |
|---------------------------|-------|-------|
| Nominal pressure (MPa) | | 1.6 |
| Testing pressure(MPa) | Seal | 2.4 |
| | Shell | 1.76 |
| Working pressure (MPa) | | 1.6 |
| Suitable temperature (°c) | | <80°c |
| Suitable medium | | Water |

TECHNICAL REQUIREMENT

- 1.Face to face standard: EN 558 Series 14.
- 2.Flanges standard: BS EN1092-2:1997 PN16.
- 3.Tests standard: BS EN12266-1:2003 Part 1 Rate A .

MATERIALS OF CONSTRUCTION

| No. | Part Name |
|-----|-------------------|
| 1 | Body |
| 2 | Shaft bushes |
| 3 | Shaft |
| 4 | Cover |
| 5 | Retainer ring |
| 6 | Disc sealing ring |
| 7 | Body sealing ring |
| 8 | Disc |
| 9 | Weight |

Our Factory



Company Advantages

01

21 years of professional experience

03

Independent research and development team
28 top senior professional researchers

05

100% high level ex-factory inspection

07

2 years quality assurance, repair and replacement

4 factories

02

2 professional testing centers

04

High quality imported materials

06



I Business area: fluid control products, technology and environmental protection products.

II Advanced CNC machining centers, professional process cells, wide-range welding equipment, automatic assembly lines and coating.

III China's standard reference unit, to participate in the development of relevant valve industry standards.

IV We have set up a research and development center in Houston, Texas, in the United States.

V Product Standard: GB, German Standard, American Standard, TUV CE, ISO 9001, ADWO-2000, TS, PED, WRC WRAS, KTW, API 6D, API609.

VI Main production: [butterfly valve](#), ball valve, gate valve, check valve, globe valves, pipe fittings, manual / pneumatic / electric actuator, valve parts.

Exhibition Photos



Our Certificates



FAQ

Q: If I need quotation, what informations do we need?

A: Valves' materials, Temperature, Pressure, Medium, Application System.

Q: Can you provide actuators, what you have?

A: Pneumatic, Electric, Hydraulic, Solenoid Valves. RKSfluid actuators adopt USA technology. Which you need, just tell us.

Q: What's your productive capacity?

A: RKSfluid has four plants that can provide the products you need.

Q: Production lead time

A: Normal products have stock in 2~5 working days. Customized base on your need.

Q: MOQ

A: 1pc for all products.

Q: How about the quality assurance?

A: 100% quality test before delivery, 2 years warranty. Ensure your system working safety.

We got TUV, API, WRAS, CE, ISO certification.

Standard conform to DIN, ASME, BS EN, JIS, API, AWWA.

Q: How could you provide quality service to our customers?

A: RKSfluid own 20 years experiences and more than 70 R&D engineers provide technical support, model selection and installation guidance for you.