DESIGN FEATURES

Features

- Use AkzoNobel material.
- Super Anti-corrosion
- Epoxy powder coating 200-250um,
- Baking varnish over 200℃,

NO.		
1	Body	GGG50
2	Dise	GGG40+EPDM
3	Wedge nut	C48600
4	Stem	SS431
5	Bonnet	GT450-10
6	Gasket	EPDM
7	Y-ring	EPDM85-90
8	Fix ring	CuZn21Si3/C69300
9	Thrust bearing	C69300
10	Seal ring	EPDM70
11	O ring	NBR
12	Retainer ring	POM
13	Bushing ring	POM
14	Gland	SS431
15	Dustproof ring	EPDM85
16	Dise core	GGG40
17	Bolt	SS316

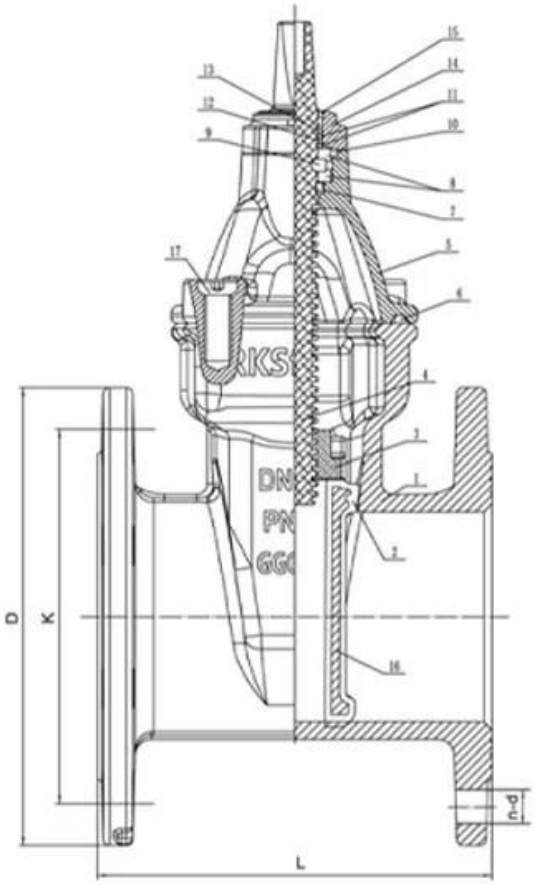

Free wedge nut, **reduces the stem bending forces** and at the same time enables it to be easily replaced.

The more compact new cap, reduces the water retention areas in order **to reduce the risk of bacterial growth**.

One piece stainless steel stem in for **better resistance to axial load and to with stand higher operating torques**.

Three locking tab for bayonet system prevents self-dismantling.

Dust guard integrating three O-ring shape, **prohibiting the introduction of foreign** bodies at the stem.

Male guiding system with composite sliding skate reduces the wear of the wedge against the body, allowing a smooth functionality and a longer life time of the valve.

Triple seal at the operating stem to ensure tightness with the test of time (2500 cycles).

New male composite sliding skate technology ensuring a low operating torque even under high differential pressure and preventing damage or corrosion generated by the friction.

RELATED PRODUCTS

APPLICATION SCENARIO

Industrial water application | Power plant | Sea water desalination | Water treatment | Water supply and drainage | HAVC | Food and drug | Water transport

COMPANY FACTORY

COMPANY INFORMATION

Ⅰ Área comercial: produtos para controle de fluidos, produtos tecnológicos e proteção ambiental.

Ⅱ Centros avançados de processamento de CNC, células de processo profissional, equipamentos de soldagem de grande alcance, linhas automáticas de montagem e revestimento.

Ⅲ Unidade de referência padrão da China, para participar do desenvolvimento dos padrões do setor de válvula relevante.

Ⅳ Estabelecemos um Centro de Pesquisa e Desenvolvimento em Houston, Texas, Estados Unidos.

Ⅴ padrão do produto: GB, Padrão Alemão, American Standards, Ten CE, ISO 9001, ADWO-200, TS, PED, WRC WRAS, KTW, API 6D, API609.

Ⅵ Produção principal: válvula de borboleta, válvula de esfera, válvula de porta, válvula de repetição, válvulas globais, acessórios de tubo, atuador manual / pneu / elétrico, peças de válvula.

01
21 years of professional experience
02
4 factories
03
Independent research and development team
28 top senior professional researchers
04
2 professional testing centers
05
100% high level ex-factory inspection
06
High quality imported materials
07
2 years quality assurance, repair and replacement

COMPANY QUALIFICATION

COMPANY EXHIBITION

Perguntas mais frequentes

P: Se eu precisar de um preço, de que informação precisamos?
A: Materiais da válvula, temperatura, pressão, veículo, sistema de aplicação.

P: Você pode fornecer atuadores, o que você tem?
A: válvulas pneumáticas, elétricas, hrdraulic e solenóides. Os atores RKSfluid adotam a tecnologia americana. Você precisa, basta nos dizer.

P: Qual é a sua capacidade de produção?
R: RKSfluid possui quatro plantas que podem fornecer os produtos necessários.

D: Tempo de entrega de produção
R: Os produtos normais têm ações em 2 ~ 5 dias úteis. Base personalizada em necessidade.

D: MOQ
A: 1 PC para todos os produtos.

P: E a garantia de qualidade?
R: Testes de qualidade 100% antes da entrega, garantia de 2 anos. Verifique se o seu sistema de segurança.
Obtivemos a certificação ISO TUV, API, WRAS, CE, ISO.
Standard Meets Din, Asme, BS in, Jis, API, Awwa.

P: Como você poderia fornecer serviço de qualidade aos nossos clientes?
R: RKSfluid tem 20 anos de experiências e mais de 70 engenheiros de P&D fornecem suporte técnico, seleção de modelos e indicações de instalação para você.