



RKsfluid®

A key Valve in Flow Control



Butterfly Valve



Ball Valve



Gate Valve



Globe Valve



Check Valve



Pipe Fittings

DESIGN FEATURES

DURABLE

- 1 piece non-welded PFA molded DSS Disc stem
- Precision casting WCB/CF8M Bodies

TRIPLE SEAL



- Triple Seal: Spring loaded Mechanical seal, Radial Lip Seal, FPM
- China ONLY ONE Manufacturer 400Mpa Isostatic pressing PTFE seat, consistent density

ANTI-CORROSION

- Material: Epoxy powder: AkzoNobel, Earth Best!
- Coating Thickness: 200-250μm
- Spraying temp: over 200°C. Doesn't fade, even wipe with diethyl ether

QUALITY STANDARD

- 100% quality test, follow DIN, ASTM, JIS, GB/T, ISO, BS EN, API
- ONLY ONE Manufacturer get CE certification up to DN1800
- 2 years warranty. 15000 times On-off test, 30000 times Destructive experiment

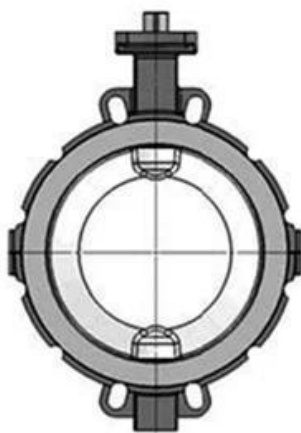

APPLICATION SCENARIO



Industrial water application



Nuclear plant



Petroleum



Steel



Wastewater treatment



Acid-base



Food



Irrigation



Our Factory



Company Advantages

01

21 years of professional experience

03

Independent research and development team
28 top senior professional researchers

05

100% high level ex-factory inspection

07

2 years quality assurance, repair and replacement

4 factories

02

2 professional testing centers

04

High quality imported materials

06



area 100000 square meters: 100000 square meters of land area, 100000 square meters of building area, 100000 square meters of parking area, 100000 square meters of green area, 100000 square meters of water area, 100000 square meters of other area.

centers 100000 square meters: 100000 square meters of land area, 100000 square meters of building area, 100000 square meters of parking area, 100000 square meters of green area, 100000 square meters of water area, 100000 square meters of other area.

reference 100000 square meters: 100000 square meters of land area, 100000 square meters of building area, 100000 square meters of parking area, 100000 square meters of green area, 100000 square meters of water area, 100000 square meters of other area.

IV 100000 square meters: 100000 square meters of land area, 100000 square meters of building area, 100000 square meters of parking area, 100000 square meters of green area, 100000 square meters of water area, 100000 square meters of other area.

Standard 100000 square meters: GB, 100000 square meters, 100000 square meters, TUV CE, ISO 9001,

ADWO-2000, TS, PED, WRC WRAS, KTW, API 6D, API609

VI มาตรฐาน: มาตรฐาน, มาตรฐาน, มาตรฐาน, มาตรฐาน, มาตรฐาน, มาตรฐาน, มาตรฐาน / มาตรฐาน / มาตรฐาน, มาตรฐาน

Exhibition Photos



Our Certificates



한국수자원공사

질문: 한국수자원공사에서 사용하는 수처리약품은 무엇인가요?

답: 한국수자원공사에서 사용하는 수처리약품은 RKSfluid입니다.

질문: RKSfluid의 주요 성분은 무엇인가요?

답: RKSfluid의 주요 성분은 Hrdraulic, RKSfluid, RKSfluid입니다. RKSfluid는 수처리약품으로, 수처리공정에 사용됩니다.

Q: RKSfluid의 사용 방법은 무엇인가요?

A: RKSfluid는 수처리공정에 사용됩니다. 사용 방법은 RKSfluid의 사용 설명서를 참조하십시오.

Q: RKSfluid의 사용량은 얼마인가요?

A: RKSfluid의 사용량은 2 ~ 5 리터/톤입니다. 사용량은 수처리공정의 종류와 수질에 따라 달라집니다.

Q: RKSfluid의 가격은 얼마인가요?

A: 1 리터당 1,000원입니다.

질문: RKSfluid의 품질은 어떻게 보장되나요?

답: RKSfluid의 품질은 100% 보장됩니다. RKSfluid는 2 리터당 1,000원입니다. RKSfluid의 품질은 RKSfluid의 사용 설명서를 참조하십시오.

RKSfluid는 TUV, API, WRAS, CE, ISO 인증을 받았습니다.

RKSfluid는 DIN, ASME, BS EN, JIS, API, AWWA 인증을 받았습니다.

질문: RKSfluid의 사용 기간은 얼마나 오래인가요?

답: RKSfluid는 20 리터당 1,000원입니다. RKSfluid의 사용 기간은 70 R & D입니다. RKSfluid의 사용 기간은 RKSfluid의 사용 설명서를 참조하십시오.