

DESIGN FEATURES

DURABLE


- No-pin connection, 1 pc blow-out proof stem
- DI/CI Nodularity over 95%

ANTI-CORROSION

- Material: Epoxy powder:  Earth Best!
- Coating Thickness: 200-250µm
- Spraying temp: over 200°C. Doesn't fade, even wipe with diethyl ether

QUALITY STANDARD

- 100% quality test, follow DIN, ASTM, JIS, GB/T, ISO, BS EN, API
- ONLY ONE Manufacturer get CE certification up to DN1800
- 2 years warranty. 15000 times On-off test, 30000 times Destructive experiment

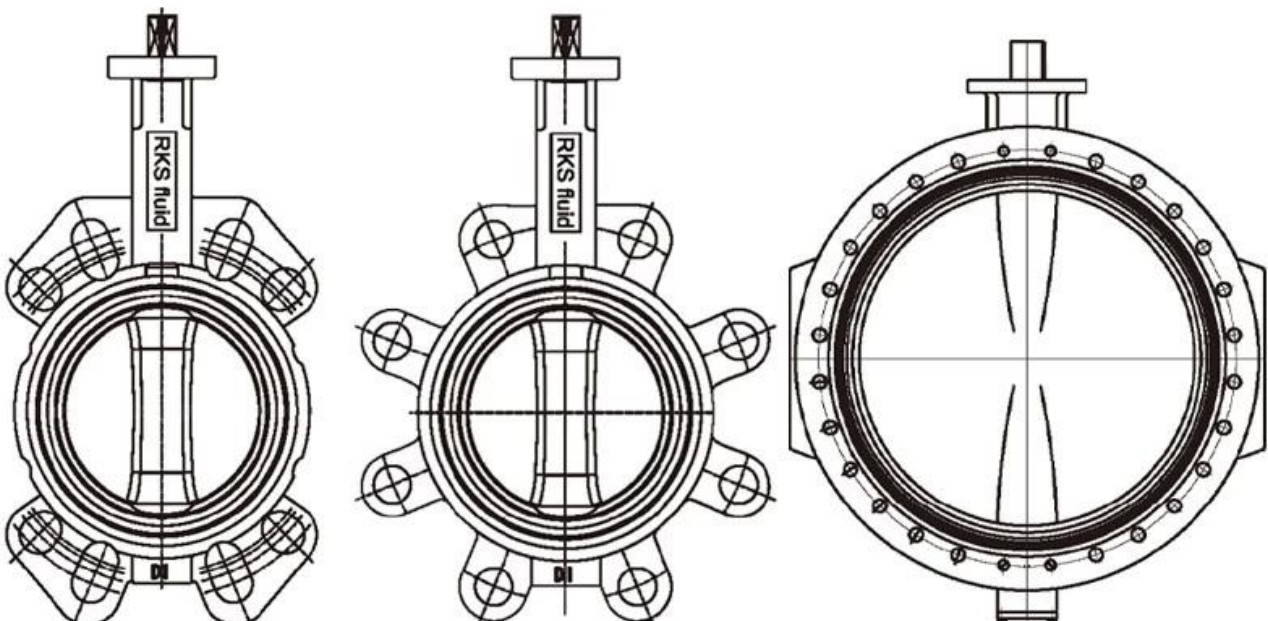

APPLICATION SCENARIO



Industrial water application



Power plant



Sea water desalination



Water treatment



Water supply and drainage



HAVC



Food and drug



Water transport



COMPANY FACTORY



[illegible]

ii) วัตถุประสงค์ของโครงการ CNC คืออะไร, โครงการนี้จะมีประโยชน์อย่างไร, โครงการนี้จะช่วยพัฒนาอะไรบ้าง

[illegible]

iv

✓**certifications:** GB, **certifications**, **certifications**, TUV CE, ISO 9001, ADWO-2000, TS, PED, WRC WRAS, KTW, API 6D, API609

VI 000000000000: 000000000000, 00000000, 000000000000, 000000000000, 000000000000, 000000000000, 00000000 / 00000000 / 000000000000000000, 00000000000000



COMPANY QUALIFICATION



[illegible]

□ □ : □ ?

:

[illegible]

0000: 00000000, 000000, hrdraulic, 0000000000000000 RKSfluid Actuators 000000000000000000
 00000000 0000000000000000000000000000000000

□ □ □ : □ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □ ?

```

#####: RKSfluid #####

```

□□□ : □□□□□□□□□□□□□□

[illegible]

000:	moq
------	-----

[illegible]

□ □ □ □ : □ ?

0000: 0000000000000000 100% 00000000000000000000000000000000 2 00 00000000000000000000000000000000
000000000000000000

□□□□□□□□ TUV, API, WRAS, CE, □□□□□□□□ ISO

□□□□□□□□□□□□□□□□ DIN, ASME, BS EN, JIS, API, AWWA

QUESTION:

公司: RKSfluid 公司位于美国加利福尼亚州 20 年来的 R&D 经验 70 多年来，公司一直专注于
 开发和生产各种工业流体系统，包括泵、阀门、管道和密封件。