


Specifications

Design and construction of this vessel complies with the requirements of the American Society of Mechanical Engineers Section VIII (ASME) Code for Unfired Pressure Vessels, Edition 2001, and is constructed of FRP (Fiberglass Reinforced Plastic). The vessel is designed for a maximum operating pressure of 300psi and a maximum temperature of 1200psi.


* The vessel is designed for a maximum operating pressure of 300psi and a maximum temperature of 1200psi.



8 " 300 psi ~ 1200 psi

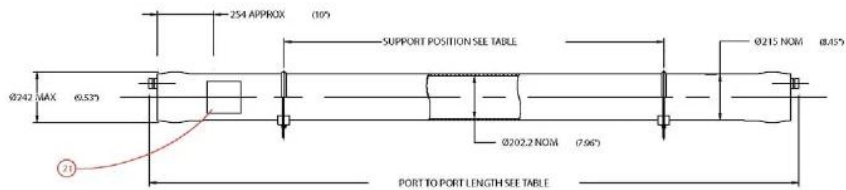

1 ~ 7
300PSI, 400PSI, 600PSI, 1000PSI & 1200PSI
-7 °C ~ 49 °C
Reliable & Safe

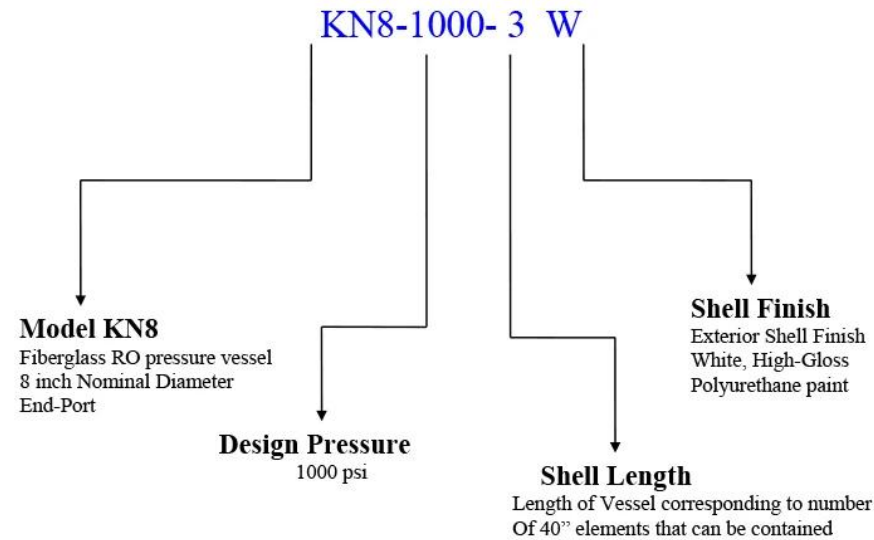

COMPANY INFORMATION



300 1200 psi

[illegible]