

DESIGN FEATURES




Features



- Use AkzoNobel material.
- Super Anti-corrosion
- Epoxy powder coating 200-250um,
- Baking varnish over 200°C,

NO.		
1	Body	GGG50
2	Dise	GGG40+EPDM
3	Wedge nut	C48600
4	Stem	SS431
5	Bonnet	GT450-10
6	Gasket	EPDM
7	Y-ring	EPDM85-90
8	Fix ring	CuZn21Si3/C69300
9	Thrust bearing	C69300
10	Seal ring	EPDM70
11	O ring	NBR
12	Retainer ring	POM
13	Bushing ring	POM
14	Gland	SS431
15	Dustproof ring	EPDM85
16	Dise core	GGG40
17	Bolt	SS316

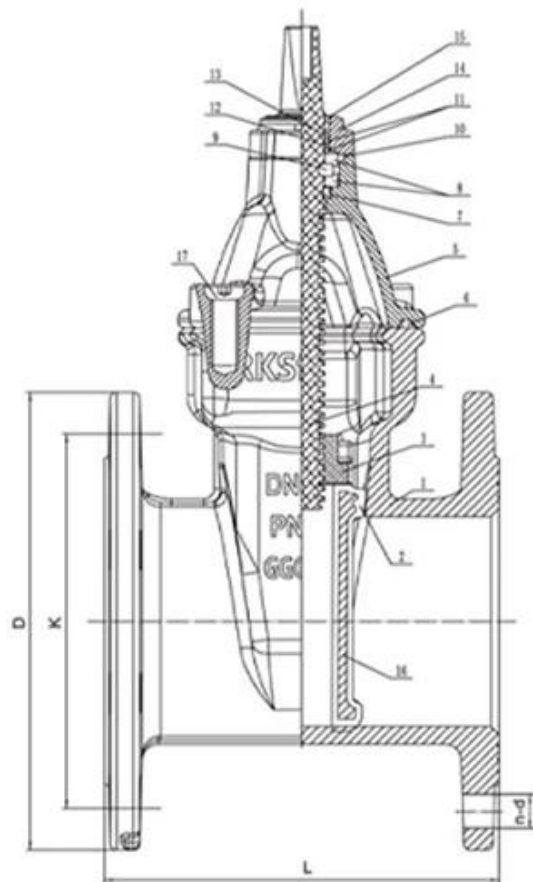



Free wedge nut, **reduces the stem bending forces** and at the same time enables it to be easily replaced.



The more compact new cap, reduces the water retention areas in order to **reduce the risk of bacterial growth**.



One piece stainless steel stem in for **better resistance to axial load and to with stand higher operating torques**.



Three locking tab for bayonet system prevents self-dismantling.



Dust guard integrating three O-ring shape, **prohibiting the introduction of foreign bodies** at the stem.



Male guiding system with composite sliding skate reduces the wear of the wedge against the body, allowing a smooth functionality and a longer life time of the valve.



Triple seal at the operating stem to ensure tightness with the test of time (2500 cycles).



New male composite sliding skate technology ensuring a low operating torque even under high differential pressure and preventing damage or corrosion generated by the friction.



APPLICATION SCENARIO



Industrial water application



Power plant



Sea water desalination



Water treatment



Water supply and drainage



HAVC



Food and drug



Water transport



COMPANY FACTORY





I _____:

[illegible]

III

IV

V 00000000000000000000: GB, 0000000000000000, 0000000000000000, TUV CE, ISO 9001, ADWO-2000, TS, PED, WRC WRAS, KTW, API 6D, API609

[illegible]

01

21 years of professional
experience

03

Independent research and
development team
28 top senior professional
researchers

05

100% high level ex-factory
inspection

07

2 years quality assurance,
repair and replacement

4 factories

02

2 professional testing
centers

04

High quality imported
materials

06

COMPANY QUALIFICATION



COMPANY EXHIBITION



Partners



Delivery



Payment



F

Q: What is the main product of your company?

A: Our main product is a series of hydraulic cylinders, which are used in various industrial applications.

Q: What are the main features of your products?

A: Our products are made of high-quality materials, have a long service life, and are easy to maintain. They are also available in various sizes and specifications to meet different needs.

Q: What is the price of your products?

A: The price of our products depends on the quantity and specifications. We can provide a quote based on your requirements.

Q: What is the lead time of your products?

A: The lead time of our products is usually 2 to 5 weeks, depending on the quantity and specifications.

Q: What is the warranty of your products?

A: We provide a 1-year warranty for our products, and we can also provide a longer warranty if needed.

Q: What are the main certifications of your products?

A: Our products have been certified by TUV, API, WRAS, CE, ISO, DIN, ASME, BS EN, JIS, API, and AWWA.

Q: What is the contact information of your company?

A: RKSfluid 27 R&D 70