

DESIGN FEATURES

TECHNICAL REQUIREMENT

- 1.Design standard:BS 5163.
- 2.Face to face:BS 5163.
- 3.Flanges standard:BS EN1092-2:1997 PN16.
- 4.Test standard:BS EN12266-1 Rate B.

FEATURES

- Double flange metal seated gate valve
- Size Range:DN50-DN2000
- Standard-ISO/BS/DIN/AWWA/API
- Tests Standard-BS EN 12266-1
- Body Ring-Bronze/SS420/SS304/SS316
- Body-Ductile Iron /Cast Iron/Stainless Steel /WCB
- Fusion bonded epoxy coating-min 300 microns



RELATED PRODUCTS



SMALL DIAMETER GATE VALVE
DN50-DN300,PN10/16/25



METAL SEATED GATE VALVE
DN350-DN600,PN10/16/25



LARGE DIAMETER
METAL SEATED GATE VALVE
DN700-DN2000,PN10/16/25

APPLICATION SCENARIO



Industrial water
application



Power plant



Sea water
desalination



Water treatment



Water supply
and drainage



HAVC





Food and drug



Water transport



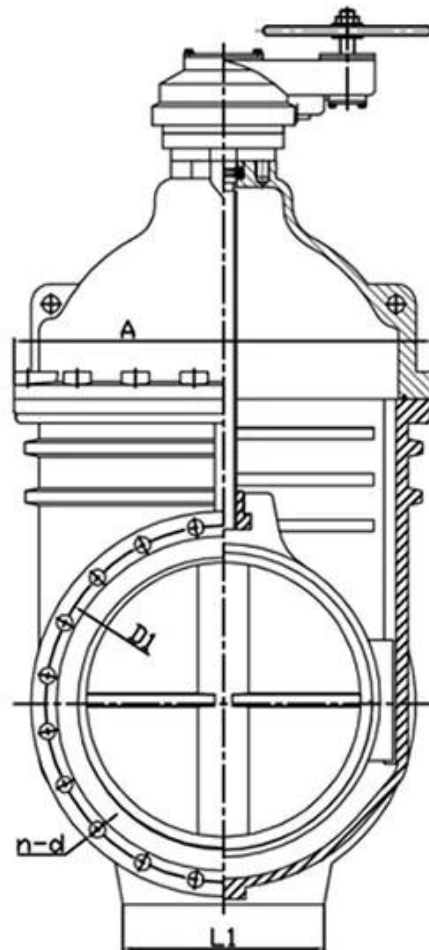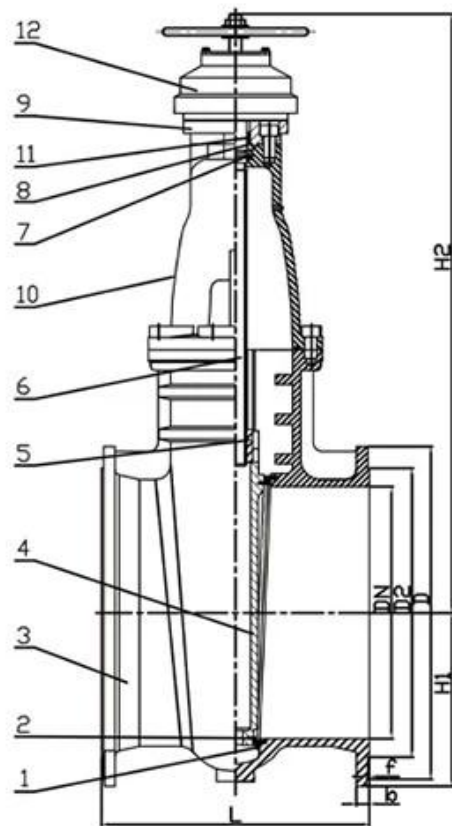

RELATED PRODUCTS



SMALL DIAMETER GATE VALVE
DN50-DN300, PN10/16/25



METAL SEATED GATE VALVE
DN350-DN600, PN10/16/25



**LARGE DIAMETER
METAL SEATED GATE VALVE**
DN700-DN2000, PN10/16/25

[illegible]

ii) 0000000000000000 CNC 0000000, 000000000000000000000000, 0000000000000000000000,
000000000000000000000000000000

unit

iv

✓**certifications:** GB, **certifications**, **certifications**, TUV CE, ISO 9001, ADWO-2000, TS, PED, WRC WRAS, KTW, API 6D, API609

VI 000000000000: 000000000000, 00000000, 000000000000, 000000000000, 000000000000, 000000000000, 00000000 / 00000000 / 000000000000000000, 00000000000000

01

21 years of professional
experience

03

Independent research and
development team
28 top senior professional
researchers

05

100% high level ex-factory
inspection

07

2 years quality assurance,
repair and replacement

4 factories

02

2 professional testing
centers

04

High quality imported
materials

06

COMPANY QUALIFICATION





□ □ □ □ □ □ □ □ □ □ □ □ □ □

[illegible]

:

[illegible]

0000: 00000000, 000000, hrdraulic, 0000000000000000 RKSfluid Actuators 000000000000000000
 00000000 000000000000000000000000000000000000

□□□ : □□□□□□□□□□□□□□□□□□□□□□□□□□?

```
0000: RKSfluid 00000000000000000000000000000000000000000000000000000
```

□□□ : □□□□□□□□□□□□□□

: 2 ~ 5

□□□: **moq**

A: 1pc

□ □ □ □ : □ ?

100% 2

□□□□□□□□ TUV, API, WRAS, CE, □□□□□□□□ ISO

DIN, ASME, BS EN, JIS, API, AWWA

QUESTION:

公司: RKSfluid 公司位于美国加利福尼亚州 20 年来的 R&D 经验 70 多年来，公司一直专注于
 开发和生产各种工业流体系统，包括泵、阀门、管道和密封件。