



DESIGN FEATURES



This series of butterfly valves are used for industrial pipelines, as bi-directional open and close and regulation devices, the adjustment range is from 40°C-90°C full open. Suitable temperature $\geq 80^{\circ}\text{C}$

Features

- Size range DN100-1200mm
- Standard-ISO/BS/DIN/AWWA/API
- Tests Standard-BS EN 12266-1
- Body-Ductile Iron/Cast Iron/Stainless Steel /WCB
- Body Ring-SS420/SS304/SS316
- Disc Ring-EPDM
- Shaft-SS420/SS431/SS316
- Fusion bonded epoxy coating-Min 300 Microns

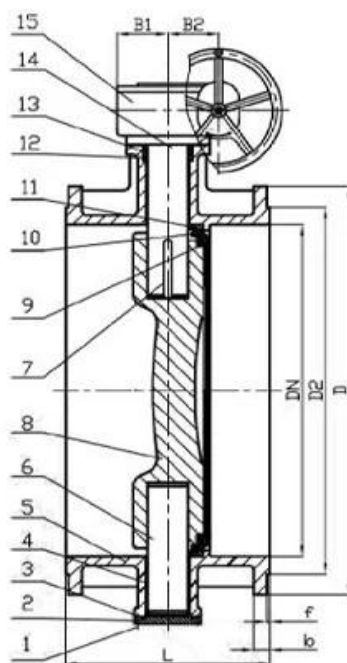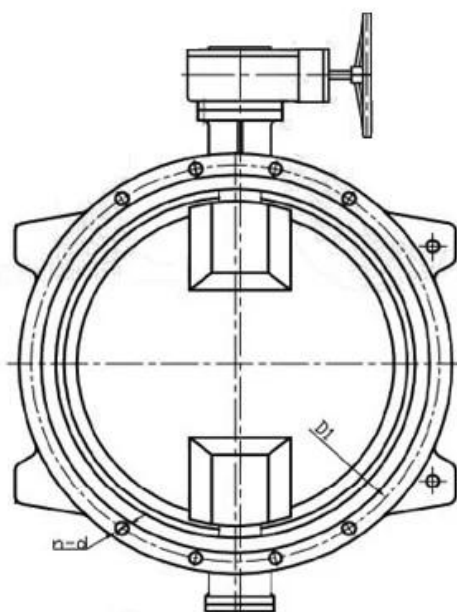

APPLICATION SCENARIO



Industrial water application



Power plant



Sea water desalination



Water treatment



Water supply and drainage



HAVC



Food and drug



Water transport





i:

[illegible]

unit

[illegible]

iv

vířivky: GB, TÜV CE, ISO 9001,
ADWO-2000, TS, PED, WRC WRAS, KTW, API 6D, API609

VI 000000000000: 000000000000, 00000000, 000000000000, 000000000000, 000000000000, 000000000000, 00000000 / 00000000 / 000000000000000000, 00000000000000

COMPANY FACTORY





COMPANY QUALIFICATION





: _____

:

:

問： 如何處理這批被檢出的偽鈔？

Keywords: *actuator, hydraulic, RKSfluid Actuators*

[illegible]

□□□ : □□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□?

[illegible]

□□□ : □□□□□□□□□□□□□□

[illegible]

□□□: **moq**

A: 1pc □□□□□□□□□□□□□□□□□□□□

□□□: □□□□□□□□□□□□□□□□□□□□?

000: 0000000000000000 100% 0000000000000000000000000000 2

[illegible]

□□□□□□□□ TUV, API, WRAS, CE, □□□□□□□□ ISO

□□□□□□□□□□□□□□□□ DIN, ASME, BS EN, JIS, API, AWWA

QUESTION:

	RKSfluid	20	R&D	70
--	----------	----	-----	----

[illegible]