



Float Valve 係指一種利用浮球原理來控制液面高度之閥門。其構造簡單，操作方便，且能自動控制液面高度，防止溢流。常見於水池、水箱、鍋爐等場所。其工作原理為：當液面高度上升時，浮球會隨液面上升，並通過連桿機構推動閥門關閉，防止液面繼續上升。反之，當液面高度下降時，浮球會隨液面下降，並通過連桿機構推動閥門打開，使液面回升。因此，Float Valve 是一種非常實用且可靠之液面控制裝置。

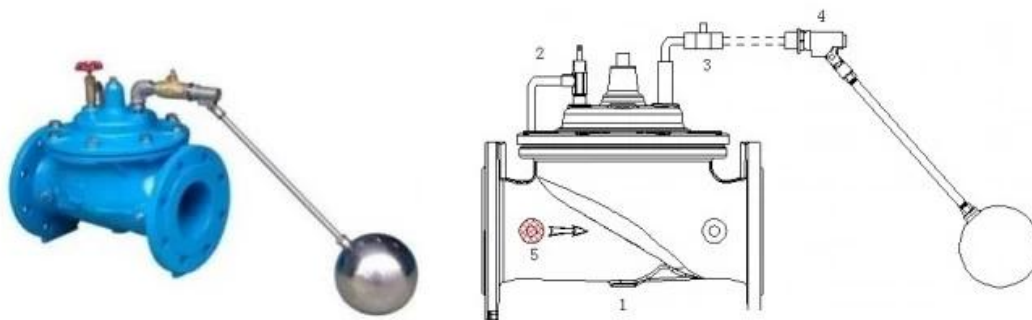

1. 閥體 2. 排水口 3. 排水管 4. 浮球 5. 浮球閥組

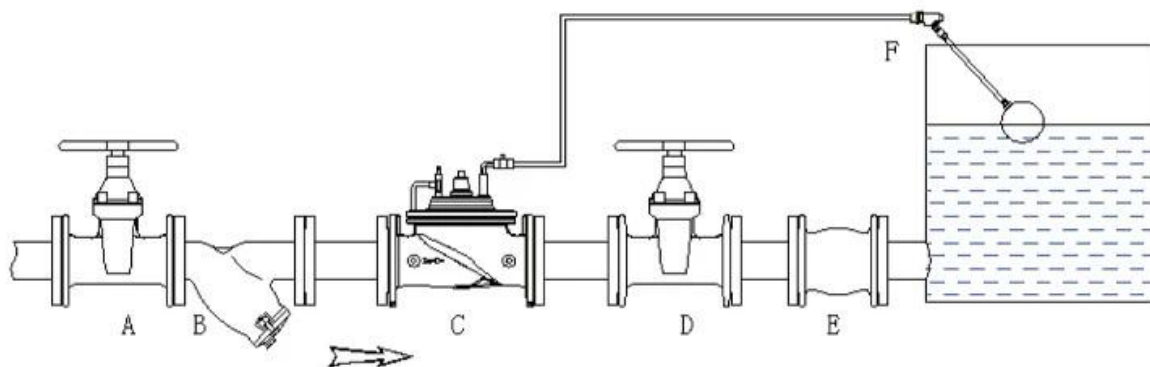

A. 閥門 B.Y C. 浮球閥組 D. 浮球 E. 浮球閥組 F. 水箱

產品規格及安裝說明

1. 產品規格及安裝說明
2. 產品規格及安裝說明 EN-GJS-500-7
3. CF8/SUS304 材料規格及安裝說明;
4. 產品規格及安裝說明 EPDM 材料規格及安裝說明
5. 產品規格及安裝說明 WRAS;
6. PN10/16/25

口径	重量	重量	重量1	重量	重量	重量	重量1
40	230	139	85	250	730	476	205
50	230	139	85	300	850	526	232
65	290	159	95	350	980	585	262
80	310	179	102	400	1100	624	292
100	350	214	112	500	1250	720	360
125	400	278	127	600	1450	835	424
150	480	233	145	800	1850	1110	515
200	600	407	172	1,000	2250	1350	630

备注:

1. 本系列阀门适用于各种工业管道系统，工作压力范围 0.2 ~ 10 MPa。
2. 本系列阀门适用于各种工业管道系统，工作压力范围 0.2 ~ 10 MPa。
3. 本系列阀门适用于各种工业管道系统，工作压力范围 0.2 ~ 10 MPa。
4. 本系列阀门适用于各种工业管道系统，工作压力范围 0.2 ~ 10 MPa。
5. 本系列阀门 (FB), 本系列阀门 (RB) 适用于各种工业管道系统 (ACD) 6 英寸及以下口径。
- 6.1 本系列阀门工作压力 : $1.1 * PN 1 \text{ Bar}$
- 6.2 本系列阀门工作压力 : $1.5 * PN 1 \text{ Bar}$
- 6.3 本系列阀门工作压力 : 0.2 MPa
7. 本系列阀门适用于各种工业管道系统，工作压力范围 1000 Hz。
8. 本系列阀门适用于各种工业管道系统，工作压力范围 9. 本系列阀门适用于各种工业管道系统，工作压力范围 0.2 ~ 10 MPa。





1. 姓名: _____ 性别: _____ 年龄: _____ 职业: _____

II □□□□□□□□□□□□□□□□□□□□□□□□ □□□□□□□□□□□□□□□□ □□□□□□□□□□□□
□□□□□□□ □□□□□□□□□□□□□□□□ □□□□□□□□□□□□

[illegible][illegible]

V 认证: GB, 认证, TUV CE, ISO 9001, ADWO-2000, TS, PED, WRC WRAS, KTW, API 6D, API609

[illegible]

COMPANY FACTORY



01

21 years of professional experience

03

Independent research and development team
28 top senior professional researchers

05

100% high level ex-factory inspection

07

2 years quality assurance, repair and replacement

4 factories

02

2 professional testing centers

04

High quality imported materials

06

COMPANY QUALIFICATION



COMPANY EXHIBITION



Partners



Delivery



Payment



Q: How long is the lead time?

A: The lead time depends on the quantity and the configuration of the product.

Q: What is the payment method?

A: We accept T/T, L/C, and Western Union.

Q: What is the warranty period?

A: We provide a 1-year warranty.

Q: What is the RKSfluid product?

A: RKSfluid is a hydraulic fluid.

Q: What is the viscosity of RKSfluid?

A: The viscosity is 100 cSt.

Q: What is the density of RKSfluid?

A: The density is 0.88 g/cm³.

Q: What is the ISO 15381 certification?

A: ISO 15381 is a standard for hydraulic fluids.

Q: What is the API certification?

A: API certification is a standard for hydraulic fluids.

A: RKSfluid 20 R&D 70
 20 R&D 70