

RKSfluid®



WRAS



CE

RKSfluid®



WRAS



CE

RKSfluid®



RKSfluid®



RKSfluid®



RKSfluid®



WRAS  **CE**



Resilient seat butterfly valve

PN10/PN16, ANSI 125LB/150LB,5K/10K

Size:DN25-DN2400

Body:DI CI

Disc: Stainless steel

Seat :EPDM, NBR, Viton

Connection: Wafer, Lug, Flange



Resilient seat butterfly valve

PN10/PN16, ANSI 125LB/150LB,5K/10K

Size:DN25-DN2400

Body:DI CI

Disc: DI+ Nylon

Seat :EPDM, NBR, Viton

Connection: Wafer, Lug, Flange



Resilient seat butterfly valve

PN10/PN16, ANSI 125LB/150LB,5K/10K

Size:DN25-DN2400

Body:DI CI

Disc: Stainless steel

Seat :EPDM, NBR, Viton

Connection: Wafer, Lug, Flange



Resilient seat butterfly valve

PN10/PN16, ANSI 125LB/150LB,5K/10K

Size:DN25-DN2400

Body:DI CI

Disc: Stainless steel

Seat :EPDM, NBR, Viton

Connection: Wafer, Lug, Flange



Double flange resilient seat butterfly valve

PN10/PN16, ANSI 125LB/150LB, 5K/10K

Size:DN50-DN1000

Body:DI CI

Disc: Stainless steel

Seat :EPDM, NBR, Viton

Connection: Flange



Short-neck butterfly valve for petroleum

ANSI 125LB/150LB

Top Flange Standard:ISO5211

Size:2"-12"

Body: DI CI

Disc :Stainless Steel

Seat : EPDM, NBR, Viton

Connection:Wafer, Lug



PTFE Butterfly Valve

BSEN 1092, DIN 2501, ANSI, JIS, AS2129

Size: DN50~DN600

Body: Ductile Iron

Disc: Ductile Iron+PTFE

Seat: PTFE

Connection: Wafer, Lug, Flange



PTFE Butterfly Valve

BSEN 1092, DIN 2501, ANSI, JIS, AS2129

Size: DN50~DN600

Body: Ductile Iron

Disc: Ductile Iron+PTFE

Seat: PTFE

Connection: Wafer, Lug, Flange



PTFE Butterfly Valve

BSEN 1092, DIN 2501, ANSI, JIS, AS2129

Size: DN50~DN600

Body: WCB, CF8, CF8M

Disc: CF8+PTFE, CF8M+PTFE

Seat: PTFE

Connection: Wafer, Lug



PTFE Butterfly Valve

BSEN 1092, DIN 2501, ANSI, JIS, AS2129

Size: DN50~DN600

Body: WCB, CF8, CF8M

Disc: CF8+PTFE, CF8M+PTFE

Seat: PTFE

Connection: Wafer, Lug



PTFE Butterfly Valve

BSEN 1092, DIN 2501, ANSI, JIS, AS2129

Size: DN50~DN600

Body: Ductile Iron

Disc: CF8, CF8M

Seat: PTFE

Connection: Wafer, Lug, Flange



PTFE Butterfly Valve

BSEN 1092, DIN 2501, ANSI, JIS, AS2129

Size: DN50~DN600

Body: WCB

Disc: CF8 +PTFE, CF8 +PFA

Seat: PTFE

Connection: Wafer, Lug, Flange

DESIGN FEATURES

DURABLE

- No-pin connection, 1 pc blow-out proof stem
- DI/CI Nodularity over 95%


ANTI-CORROSION

- Material: Epoxy powder:  , Earth Best!
- Coating Thickness: 200-250µm
- Spraying temp: over 200°C. Doesn't fade, even wipe with diethyl ether

QUALITY STANDARD

- 100% quality test, follow DIN, ASTM, JIS, GB/T, ISO, BS EN, API
- ONLY ONE Manufacturer get CE certification up to DN1800
- 2 years warranty. 15000 times On-off test, 30000 times Destructive experiment



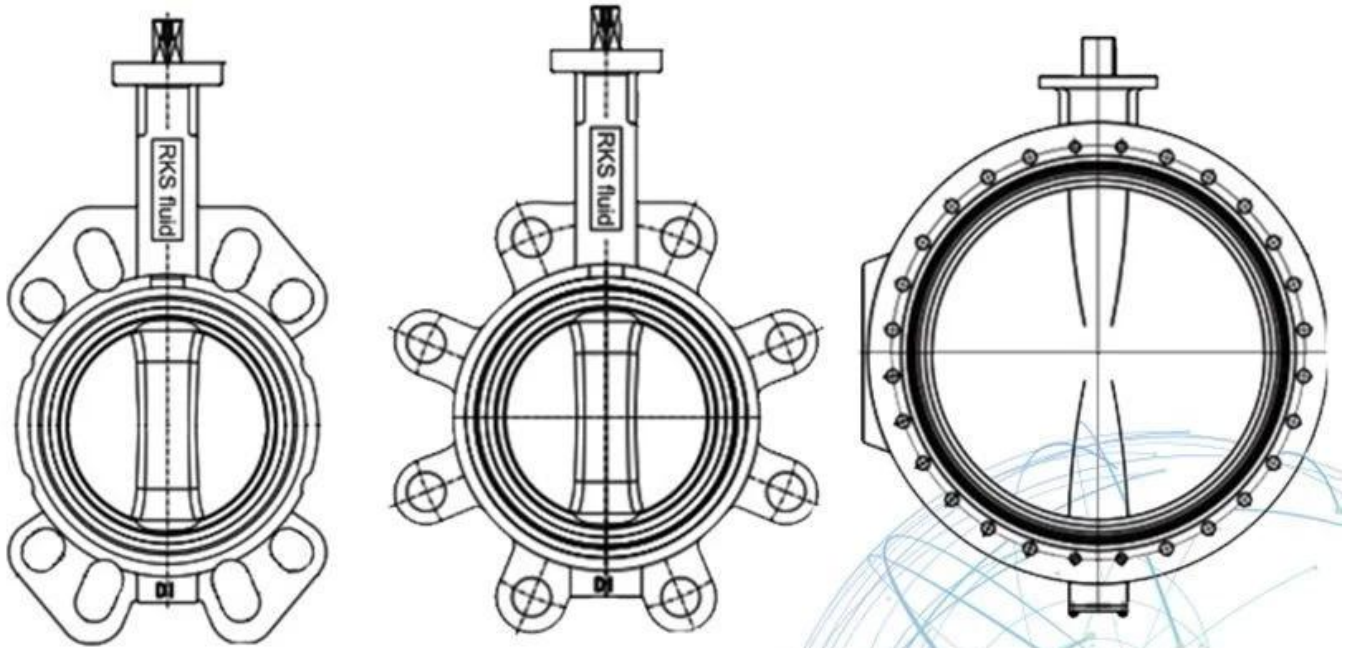

APPLICATION SCENARIO



Industrial water application



Power plant



Sea water desalination



Water treatment



Water supply and drainage



HAVC



Food and drug



Water transport

Our Factory



Exhibition Photos



RKSfluid 自 1997 年以來，一直致力於為全球客戶提供優質的工業設備和服務。

我們擁有先進的生產設備和技術，確保每一台設備都能達到最高的質量標準。我們的產品廣泛應用於石油、化工、電力、冶金等行業。

我們擁有完善的质量管理体系，通过了 ISO 9001 认证。我们还拥有专业的技术团队，为客户提供全方位的技术支持和售后服务。

我們的產品符合 GB 標準，並獲得 TUV 認證。我們的產品已經在多個國際市場上得到了廣泛的認可和應用。

我們擁有完善的质量管理体系，通过了 ISO 9001 认证。我们还拥有专业的技术团队，为客户提供全方位的技术支持和售后服务。

我們的產品符合 GB 標準，並獲得 TUV 認證。我們的產品已經在多個國際市場上得到了廣泛的認可和應用。

我們擁有完善的质量管理体系，通过了 ISO 9001 认证。我们还拥有专业的技术团队，为客户提供全方位的技术支持和售后服务。

我們的產品符合 GB 標準，並獲得 TUV 認證。我們的產品已經在多個國際市場上得到了廣泛的認可和應用。


我們擁有完善的质量管理体系，通过了 ISO 9001 认证。我们还拥有专业的技术团队，为客户提供全方位的技术支持和售后服务。

我們的產品符合 GB 標準，並獲得 TUV 認證。我們的產品已經在多個國際市場上得到了廣泛的認可和應用。

我們擁有完善的质量管理体系，通过了 ISO 9001 认证。我们还拥有专业的技术团队，为客户提供全方位的技术支持和售后服务。

[illegible]

centers

reference 

IV

Standard 认证: GB, ISO 9001, ADWO-2000, TS, PED, WRC WRAS, KTW, API 6D, API609

VI 000000000000: 000000000000, 00000000, 0000000000, 000000000000, 00000000
000, 0000000000, 000000 / 00000000 / 0000000000000000, 000000000000

Our Certificates

