




口径	DN50 - DN300
公称压力	PN6 - PN10 - PN16 (口径 150)
使用温度	-10 °C ~ 100 °C
密封材料	EPDM
适用介质	水, 空气, 油, 蒸汽

APPLICATION SCENARIO

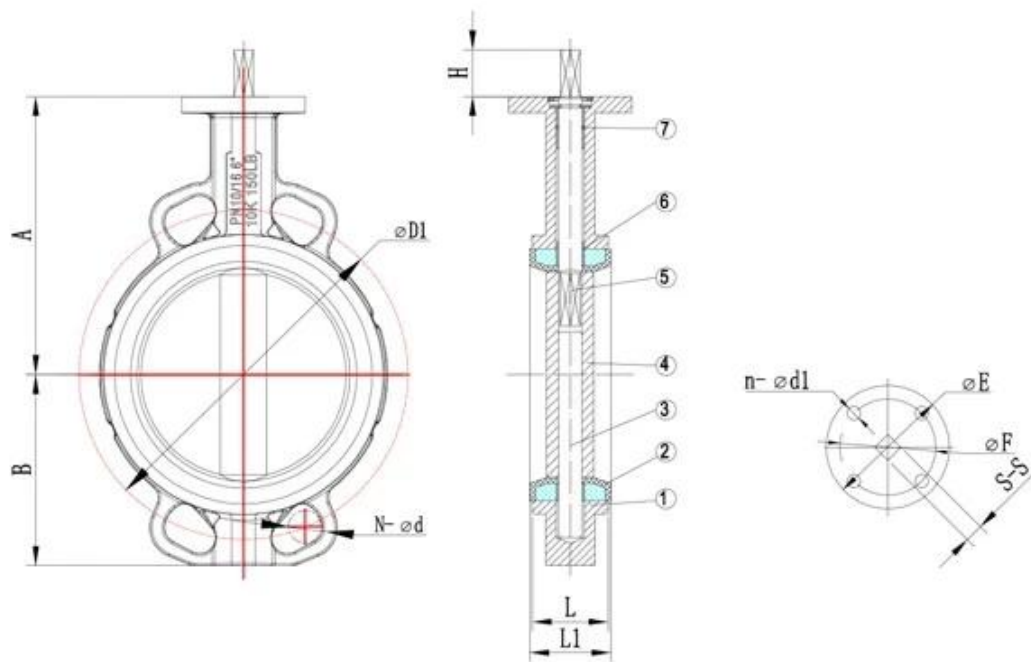

Industrial water application



Power plant



Sea water desalination



Water treatment



Water supply and drainage



HAVC



Food and drug



Water transport



COMPANY INFORMATION



i) 本公司拥有先进的生产设备，采用国际先进的生产工艺，确保产品质量稳定可靠。

ii) 本公司拥有完善的质量管理体系，严格执行 ISO 9001 标准，确保产品质量符合客户要求。

iii) 本公司拥有专业的技术团队，具备丰富的行业经验，能够提供全方位的技术支持和服务。

iv) 本公司拥有完善的销售网络，覆盖全国各大城市，能够快速响应客户需求。

v) 本公司拥有完善的质量管理体系，严格执行 GB, ISO 9001, TUV CE, ADWO-2000, TS, PED, WRC WRAS, KTW, API 6D, API609 标准，确保产品质量符合客户要求。

VI) 本公司拥有完善的质量管理体系，严格执行 GB, ISO 9001, TUV CE, ADWO-2000, TS, PED, WRC WRAS, KTW, API 6D, API609 标准，确保产品质量符合客户要求。



01

21 years of professional
experience

03

Independent research and
development team
28 top senior professional
researchers

05

100% high level ex-factory
inspection

07

2 years quality assurance,
repair and replacement

4 factories

02

2 professional testing
centers

04

High quality imported
materials

06


COMPANY QUALIFICATION



COMPANY EXHIBITION



Partners



[illegible]

Q: 如何安装和配置 RKSfluid？

A: 首先，安装 RKSfluid，然后配置环境变量。RKSfluid 的安装和配置步骤如下：

□□□: □□□□□□□□□□□□□□□□□□□□□□□□□□?

A: RKSfluid 100% 100% 100% 100% 100% 100% 100% 100% 100% 100%

Q: 100% 100%

Q: 100% 100% 100% 100% 100% 100% 100% 100% 100% 100%

Q: **MOQ**

A: 1pc 100% 100% 100% 100%

Q: 100% 100% 100% 100% 100% 100% 100% 100% 100% 100%?

Q: 100% 100% 100% 100% 100% 100% 100% 100% 100% 100%

100% 100% 100% 100% 100% 100% 100% 100% 100% 100%

100% 100% 100% 100% 100% 100% 100% 100% 100% 100%

100% 100% 100% 100% 100% 100% 100% 100% 100% 100%

Q: 100% 100% 100% 100% 100% 100% 100% 100% 100% 100%?

A: RKSfluid 100% 100% 100% 100% 100% 100% 100% 100% 100% 100%

100% 100% 100% 100% 100% 100% 100% 100% 100% 100%