



DESIGN FEATURES

This series of butterfly valves are used for industrial pipelines, as bi-directional open and close and regulation devices, the adjustment range is from 40°C-90°C full open. Suitable temperature $\geq 80^\circ\text{C}$



Features

- Size range DN100-1200mm
- Standard-ISO/BS/DIN/AWWA/API
- Tests Standard-BS EN 12266-1
- Body-Ductile Iron/Cast Iron/Stainless Steel /WCB
- Body Ring-SS420/SS304/SS316
- Disc Ring-EPDM
- Shaft-SS420/SS431/SS316
- Fusion bonded epoxy coating-Min 300 Microns

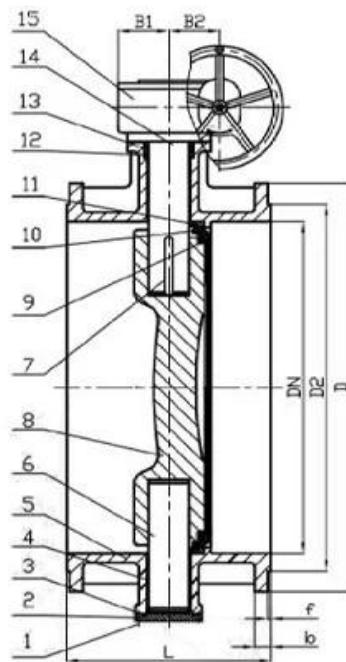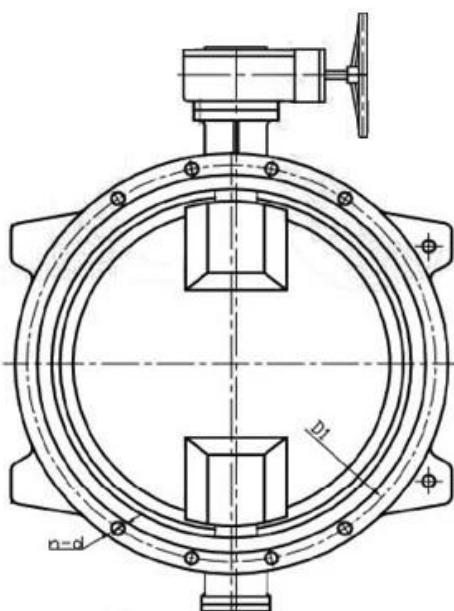

APPLICATION SCENARIO



Industrial water application



Power plant



Sea water desalination



Water treatment



Water supply and drainage



HAVC



Food and drug



Water transport



COMPANY FACTORY



COMPANY INFORMATION



i 企业简介：本公司是一家集科研、生产、销售为一体的现代化企业，

ii 生产设备：本公司拥有CNC车床，数控铣床，数控钻床，数控磨床等高精度生产设备。

iii 质量管理体系：公司通过ISO9001质量管理体系认证，确保产品质量。

iv 售后服务：提供完善的售后服务，确保客户满意。

v 认证证书：GB, CCC, CE, TUV, ISO 9001, ADWO-2000, TS, PED, WRC WRAS, KTW, API 6D, API609

VI 产品优势：本公司拥有先进的生产设备，专业的技术团队，丰富的生产经验，严格的质量控制，完善的售后服务，赢得了客户的广泛好评。

-
- 01** 21 years of professional experience
 - 02** 4 factories
 - 03** Independent research and development team
28 top senior professional researchers
 - 04** 2 professional testing centers
 - 05** 100% high level ex-factory inspection
 - 06** High quality imported materials
 - 07** 2 years quality assurance, repair and replacement

COMPANY QUALIFICATION



COMPANY EXHIBITION



Partners



Delivery



Payment



Product Questions:

Q: What is the function of the RKSfluid Actuator?

A: It is used for the control of valves, pumps, and other industrial equipment.

Q: What is the material of the RKSfluid Actuator?

A: The actuator is made of stainless steel, aluminum, and other materials depending on the specific model.

Q: What is the size of the RKSfluid Actuator?

A: The size of the actuator varies, but it is typically 2 ~ 5 inches in diameter.

Q: What is the MOQ?

A: 1pc

Q: What is the quality guarantee?

A: The quality of the RKSfluid Actuator is guaranteed by a 100% inspection process. It is tested at 2 times its rated pressure and temperature range.

The actuator is certified by TUV, API, WRAS, CE, and ISO.

Other certifications include DIN, ASME, BS EN, JIS, API, AWWA.

ମୁଦ୍ରା: କୌଣସିଲ୍ ପାଇପଲାଇନ୍ସ ଏରିଆର୍ ଅନ୍ତର୍ଜାଲ୍ ମୁଦ୍ରାରୀ ?

ଠିକ୍: RKSfluid ପାଇପଲାଇନ୍ସ ଏରିଆର୍ 20 ମୁଦ୍ରାରୀରେ R&D କେନ୍ଦ୍ର 70 ମୁଦ୍ରାରୀରେ
ମୁଦ୍ରାରୀରେ କୌଣସିଲ୍ ପାଇପଲାଇନ୍ସ ଏରିଆର୍ ମୁଦ୍ରାରୀରେ କୌଣସିଲ୍ ପାଇପଲାଇନ୍ସ ଏରିଆର୍