


# CERBERUS Series

Flow Media -

- Flow Media -
- -
- 
- 
- epoxy  $250\mu\text{m}$
- 
- 

EN1092-2

EN1092-2

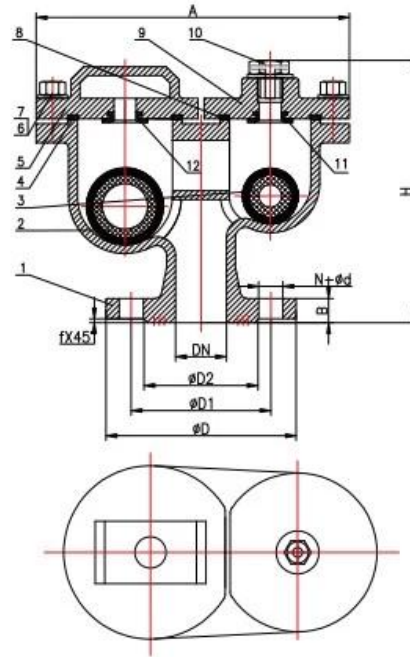



# COMPANY FACTORY



- I [Placeholder]
- II [Placeholder]
- III [Placeholder]

IV 认证体系: GB, ISO 9001, ADWO-2000, TS, PED, WRC WRAS, KTW, API 6D, API609

V 认证体系: GB, ISO 9001, ADWO-2000, TS, PED, WRC WRAS, KTW, API 6D, API609

VI 认证体系: GB, ISO 9001, ADWO-2000, TS, PED, WRC WRAS, KTW, API 6D, API609



## COMPANY QUALIFICATION



## COMPANY EXHIBITION





Q: RKSfluid 的密封性能如何？

A: 密封性能优异。

Q: 密封件的寿命通常为多少？

A: 通常为 2 ~ 5 年。

Q: 1 号密封件适用于哪些场合？

A: 适用于大多数工业场合？

A: 密封件的寿命通常为 100% 的使用寿命，通常为 2 年。

密封件的寿命通常为 100% 的使用寿命，通常为 2 年。

密封件的寿命通常为 100% 的使用寿命，通常为 2 年。

密封件的寿命通常为 100% 的使用寿命，通常为 2 年。

Q: 密封件的寿命通常为多少？

A: RKSfluid 密封件的寿命通常为 27 个月，R&D 密封件的寿命通常为 70 个月。

密封件的寿命通常为 100% 的使用寿命，通常为 2 年。