

DESIGN FEATURES

DURABLE


- No-pin connection, 1 pc blow-out proof stem
- DI/CI Nodularity over 95%

ANTI-CORROSION

- Material: Epoxy powder:  Earth Best!
- Coating Thickness: 200-250µm
- Spraying temp: over 200°C. Doesn't fade, even wipe with diethyl ether

QUALITY STANDARD

- 100% quality test, follow DIN, ASTM, JIS, GB/T, ISO, BS EN, API
- ONLY ONE Manufacturer get CE certification up to DN1800
- 2 years warranty. 15000 times On-off test, 30000 times Destructive experiment

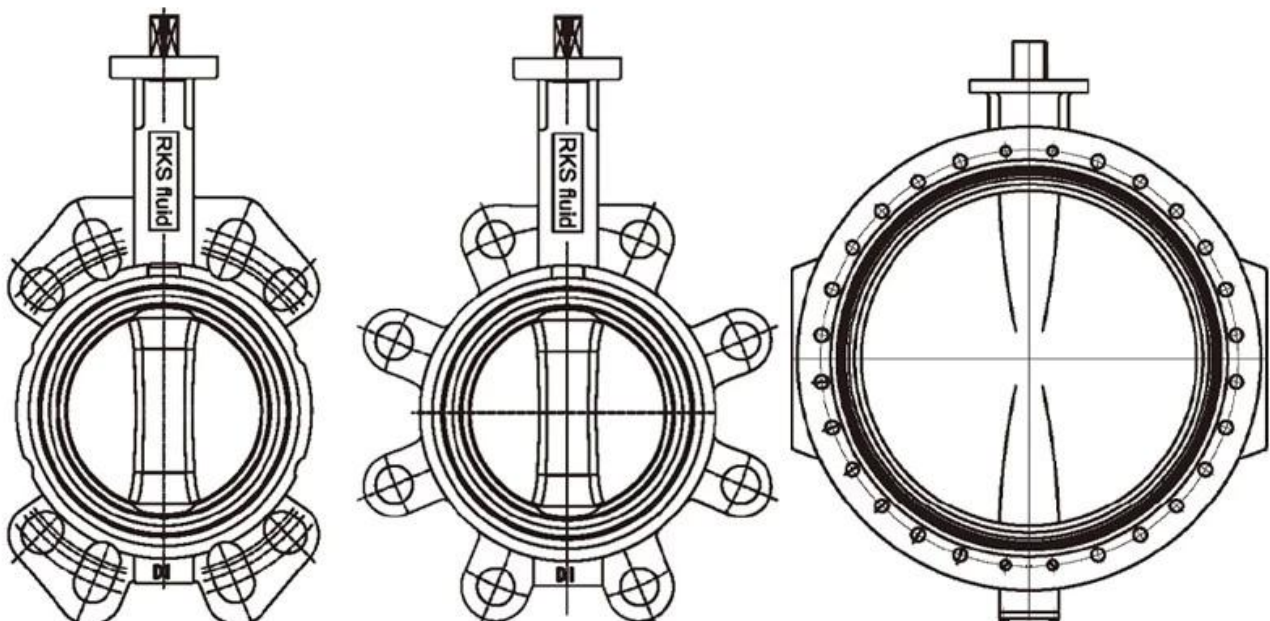

APPLICATION SCENARIO



Industrial water application



Power plant



Sea water desalination



Water treatment



Water supply and drainage



HAVC



Food and drug



Water transport



COMPANY FACTORY



COMPANY INFORMATION



i 本公司拥有先进的生产设备，采用国际先进的生产工艺，确保产品质量稳定可靠。

ii 本公司拥有完善的质量管理体系，通过 ISO 9001 认证，严格执行国家标准，确保产品质量符合客户要求。

unit 本公司拥有专业的技术团队，具备丰富的行业经验，能够提供全方位的技术支持和售后服务。

iv 本公司拥有完善的生产流程，从原材料采购到成品出厂，每个环节都严格把控，确保产品质量。

v 本公司拥有完善的质量管理体系，通过 GB, ISO 9001, TUV CE, ADWO-2000, TS, PED, WRC WRAS, KTW, API 6D, API609 等认证，确保产品质量符合国际标准。

VI 本公司拥有完善的质量管理体系，通过 GB, ISO 9001, TUV CE, ADWO-2000, TS, PED, WRC WRAS, KTW, API 6D, API609 等认证，确保产品质量符合国际标准。



COMPANY QUALIFICATION



[illegible]

□ □ : □ ?

:

□ □ □ : □ ?

000: 00000000, 00000, hrdraulic, 00000000000000 RKSfluid Actuators 000000000000000000
0000000 00000000000000000000000000

□□□ : □□□□□□□□□□□□□□□□□□□□□□□□□?

```

#####: RKSfluid #####

```

□□□: □□□□□□□□□□□□

[illegible]

000: moq	001: movb	010: movw	011: movl	100: movq	101: movh	110: movsbl	111: movswl
-----------------	------------------	------------------	------------------	------------------	------------------	--------------------	--------------------

A: 1pc

□ □ □ □ : □ ?

0000: 0000000000000000 100% 00000000000000000000000000000000 2 00 00000000000000000000000000000000
00000000000000000000

□□□□□□□□ TUV, API, WRAS, CE, □□□□□□□□ ISO

DIN, ASME, BS EN, JIS, API, AWWA

QUESTION:

公司: RKSfluid 公司位于美国加利福尼亚州 20 年来的 R&D 经验 70 名经验丰富的工程师
 和科学家，专注于开发高性能的流体处理系统。