
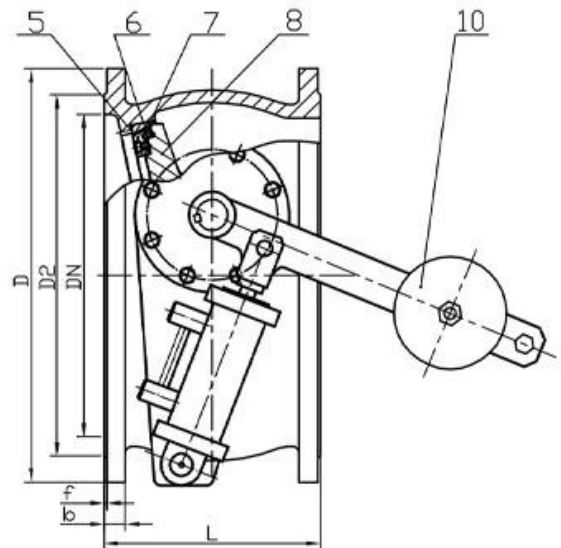


PRODUCT STRUCTURE

Features

- Size range DN100-1200mm
- Standard-ISO/ BS/DIN /AWWA/API
- Tests standard-BS EN 12266-1
- Body-Ductile Iron/Cast Iron/Stainless Steel/WCB
- Body Ring-SS420/SS304/SS316
- Disc Ring-EPDM
- Shaft-420/S5431/SS316
- Fusion bonded epoxy coating- Min 300 Microns

This series tilting check valves are suitable to be used at the exit of the pump whose medium is water. It is used to prevent or reduce medium back from water hammer. So it can protect the pipeline system. Suitable temperature $\leq 80^{\circ}\text{C}$

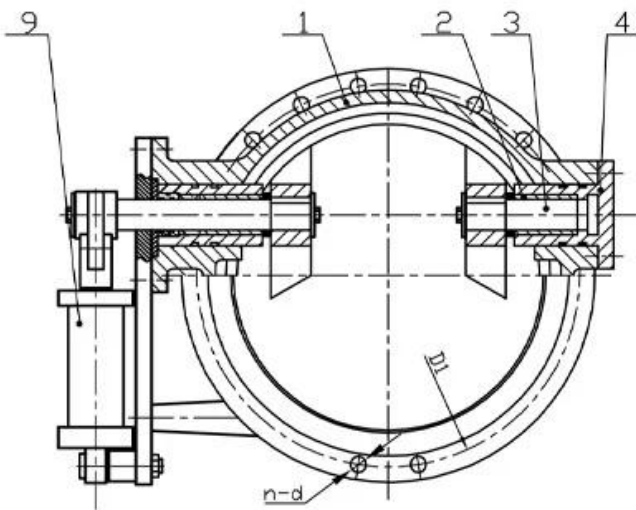

APPLICATION SCENARIO



Industrial water application



Power plant



Sea water desalination



Water treatment



Water supply and drainage



HAVC



Food and drug



Water transport



COMPANY FACTORY



COMPANY INFORMATION



i 本公司拥有先进的生产设备，采用国际先进的生产工艺，确保产品质量稳定可靠。

ii 本公司拥有完善的质量管理体系，通过 ISO 9001 认证，严格执行国家标准，确保产品质量符合客户要求。

unit 本公司拥有专业的技术团队，具备丰富的行业经验，能够提供全方位的技术支持和售后服务。

iv 本公司拥有完善的生产流程，从原材料采购到成品出厂，每个环节都严格把控，确保产品质量。

v 本公司拥有完善的质量管理体系，通过 GB, ISO 9001, TUV CE, ADWO-2000, TS, PED, WRC WRAS, KTW, API 6D, API609 等认证，确保产品质量符合国际标准。

VI 本公司拥有完善的质量管理体系，通过 GB, ISO 9001, TUV CE, ADWO-2000, TS, PED, WRC WRAS, KTW, API 6D, API609 等认证，确保产品质量符合国际标准。

01

21 years of professional
experience

03

Independent research and
development team
28 top senior professional
researchers

05

100% high level ex-factory
inspection

07

2 years quality assurance,
repair and replacement

4 factories

02

2 professional testing
centers

04

High quality imported
materials

06

COMPANY QUALIFICATION



COMPANY EXHIBITION



□ □ □ □ □ □ □ □ □ □ □ □ □ □

□□: □□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□?

[illegible]

□□□ : □□□□□□□□□□□□□□□□□□□□□□□□□□?

0000: 00000000, 000000, hrdraulic, 0000000000000000 RKSfluid Actuators 000000000000000000
 00000000 0000000000000000000000000000000000

□□□: □□□□□□□□□□□□□□□□□□□□□□□□□□?

```
0000: RKSfluid 0000000000000000000000000000000000000000000000000000000
```

□□□: □□□□□□□□□□□□□□

[illegible]

000:	moq
------	-----

[illegible]

□□□□ : □□□□□□□□□□□□□□□□□□□□□□□□□□□□?

0000: 0000000000000000 100% 00000000000000000000000000000000 2 00 00000000000000000000000000000000
00000000000000000000

□□□□□□□□ TUV, API, WRAS, CE, □□□□□□□□ ISO

□□□□□□□□□□□□□□□□ DIN, ASME, BS EN, JIS, API, AWWA

[illegible][illegible]