


[illegible]

2. 24

口径	DN200-DN1800
密封面形式	PN10 PN16 PN25 PN40
公称压力	0.6MPa-10MPa
适用介质温度范围	≤80° C
符合标准	EN 593 国标 EN1074-1/2
产品系列	EN558 Series 13 国标 Series 14
应用场合	适用于水、蒸汽、HVAC、空气、油、酸、碱、氨、尿素、甲醇、乙醇、丙酮、丁酮、氯气、氮气、氧气、氢气、氩气、氦气、氟气、二氧化碳、一氧化碳、天然气、液化石油气、工业气体等。

APPLICATION SCENARIO

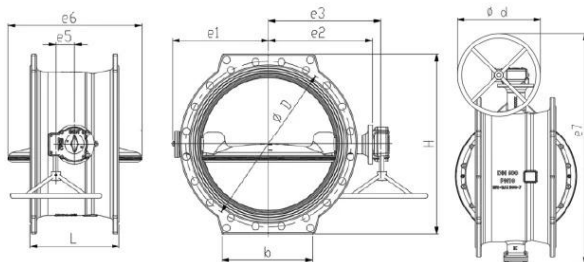

Industrial water application



Power plant



Sea water desalination



Water treatment



Water supply and drainage



HAVC



Food and drug



Water transport



COMPANY FACTORY



COMPANY INFORMATION



i 本公司拥有完善的质量管理体系，通过了 ISO 9001 认证，确保产品质量稳定可靠。

ii 本公司拥有先进的 CNC 加工设备，能够满足各种复杂零件的加工需求，加工精度高，交货周期短。

iii 本公司拥有专业的技术团队，能够提供从产品设计到生产的全过程服务，确保客户满意。

iv 本公司拥有完善的安全管理体系，通过了 ISO 14001 认证，确保生产过程安全可靠。

v 本公司拥有完善的产品认证体系，通过了 GB, ADWO-2000, TS, PED, WRC WRAS, KTW, API 6D, API609 等认证。

VI 本公司拥有完善的产品展示平台，能够提供从产品设计到生产的全过程服务，确保客户满意。

01

21 years of professional experience

03

Independent research and development team
28 top senior professional researchers

05

100% high level ex-factory inspection

07

2 years quality assurance, repair and replacement

4 factories

02

2 professional testing centers

04

High quality imported materials

06

COMPANY QUALIFICATION



COMPANY EXHIBITION



Partners



Q: RKSfluid 27 R&D 70

A: RKSfluid 27 R&D 70