Air Release valve

Size range:DN25-DN300

Pressure ratings:PN10 PN16

Body:Ductile Iron

Trim:SS304 SS316 etc

Connection:ARVS/KARS-BPT threaded, KARX-Flanged

Working temperature: -10℃~+80℃

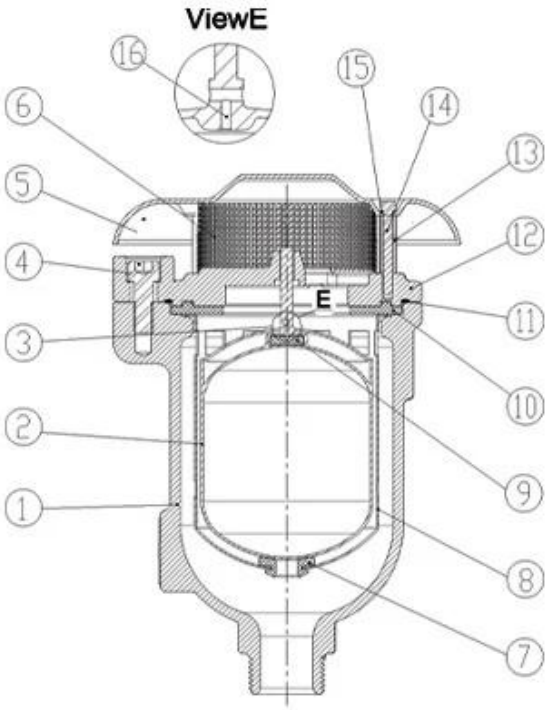

DN25-DN50

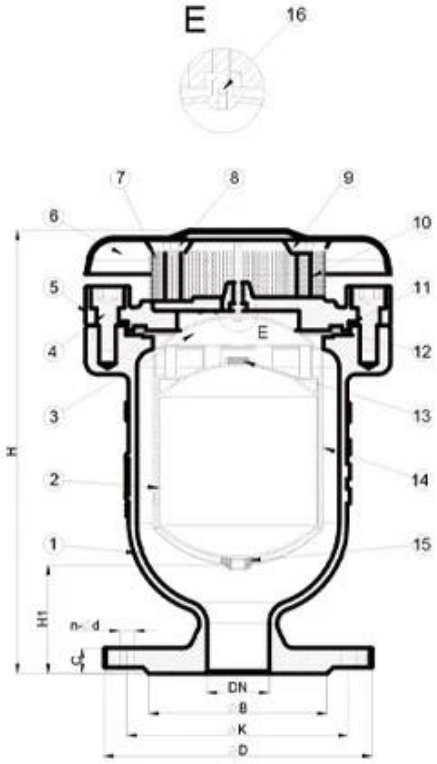

DN50-DN300

□□□□□□□□□:

1. □□□□□□□□□□

□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□ 5.com □□□□□ BS EN 1074-4

COMPANY INFORMATION

RKSfluid □□□□□□□□□□□□□□□□□□ 1997
□□□□□□□□□□□□□□□□□□□

□□□

COMPANY QUALIFICATION

COMPANY EXHIBITION

Partners
TALIS
GEMÜ
WATTS
Bray
hawle
amri
BAYARD
AVK
EBRO
KEYSTONE
EMERSON
GIBSON
CAMERON
CMO VALVES
SWISS fluid
SAINT-GOBAIN
KSB
tyco
TTV
SAPAG
haike

Delivery
ups
XDL
FedEx Express
EMS
TNT
DHL
Payment
PayPal
WESTERN UNION
VISA
ESCROW
MasterCard
HSBC

□□□□□□□□□□□□□□□□:

□□□: □□□□□□□□□□□□□□□□□

A: □□, □□□□□, hrdraulic, □□□□□□□□□□□□□□□RKSfluid Actuators
□□□□□□□□□□□□□□