


# RKSfluid®

Proven Technology-Superior Features-Legendary Value



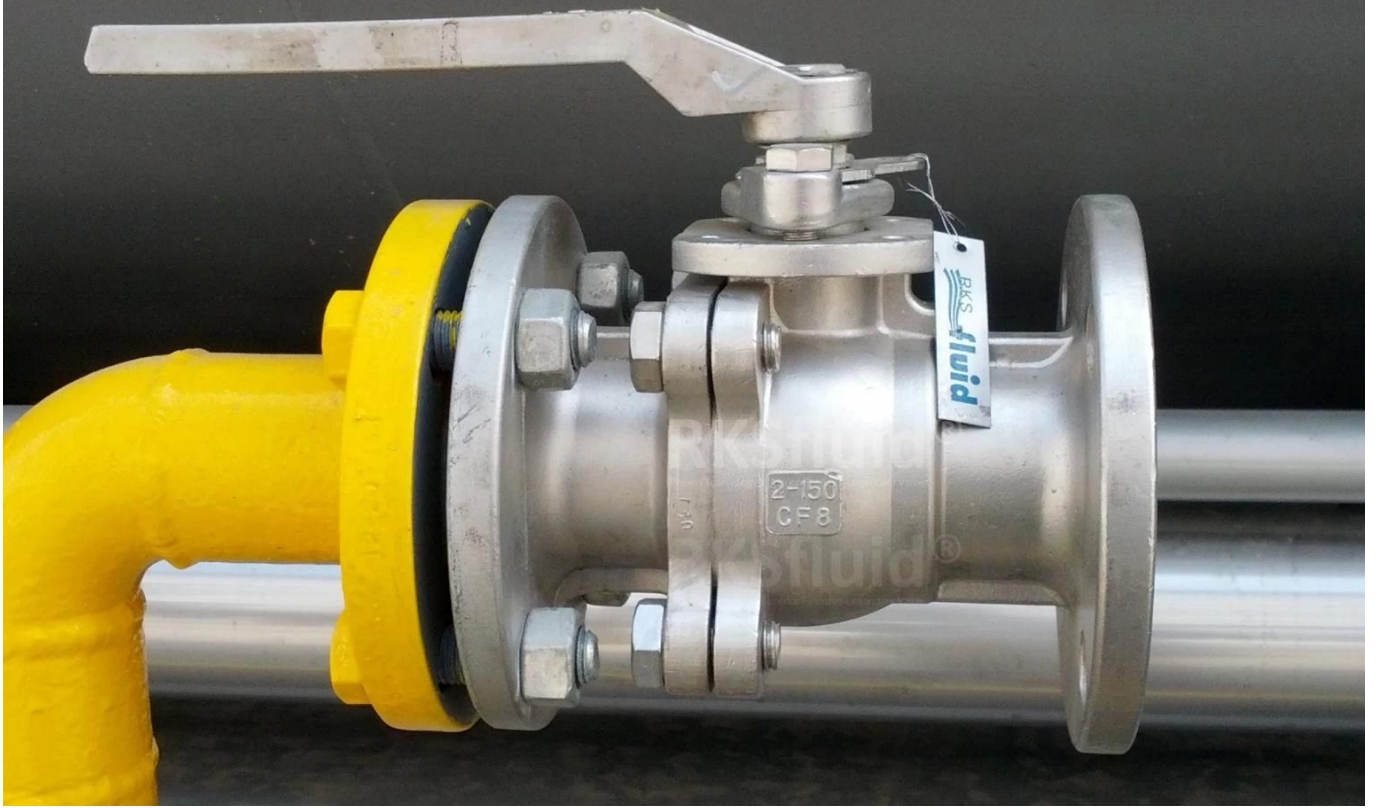

Top View

Side View



Temperature:

Temperature range: -20°C ~ +180 °C

Material: WCB / CF8 / CF8M / CF3 / CF3M

End connections: Flange / Thread / Weld / Customized

Weight: 150LB-600LB

Size: 1/2 " ~ 12" (DN15-DN300)





## Partners





PTFE lined butterfly valve



Resilient seat butterfly valve




Double offset butterfly valve



Triple offset butterfly valve



Ball valve



Pipe fittings

## Our Factory



## Company Advantages

01

21 years of professional experience

03

Independent research and development team  
28 top senior professional researchers

05

100% high level ex-factory inspection

07

2 years quality assurance, repair and replacement

4 factories

02

2 professional testing centers

04

High quality imported materials

06



|||||

|||

|||

#### IV

V: GB, TUV CE, ISO 9001, ADWO-2000, TS, PED, WRC WRAS, KTW, API 6D, API609

actuators, actuators, actuators, actuators, actuators, actuators, actuators, actuators / actuators / actuators actuators, actuators

### Exhibition Photos







TUV, API, WRAS, CE, ISO  
DIN, ASME, BS EN, JIS, API, AWWA

A: RKSfluid 20 R&D 70