

DESIGN FEATURES

DURABLE




- No-pin connection, 1 pc blow-out proof stem
- DI/CI Nodularity over 95%

ANTI-CORROSION



- Material: Epoxy powder:  , Earth Best!
- Coating Thickness: 200-250µm
- Spraying temp: over 200°C. Doesn't fade, even wipe with diethyl ether

QUALITY STANDARD


- 100% quality test, follow DIN, ASTM, JIS, GB/T, ISO, BS EN, API
- ONLY ONE Manufacturer get CE certification up to DN1800
- 2 years warranty. 15000 times On-off test, 30000 times Destructive experiment

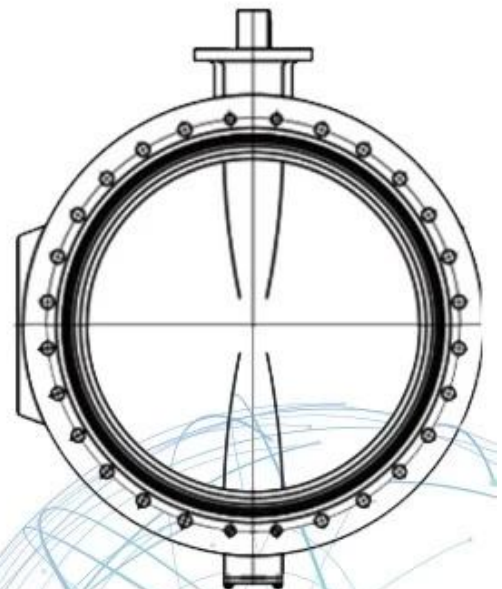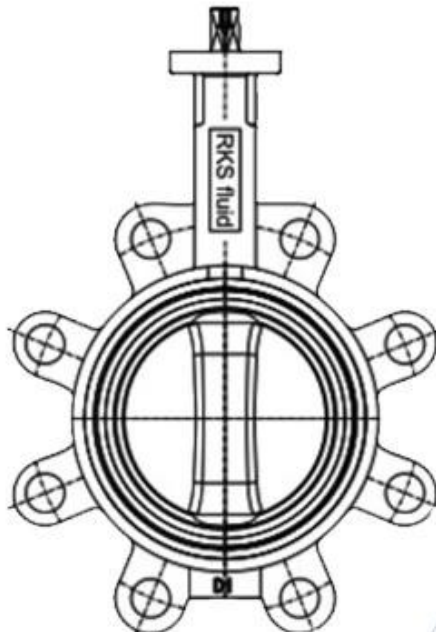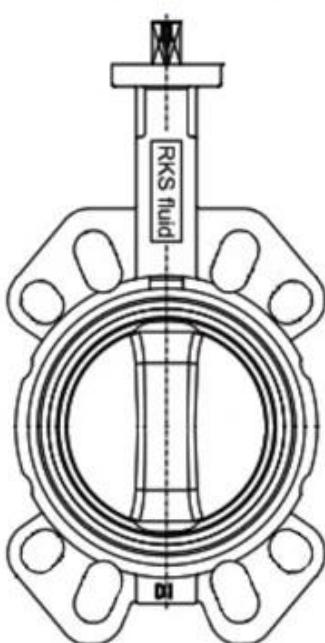


口径	DN32 - DN2400 (NPS1 1/4-NPS96)
公称压力	PN6 - PN10 - PN16 (Class 150)
使用温度	-10°C-80°C
密封材料	聚四氟乙烯, 金属密封
适用介质	NBR, EPDM, 海水, 工业用水, 蒸汽

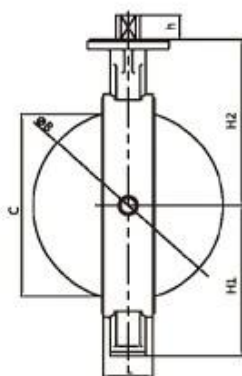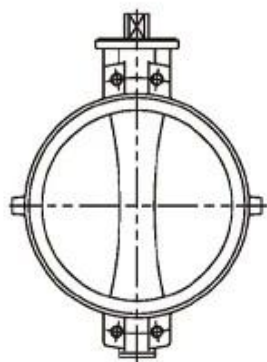

WAFER



LUG



NPS14-NPS40 Wafer/Lug with alignment holes

Size	L	H1	H2	h	A	ΦB	C	ΦG	a	b	ΦD	n-Φd	ISO5211
NPS14	3.07	10.63	11.81	1.42	1.06	Φ13.31	12.95	-	-	-	Φ4.92	4-Φ0.55	F12
NPS16	4.02	11.81	13.58	1.69	1.26	Φ15.35	14.80	-	-	-	Φ5.50	4-Φ0.71	F14
NPS18	4.49	12.99	14.76	1.93	4.42	Φ17.20	16.61	-	-	-	Φ5.50	4-Φ0.71	F14
NPS20	5.00	15.16	16.73	2.56	-	Φ19.09	18.43	Φ2.36	0.71	2.52	Φ6.50	4-Φ0.87	F16
NPS24	6.06	17.24	19.49	2.76	-	Φ23.03	22.24	Φ2.36	0.71	2.52	Φ6.50	4-Φ0.87	F16
NPS28	6.50	20.39	22.44	3.15	-	Φ26.77	25.98	Φ2.76	0.79	2.93	Φ10.00	8-Φ0.71	F25
NPS30	6.50	21.46	24.02	3.15	-	Φ28.74	27.95	Φ2.76	0.79	2.93	Φ10.00	8-Φ0.71	F25
NPS32	7.48	22.32	25.20	3.15	-	Φ30.43	29.49	Φ2.76	0.79	2.93	Φ10.00	8-Φ0.71	F25
NPS36	7.99	25.59	27.56	3.94	-	Φ34.49	33.54	Φ3.15	0.87	3.35	Φ10.00	8-Φ0.71	F25
NPS40	8.50	28.15	29.53	3.94	-	Φ38.43	37.48	Φ3.15	0.87	3.35	Φ11.73	8-Φ0.87	F30

APPLICATION SCENARIO



Industrial water application



Power plant



Sea water desalination



Water treatment



Water supply and drainage



HAVC



Food and drug



Water transport





01

21 years of professional experience

03

Independent research and development team
28 top senior professional researchers

05

100% high level ex-factory inspection

07

2 years quality assurance, repair and replacement

4 factories

02

2 professional testing centers

04

High quality imported materials

06


COMPANY QUALIFICATION



COMPANY EXHIBITION



Partners



0000: 0000000000000000 0000000000000000
 0000: 000000000000 00000000 00000000 00000000 000000000000

0000: 00000000000000000000000000000000 0000000000000000?
 0000: 00000000, 00000, Hrdraulic, 00000000000000 RKSfluid 00000000000000000000000000000000
 00000000000000000000000000000000

□□□ : □□□□□□□□□□□□□□□□□□□□□□□□?

Q: RKSfluid 製品はどのような用途に使用されますか？

A: 主に工業用流体の制御に使用されます。

Q: 製品のサイズはどのくらいありますか？

A: 標準サイズは 2 ~ 5 mm です。

Q: 1 台あたりの価格はいくらですか？

A: 製品は現在市場に出回っておりません。

A: 製品の品質は 100% 保証されています。2 年間の保証期間があります。

製品の品質は 100% 保証されています。2 年間の保証期間があります。

製品の品質は 100% 保証されています。2 年間の保証期間があります。

製品の品質は 100% 保証されています。2 年間の保証期間があります。

Q: 製品の仕様はどのようなものがありますか？

A: RKSfluid 製品は現在市場に出回っておりません。27 年間の R&D 期間を経て 70 以上の製品を開発しています。

製品の品質は 100% 保証されています。2 年間の保証期間があります。