

DESIGN FEATURES

DURABLE




- No-pin connection, 1 pc blow-out proof stem
- DI/CI Nodularity over 95%

ANTI-CORROSION

- Material: Epoxy powder:  , Earth Best!
- Coating Thickness: 200-250µm
- Spraying temp: over 200°C. Doesn't fade, even wipe with diethyl ether

QUALITY STANDARD



- 100% quality test, follow DIN, ASTM, JIS, GB/T, ISO, BS EN, API
- ONLY ONE Manufacturer get CE certification up to DN1800
- 2 years warranty. 15000 times On-off test, 30000 times Destructive experiment

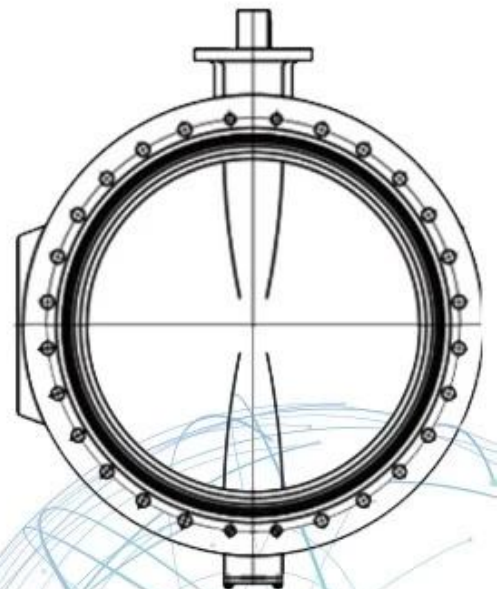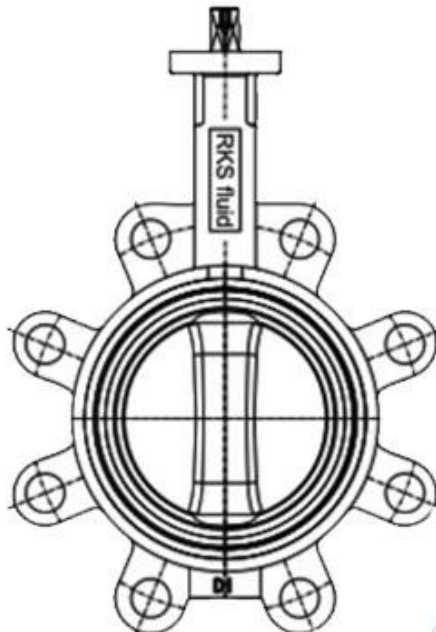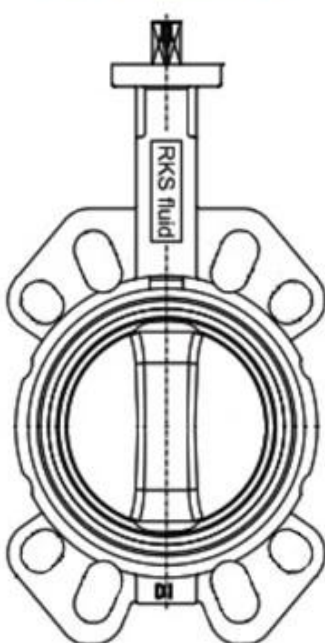



□□□□	DN32 - DN2400 (NPS1 1/4 -NPS96)
□□□□□□□□□□	PN6 - PN10 - PN16 (□□□□ 150)
□□□□□□□□□□	-10 °C-80 °C
□□□□□	□□□□□□□□□□□□□□ □□□
□□□□□□□□□□	NBR, EPDM, □□□□□□□□□□, □□□□□□□, Viton

□□□□□□□□□□


□□□□□□, lug, u-section, double flange

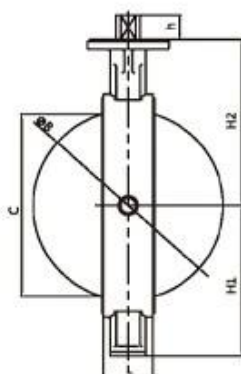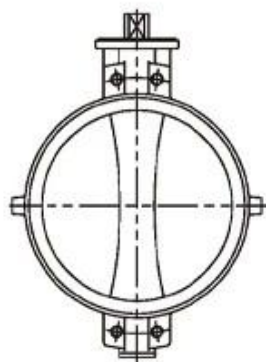

WAFER



LUG



NPS14-NPS40 Wafer/Lug with alignment holes

Size	L	H1	H2	h	A	ΦB	C	ΦG	a	b	ΦD	n-Φd	IS05211
NPS14	3.07	10.63	11.81	1.42	1.06	Φ13.31	12.95	-	-	-	Φ4.92	4-Φ0.55	F12
NPS16	4.02	11.81	13.58	1.69	1.26	Φ15.35	14.80	-	-	-	Φ5.50	4-Φ0.71	F14
NPS18	4.49	12.99	14.76	1.93	4.42	Φ17.20	16.61	-	-	-	Φ5.50	4-Φ0.71	F14
NPS20	5.00	15.16	16.73	2.56	-	Φ19.09	18.43	Φ2.36	0.71	2.52	Φ6.50	4-Φ0.87	F16
NPS24	6.06	17.24	19.49	2.76	-	Φ23.03	22.24	Φ2.36	0.71	2.52	Φ6.50	4-Φ0.87	F16
NPS28	6.50	20.39	22.44	3.15	-	Φ26.77	25.98	Φ2.76	0.79	2.93	Φ10.00	8-Φ0.71	F25
NPS30	6.50	21.46	24.02	3.15	-	Φ28.74	27.95	Φ2.76	0.79	2.93	Φ10.00	8-Φ0.71	F25
NPS32	7.48	22.32	25.20	3.15	-	Φ30.43	29.49	Φ2.76	0.79	2.93	Φ10.00	8-Φ0.71	F25
NPS36	7.99	25.59	27.56	3.94	-	Φ34.49	33.54	Φ3.15	0.87	3.35	Φ10.00	8-Φ0.71	F25
NPS40	8.50	28.15	29.53	3.94	-	Φ38.43	37.48	Φ3.15	0.87	3.35	Φ11.73	8-Φ0.87	F30

APPLICATION SCENARIO



Industrial water application



Power plant



Sea water desalination



Water treatment



Water supply and drainage



HAVC



Food and drug



Water transport



COMPANY INFORMATION



i) 本公司擁有先進的生產設備和技術，能夠生產各種規格、品種的鋼管，並具有完善的質量保證體系。

ii) 本公司擁有先進的 CNC 加工設備，能夠生產各種規格、品種的鋼管，並具有完善的質量保證體系，並具有完善的質量保證體系。

iii) 本公司擁有先進的生產設備和技術，能夠生產各種規格、品種的鋼管，並具有完善的質量保證體系。

iv) 本公司擁有先進的生產設備和技術，能夠生產各種規格、品種的鋼管，並具有完善的質量保證體系。

v) 本公司擁有先進的生產設備和技術，能夠生產各種規格、品種的鋼管，並具有完善的質量保證體系，GB, 鋼管生產標準, 鋼管生產標準, TUV CE, ISO 9001, ADWO-2000, TS, PED, WRC WRAS, KTW, API 6D, API609

VI 本公司擁有先進的生產設備和技術，能夠生產各種規格、品種的鋼管，並具有完善的質量保證體系，鋼管生產標準, 鋼管生產標準, 鋼管生產標準, 鋼管生產標準, 鋼管生產標準, 鋼管生產標準 / 鋼管生產標準 / 鋼管生產標準, 鋼管生產標準



01

21 years of professional
experience

03

Independent research and
development team
28 top senior professional
researchers

05

100% high level ex-factory
inspection

07

2 years quality assurance,
repair and replacement

4 factories

02

2 professional testing
centers

04

High quality imported
materials

06


COMPANY QUALIFICATION



COMPANY EXHIBITION



Partners

[illegible]

問: 如何實現一個基於 RKSfluid 的流體動力學模型？

[illegible]

A: RKSfluid 100% 100% 100% 100% 100% 100% 100% 100% 100% 100%

Q: 100% 100%

Q: 100% 100% 100% 100% 100% 100% 100% 100% 100% 100%

Q: **MOQ**

A: 1pc 100% 100% 100% 100%

Q: 100% 100% 100% 100% 100% 100% 100% 100% 100% 100%?

Q: 100% 100% 100% 100% 100% 100% 100% 100% 100% 100%

100% 100% 100% 100% 100% 100% 100% 100% 100% 100%

100% 100% 100% 100% 100% 100% 100% 100% 100% 100%

100% 100% 100% 100% 100% 100% 100% 100% 100% 100%

Q: 100% 100% 100% 100% 100% 100% 100% 100% 100% 100%?

A: RKSfluid 100% 100% 100% 100% 100% 100% 100% 100% 100% 100%

100% 100% 100% 100% 100% 100% 100% 100% 100% 100%