


[illegible]

□□□□□□	□□□□□ C515
□□□□□□□□	ASME B16.1/16.42
□□□□□□□□□□□□	□□□□□□□□□□□□□□□□ 5153
□□□□□□□□	EN12266
□□□□□□□□□□□□	□□□□□□□□□□□□□□□□□□□□□□
□□□□□□□□	□□□□
□□□□□□□□□□	0-80 °C
□□□□□□□□□□□□	11/18□□□□
□□□□□□□□□□□□□□□□	15/24□□□□
□□.□□□□	10/16□□□□
□□□□□□□	DN40-DN400



APPLICATION SCENARIO

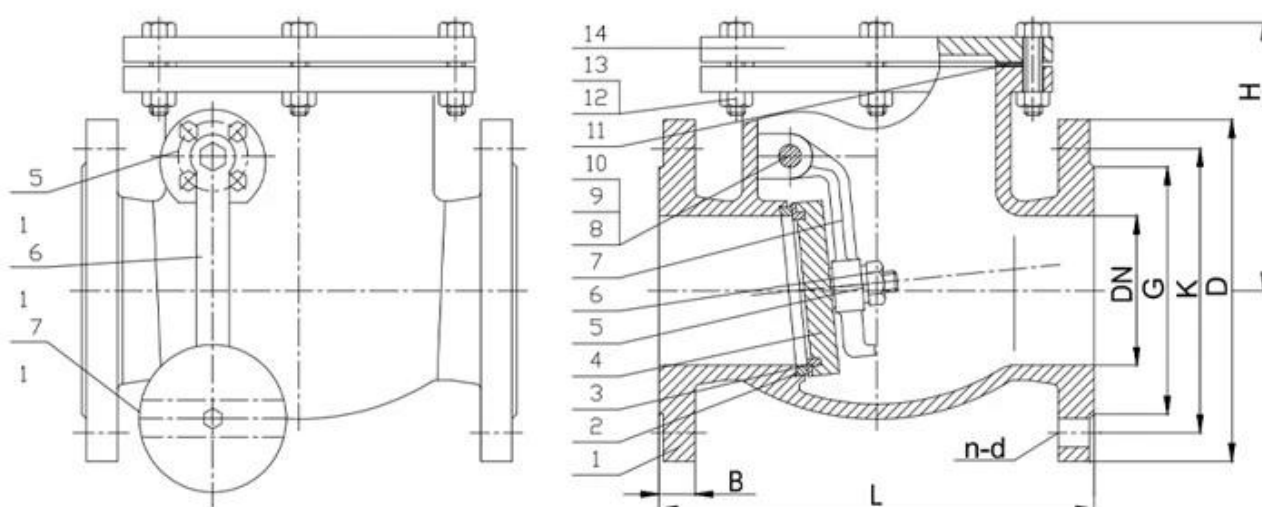

Industrial water application



Power plant



Sea water desalination



Water treatment



Water supply and drainage



HAVC



Food and drug



Water transport



RKSfluid

Proven Technology-Superior Features-Legendary Value



RKSfluid

Proven Technology-Superior Features-Legendary Value



RKSfluid

Proven Technology-Superior Features-Legendary Value



RKSfluid

Proven Technology-Superior Features-Legendary Value



I 0000000000: 00000000000000000000 00000000 00000000000000000000000000000000

II □□□□□□□□□□□□□□□□□□□□ □□□□□□□□□□□□□□□□□□□□ □□□□□□□□□□□□□□□□□□□□
□□□□□□□□□□□□□□□□ □□□□□□□□□□□□

[illegible][illegible]

V 认证: GB, 认证, TUV CE, ISO 9001, ADWO-2000, TS, PED, WRC WRAS, KTW, API 6D, API609

[illegible]



COMPANY EXHIBITION



COMPANY QUALIFICATION



Partners





Q: RKSfluid 27 R&D 70

