





- Streamlined, minimum noise
- Backflow velocity only 0.2s, Head loss 0.1bar with 2m/s
- EPDM/NBR Rubber fully coated disc
- Anti-erosion design, Self-adjusting ball
- Self-cleaning stem, Long time smooth operation

Engineering Projects

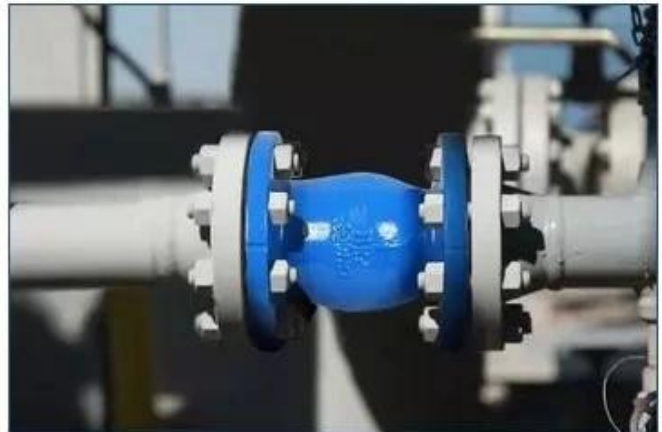

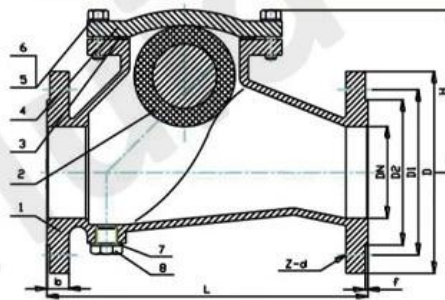


Ball Check Valve, Flange

ITEM	PART NAME	MATERIAL
1	Body	Ductile iron
2	Ball	NBR
3	Gasket	NBR
4	Body	Ductile iron
5	Bolt	SS304
6	Washer	SS304
7	Washer	Nylon
8	Plug	SS304

SIZE	DIN 3202 F6	Flange dimension(EN 1092-2) PN10/PN16		
DN	L	D	K	n-d
DN40/1.5"	180	150	110	4-ø19
DN50/2"	200	165	125	4-ø19
DN65/2.5"	240	185	145	4-ø19
DN80/3"	260	200	160	8-ø19
DN100/4"	300	220	180	8-ø19
DN125/5"	350	250	210	8-ø19
DN150/6"	400	285	240	8-ø23
DN200/8"	500	340	295/295	8-ø23/12-ø23
DN250/10"	600	405	350/355	12-ø23/12-ø28
DN300/12"	700	460	400/410	12-ø23/12-ø28
DN400/16"	900	580	515/525	16-ø28/16-ø31
DNS00/20"	1100	715	620/650	20-ø28/20-ø34

Product Display

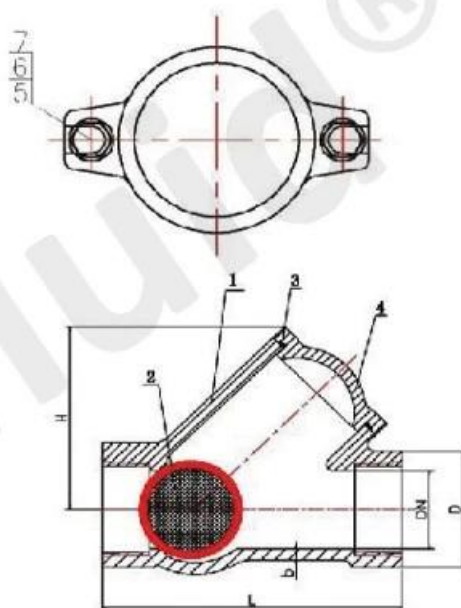

Ball Check Valve, Threaded

ITEM	PART NAME	MATERIAL
1	Body	Ductile iron
2	Ball	NBR
3	O-Ring	NBR
4	Cover	Ductile iron
5	Gasket	SS304

SIZE	DIN 3202 F6	Flange dimension(EN 1092-2) PN10/PN16		
DN	L	D	H	B
DN25	135	50	75	6
DN32	135	50	75	6
DN40	145	60	93	6
DN50	175	72	106	7
DN65	200	90	131	7

Company Advantages

01

21 years of professional experience

03

Independent research and development team
28 top senior professional researchers

05

100% high level ex-factory inspection

07

2 years quality assurance, repair and replacement

4 factories

02

2 professional testing centers

04

High quality imported materials

06

COMPANY INFORMATION



扫描下方二维码: 获取详细产品信息及联系方式

ii) 本公司之 CNC 加工機，係由德國進口，其加工精度，係由德國進口之 CNC 加工機所決定，其加工精度，係由德國進口之 CNC 加工機所決定。

unit 本公司之 unit 係由德國進口，其加工精度，係由德國進口之 CNC 加工機所決定，其加工精度，係由德國進口之 CNC 加工機所決定。

iv) 本公司之 unit 係由德國進口，其加工精度，係由德國進口之 CNC 加工機所決定，其加工精度，係由德國進口之 CNC 加工機所決定。

v) 本公司之 unit 係由德國進口，其加工精度，係由德國進口之 CNC 加工機所決定，其加工精度，係由德國進口之 CNC 加工機所決定。

VI) 本公司之 unit 係由德國進口，其加工精度，係由德國進口之 CNC 加工機所決定，其加工精度，係由德國進口之 CNC 加工機所決定。

Exhibition Photos





:

[illegible][illegible]

0000: 00000000, 000000, hrdrdraulic, 0000000000000000 RKSfluid Actuators 000000000000000000
00000000 0000000000000000000000000000000000

:

```

#####: RKSfluid #####

```

□□□ : □□□□□□□□□□□□□□□□

[illegible]

□□□: mod

A: 1pc

:

0000: 0000000000000000 100% 000000000000000000 2 00 00000000000000000000000000000000
0000000000000000

□□□□□□□□ TUV, API, WRAS, CE, □□□□□□□□ ISO

DIN, ASME, BS EN, JIS, API, AWWA

[illegible]

RKSfluid 20 R&D 70