

DESIGN FEATURES

DURABLE




- No-pin connection, 1 pc blow-out proof stem
- DI/CI Nodularity over 95%

ANTI-CORROSION



- Material: Epoxy powder:  , Earth Best!
- Coating Thickness: 200-250µm
- Spraying temp: over 200°C. Doesn't fade, even wipe with diethyl ether

QUALITY STANDARD



- 100% quality test, follow DIN, ASTM, JIS, GB/T, ISO, BS EN, API
- ONLY ONE Manufacturer get CE certification up to DN1800
- 2 years warranty. 15000 times On-off test, 30000 times Destructive experiment

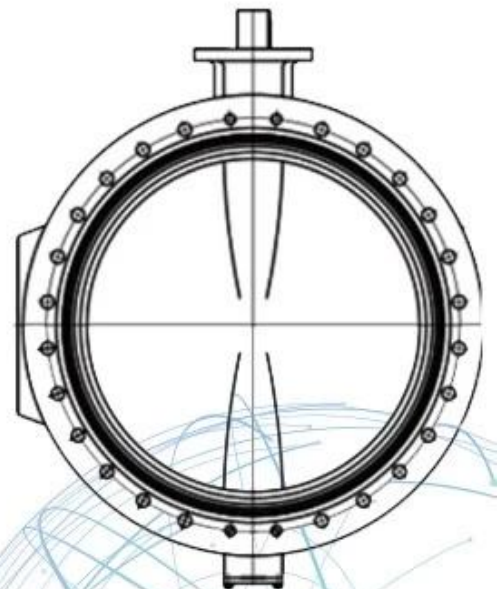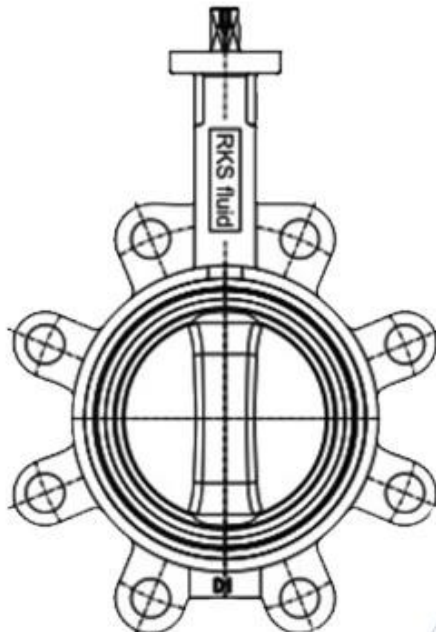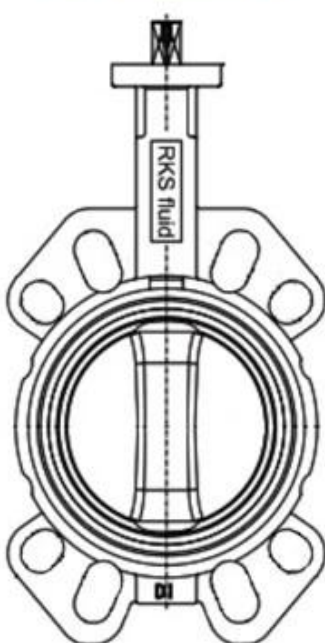


口径	DN32 - DN2400 (NPS1 1/4-NPS96)
公称压力	PN6 - PN10 - PN16 (Class 150)
使用温度	-40°C-120°C
密封材料	聚四氟乙烯, 金属密封
适用介质	NBR, EPDM, 海水, 工业用水, 蒸汽

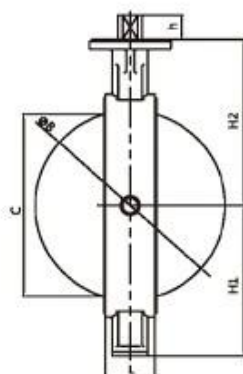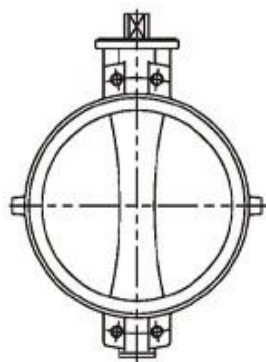

WAFER



LUG



NPS14-NPS40 Wafer/Lug with alignment holes

Size	L	H1	H2	h	A	ΦB	C	ΦG	a	b	ΦD	n-Φd	IS05211
NPS14	3.07	10.63	11.81	1.42	1.06	Φ13.31	12.95	-	-	-	Φ4.92	4-Φ0.55	F12
NPS16	4.02	11.81	13.58	1.69	1.26	Φ15.35	14.80	-	-	-	Φ5.50	4-Φ0.71	F14
NPS18	4.49	12.99	14.76	1.93	4.42	Φ17.20	16.61	-	-	-	Φ5.50	4-Φ0.71	F14
NPS20	5.00	15.16	16.73	2.56	-	Φ19.09	18.43	Φ2.36	0.71	2.52	Φ6.50	4-Φ0.87	F16
NPS24	6.06	17.24	19.49	2.76	-	Φ23.03	22.24	Φ2.36	0.71	2.52	Φ6.50	4-Φ0.87	F16
NPS28	6.50	20.39	22.44	3.15	-	Φ26.77	25.98	Φ2.76	0.79	2.93	Φ10.00	8-Φ0.71	F25
NPS30	6.50	21.46	24.02	3.15	-	Φ28.74	27.95	Φ2.76	0.79	2.93	Φ10.00	8-Φ0.71	F25
NPS32	7.48	22.32	25.20	3.15	-	Φ30.43	29.49	Φ2.76	0.79	2.93	Φ10.00	8-Φ0.71	F25
NPS36	7.99	25.59	27.56	3.94	-	Φ34.49	33.54	Φ3.15	0.87	3.35	Φ10.00	8-Φ0.71	F25
NPS40	8.50	28.15	29.53	3.94	-	Φ38.43	37.48	Φ3.15	0.87	3.35	Φ11.73	8-Φ0.87	F30

APPLICATION SCENARIO



Industrial water application



Power plant



Sea water desalination



Water treatment



Water supply and drainage



HAVC



Food and drug



Water transport



COMPANY INFORMATION



I 公司宗旨： 秉承“以人为本、科技领先、服务至上”的宗旨，致力于为客户提供高品质的产品和服务。

II 公司使命： 通过不断创新和卓越管理，实现经济效益和社会效益的双赢，为社会的可持续发展做出积极贡献。

III 公司愿景： 成为全球领先的水务解决方案提供商，为人类创造更加美好的生活。

IV 公司优势： 拥有先进的技术团队、完善的质量管理体系和强大的市场网络。

V 公司资质： GB, 国家高新技术企业, 质量管理体系认证, TUV CE, ISO 9001, ADWO-2000, TS, PED, WRC WRAS, KTW, API 6D, API609

VI 公司地址： 北京市海淀区中关村大街1号, 北京市, 中国, 邮编: 100080, 电话: 010-12345678, 传真: 010-87654321, 邮箱: info@company.com



01

21 years of professional experience

03

Independent research and development team
28 top senior professional researchers

05

100% high level ex-factory inspection

07

2 years quality assurance, repair and replacement

4 factories

02

2 professional testing centers

04

High quality imported materials

06


COMPANY QUALIFICATION



COMPANY EXHIBITION



Partners



0000: 0000000000000000 0000000000000000
 0000: 000000000000 00000000 00000000 00000000 000000000000

問問: 請問各位工程師對於這方面的經驗如何? 請問各位工程師?
 問問: 請問各位工程師, 請問各位工程師, Hrdraulic, 請問各位工程師 RKSfluid 請問各位工程師
 請問各位工程師

□□□ : □□□□□□□□□□□□□□□□□□□□□□□□?

Q: RKSfluid 製品はどのような用途に使用されますか？

A: 主に工業用流体の制御に使用されます。

Q: 製品のサイズはどのくらいありますか？

A: 標準サイズは 2 ~ 5 mm です。

Q: 1 台あたりの価格はいくらですか？

A: 製品価格についてはお問い合わせください。

A: 製品の品質保証は 100% です。保証期間は 2 年です。

製品の品質保証は 100% です。保証期間は 2 年です。

製品の品質保証は 100% です。保証期間は 2 年です。

製品の品質保証は 100% です。保証期間は 2 年です。

Q: 製品の仕様はどのようなものがありますか？

A: RKSfluid 製品の仕様は 20 mm 以内です。R&D 部門は 70 mm 以内の仕様を提供しています。

製品の仕様は 20 mm 以内です。R&D 部門は 70 mm 以内の仕様を提供しています。