


Athens



- | | |
|------|---|
| 口径 | DN200-DN1800 |
| 公称压力 | PN10 PN16 PN25 PN40 |
| 密封形式 | 弹性密封 |
| 环境温度 | ≤80° C |
| 执行标准 | EN 593 符合 EN1074-1/2 |
| 产品系列 | EN558 Series 13 符合 Series 14 |
| 应用场合 | 适用于水、蒸汽、HVAC、工业过程管道、石油管道、天然气输送管道、海水淡化系统、船舶系统、发电厂、化工厂、制药厂、食品加工等。 |

APPLICATION SCENARIO

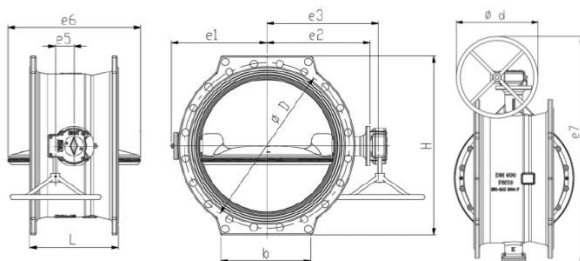

Industrial water application



Power plant



Sea water desalination



Water treatment



Water supply and drainage



HAVC



Food and drug



Water transport



COMPANY FACTORY



COMPANY INFORMATION



i 本公司拥有先进的生产设备，采用国际先进的生产工艺，确保产品质量稳定可靠。

ii 本公司拥有完善的质量管理体系，通过 ISO 9001 认证，严格执行国家标准，确保产品质量符合客户要求。

iii 本公司拥有专业的技术团队，具备丰富的行业经验，能够提供全方位的技术支持和售后服务。

iv 本公司拥有完善的生产流程，从原材料采购到成品出厂，每个环节都严格把控，确保产品质量。

v 本公司拥有完善的质量管理体系，通过 GB, ISO 9001, TUV CE, ADWO-2000, TS, PED, WRC WRAS, KTW, API 6D, API609 等认证，确保产品质量符合国际标准。

VI 本公司拥有完善的质量管理体系，通过 ISO 9001 认证，严格执行国家标准，确保产品质量符合客户要求。

01

21 years of professional experience

03

Independent research and development team
28 top senior professional researchers

05

100% high level ex-factory inspection

07

2 years quality assurance, repair and replacement

4 factories

02

2 professional testing centers

04

High quality imported materials

06

COMPANY QUALIFICATION



COMPANY EXHIBITION



Partners



[illegible]

A: 00, 00000, hrdraulic, 000000000000 RKSfluid 000000000000000000000000
0000000 000000000000000000000000

A: RKSfluid

[illegible][illegible][illegible]

DIN, ASME, BS EN, JIS, API, AWWA

Q: RKSfluid 27 R&D 70

A: RKSfluid 27 R&D 70