



RKSfluid®

A key Valve in Flow Control



Butterfly Valve



Ball Valve



Gate Valve



Globe Valve



Check Valve



Pipe Fittings

Product Description



Super Anti-corrosion
Epoxy powder coating **200-250µm**,
baking varnish over **200°C**,
use  material.



Free wedge nut, **reduces the stem bending forces** and at the same time enables it to be easily replaced.



The more compact new cap, reduces the water retention areas in order to **reduce the risk of bacterial growth**.



One piece stainless steel stem in for **better resistance to axial load and to with stand higher operating torques**.



Three locking tab for bayonet system prevents self-dismantling.



Dust guard integrating three O-ring shape, **prohibiting the introduction of foreign bodies** at the stem.



Male guiding system with composite sliding skate reduces the wear of the wedge against the body, allowing a smooth functionality and a longer life time of the valve.



Triple seal at the operating stem to ensure tightness with the test of time (2500 cycles).




New male composite sliding skate technology ensuring a low operating torque even under high differential pressure and preventing damage or corrosion generated by the friction.

Four factories



Why choose us

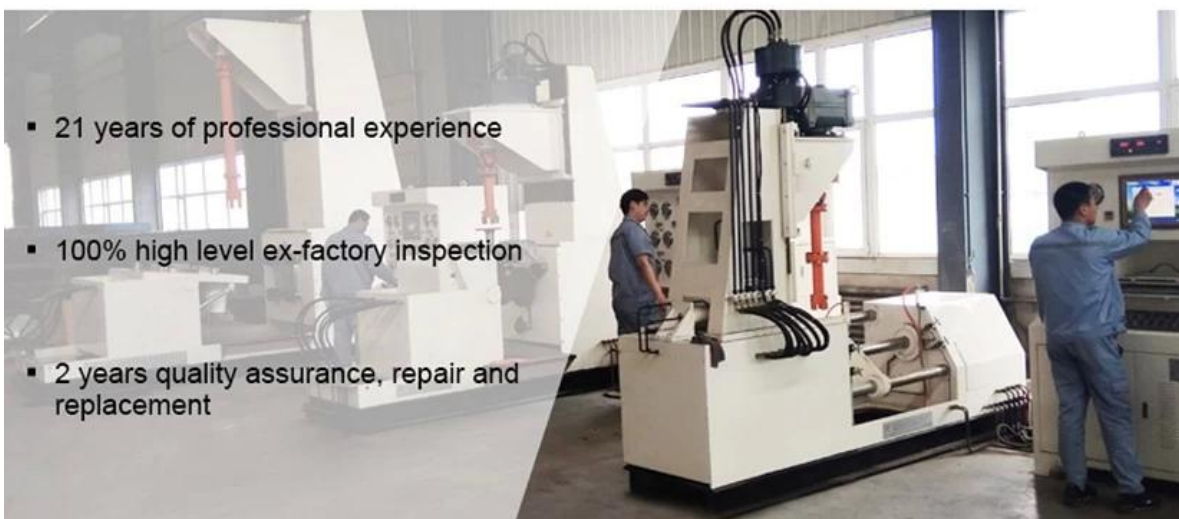

Q: RKSfluid, hydraulic, RKSfluid Actuators
RKSfluid Actuators

Q: RKSfluid Actuators?

A: RKSfluid Actuators

Q: RKSfluid Actuators

A: RKSfluid Actuators 2 ~ 5 RKSfluid Actuators

Q: RKSfluid Actuators

A: 1 RKSfluid Actuators

Q: RKSfluid Actuators?

A: RKSfluid Actuators 100% RKSfluid Actuators 2 RKSfluid Actuators

RKSfluid TUV, API, Wras, CE, RKSfluid ISO

RKSfluid DIN, ASME, BS EN, JIS, API, AWWA

Q: RKSfluid Actuators

A: RKSfluid Actuators 20 RKSfluid Actuators 70 R & D RKSfluid Actuators