



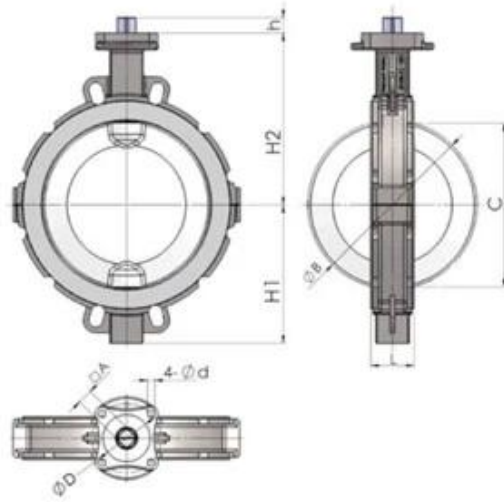

Wafer

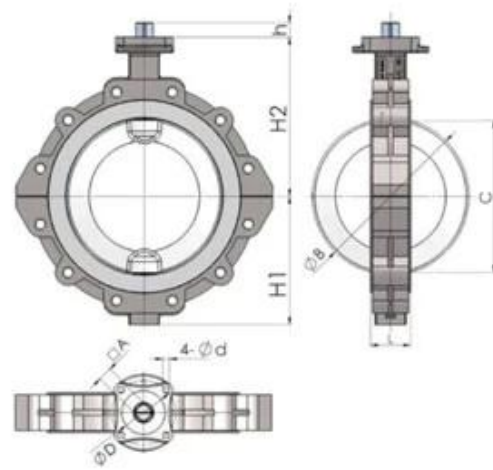

Lug

IMPERIAL DIMENSIONS:Inches										
Size	L	H1	H2	h	A	B	C	D	d	IS05211
NPS2	1.69	2.20	5.31	0.47	0.43	2.01	1.08	1.97	0.28	F05
NPS2 1/2	1.81	3.35	5.91	0.47	0.43	2.72	1.99	1.97	0.28	F05
NPS3	1.81	3.74	6.30	0.63	0.55	3.27	2.70	2.76	0.35	F07
NPS4	2.05	4.13	7.09	0.63	0.55	4.06	3.50	2.76	0.35	F07
NPS5	2.20	4.92	7.68	0.63	0.55	5.00	4.49	2.76	0.35	F07
NPS6	2.20	5.71	10.04	0.63	0.55	5.98	5.57	2.76	0.35	F07
NPS8	2.36	6.69	9.45	0.83	0.75	7.99	7.64	4.02	0.47	F10
NPS10	2.68	8.07	11.81	0.94	0.87	10.00	9.65	4.92	0.51	F12
NPS12	3.07	9.84	12.20	1.14	1.06	12.01	11.61	4.92	0.51	F12



PTFE Butterfly Valve



PTFE Butterfly Valve



PTFE Butterfly Valve

BSEN 1092, DIN 2501, ANSI, JIS, AS2129

Size: DN50~DN600

Body: Ductile Iron

Disc: Ductile Iron+PTFE

Seat: PTFE

Connection: Wafer, Lug, Flange

BSEN 1092, DIN 2501, ANSI, JIS, AS2129

Size: DN50~DN600

Body: Ductile Iron

Disc: Ductile Iron+PTFE

Seat: PTFE

Connection: Wafer, Lug, Flange

BSEN 1092, DIN 2501, ANSI, JIS, AS2129

Size: DN50~DN600

Body: WCB, CF8, CF8M

Disc: CF8+PTFE, CF8M+PTFE

Seat: PTFE

Connection: Wafer, Lug



PTFE Butterfly Valve



PTFE Butterfly Valve



PTFE Butterfly Valve

BSEN 1092, DIN 2501, ANSI, JIS, AS2129

Size: DN50~DN600

Body: WCB, CF8, CF8M

Disc: CF8+PTFE, CF8M+PTFE

Seat: PTFE

Connection: Wafer, Lug

BSEN 1092, DIN 2501, ANSI, JIS, AS2129

Size: DN50~DN600

Body: Ductile Iron

Disc: CF8, CF8M

Seat: PTFE

Connection: Wafer, Lug, Flange

BSEN 1092, DIN 2501, ANSI, JIS, AS2129

Size: DN50~DN600

Body: WCB

Disc: CF8 +PTFE, CF8 +PFA

Seat: PTFE

Connection: Wafer, Lug, Flange

APPLICATION SCENARIO



Industrial water application



Nuclear plant



Petroleum



Steel



Wastewater treatment



Acid-base



Food



Irrigation



Company Advantages

01

21 years of professional experience

03

Independent research and development team
28 top senior professional researchers

05

100% high level ex-factory inspection

07

2 years quality assurance, repair and replacement

4 factories

02

2 professional testing centers

04

High quality imported materials

06



1. 公司优势：21 年专业经验，独立研发团队，28 名高级专业研究人员，100% 出厂前高级检查，2 年质量保证、维修和更换，4 家工厂，2 个专业测试中心，高质量进口材料。

2. 公司优势：21 年专业经验，独立研发团队，28 名高级专业研究人员，100% 出厂前高级检查，2 年质量保证、维修和更换，4 家工厂，2 个专业测试中心，高质量进口材料。

3. 公司优势：21 年专业经验，独立研发团队，28 名高级专业研究人员，100% 出厂前高级检查，2 年质量保证、维修和更换，4 家工厂，2 个专业测试中心，高质量进口材料。

IV 公司优势：21 年专业经验，独立研发团队，28 名高级专业研究人员，100% 出厂前高级检查，2 年质量保证、维修和更换，4 家工厂，2 个专业测试中心，高质量进口材料。



Q:

Q:

Q:

Q:

Q:

Q:

□□□□ TUV, API, WRAS, CE, □□□□□□□□□□ ISO

DIN, ASME, BS EN, JIS, API, AWWA

Q: 2019年10月1日起，中国境内所有企业生产的汽车，都必须符合国六排放标准。请问，RKSfluid是否已经通过了国六排放标准的认证？

A: RKSfluid 2019年10月1日起，中国境内所有企业生产的汽车，都必须符合国六排放标准。R & D 70 2019年10月1日起，中国境内所有企业生产的汽车，都必须符合国六排放标准。